


N.I.F.: B-87969416

**gm** **GUEMISA**

SENSORES E INSTRUMENTACION GUEMISA S.L.  
C/ Del Electrodo, 68 Oficina-23 28522 Rivas Vaciamadrid (Madrid)  
Tfno.: 91 764 21 00 info@guemisa.com



# PRODUCT CATALOG

2022





# TABLE OF CONTENTS

## OPENING CREDITS

Company history	2
TriOS G2 Interface	4

## PHOTOMETER

OPUS	8
OPUS aero	12
NICO	14
NICO plus	16
LISA UV	18
VIPER	20
LISA color	24

## FLUOROMETER

enviroFlu	30
nanoFlu	34
matrixFlu VIS	36
microFlu V2	38
microFlu V2 HC	40

## RADIOMETER

RAMSES	44
RAMSES G2	47

## eCHEM

pH Sensor TpH	52
Differential pH Sensor TpH-D	54
TTurb	56
Conductivity Sensor	58
Inductive Conductivity Sensor	60
Dissolved Oxygen Sensor	62
Free Chlorine Sensor	64
Chlorine Dioxide Sensor	66
Total Chlorine	68

## CONTROLLER

TriBox3	72
TriBox mini	74
TriBox mini NET	74
HS100	76

## DRY STANDARDS

SolidCAL	80
FieldCAL	81

DryCAL	82
TTurbCAL	82

## ACCESSORIES

G2 Interface Box	87
TTrig	88
SDI-12 Converter	89
FC 68 FlowCell	90
FC 48 FlowCell	90
Ultrasonic FlowCell	91
FlowCells for eCHEM Sensors	92
FlowCells for nanoFlu	93
FlowCell for Turbidity Sensors	93
Sedimeter	94
Wiper W55 V2	95
AirShot2	96
Solenoid Valve V2	97
Modbus Interface Board	98
TAMMO	99
Float	100
Pipe Adapter	101
Telescopic Rod	102
RAMSES Frames	103
CL48 & CL68 Hydraulic Clamps	103
Water Quality Panel	104
pH Buffer Set	105
Panels	106
Flange	106
Compressed-air Cleaning Head	106
Protective Cage	107
Cuvette Holder	107
VALtub	107
Optics Cleaning Set	108
Cables	108
5-input M12 Sensor Connector Box	108

## SYSTEMS

EGC Water Analyzer	112
MEAS100	114
Wall-Mounted Sampler	116

## ANNEX

119
-----



## A success story.

When TriOS Mess- und Datentechnik GmbH was founded in 1998, the further development path was not foreseeable. With the R&D project funded under the project name RAMSES by the BMBF (Federal Ministry of Education and Research), the foundation stone for a success story in optical measurement technology was laid during the founding phase of TriOS GmbH. RAMSES was the first spectral-resolution light measurement instrument available on the market for use in marine research.

Today, the product name „RAMSES“ is synonymous with compact, robust and reliable light measurements, with over a thousand instruments in use worldwide - the clear No. 1 in the world. The instruments are routinely used to measure light distribution in the water column as well as for validation and calibration of advanced environmental satellite data (e.g. MERIS). The sensors have proven their reliability in many adverse environmental conditions, such as in Antarctica, but also in unusual locations such as offshore racing yachts in the Volvo Ocean Race. Many Norwegian

vacationers accompany the devices, even if certainly not consciously perceived, on their journey along the fjords on the ships of the Hurtigruten.

Today, the former university spin-off, which has been managed by Rüdiger Heuermann alone since 2000, has become a leading company in the field of optical immersion sensors.

In addition to the original RAMSES radiometers, the TriOS product range has expanded visibly. Innovative measuring instruments for algae detection, for the measurement of smallest amounts of oil in water, the reagent-free determination of nutrients and organic substances followed, whereby the business field of TriOS Mess- und Datentechnik GmbH has expanded far beyond the field of marine technology into water quality, drinking water and wastewater monitoring and many industrial applications. Among other things, TriOS is one of the leading companies in the field of oil-in-water monitoring and thus makes a significant contribution to reducing environmental pollution caused by oil discharges.

With the expansion of the product range and the





increase in the number of units produced, the need for production space and qualified employees grew. Thus, the move to the newly built company headquarters in Rastede took place in July 2011. This laid the foundation for significantly increasing the vertical range of manufacture by means of in-house CNC machining, modern PCB assembly and device production, and thus having all quality-relevant processes in-house. In 2019, the company premises were also expanded with additional warehouse and production buildings to meet the enormous market demand. Equipped with state-of-the-art technology, this has also allowed development to grow and deepen in-house. Almost all TriOS products thus rightly bear the status „Made in Germany“. TriOS has remained true to its drive for innovation. One of the latest TriOS products on the market is the EGC Water Analyzer - a measuring cabinet for determining various parameters in wash water from exhaust gas scrubbers on ships. It can be equipped with three types of sensors: the enviroFlu for PAH, the TTurb for turbidity and the

TpH-D for pH. In addition, the flow rate, temperature as well as the turbidity-corrected PAH value can be determined.

In addition, novel sensors for environmentally relevant parameters are currently being developed in several research projects in cooperation with universities and research institutes. Many of our customers are also partners in the development of new products.

My special thanks, also on behalf of all TriOS employees, go to these partners, without whom TriOS would not exist in its current form.

Rüdiger Heuermann  
Managing Director



## The TriOS G2 Interface

The rapid change in the way we communicate and interact with technology has been evident not only since the ubiquitous spread of smartphones. This development is also having more and more influence on measurement technology. To meet these requirements, TriOS has developed the innovative

G2 interface concept which, in addition to a very flexible connection to process control systems and data acquisition systems, also enables intuitive configuration and operation using operating system-independent web browsers.



All G2 sensors are equipped with an internal memory. This enables the storage of all measurement data and events. The easiest way to establish a connection to the G2 sensors is to use the G2 interface box (with or without WiFi module). The box is used for establishing the connection as well as for the power supply and can be used universally for all TriOS G2 sensors.

## Three steps into the TriOS G2 interface

1. Connect



2. Open browser



3. Enter URL

<http://192.168.77.1/> or [http://OPUS\\_7063](http://OPUS_7063)

Ready!

**Overview**

**Sensor**

- Type: OPUS (UV, Digital)
- Serial Number: OPUS\_706C
- Firmware Version: 1.3.14
- Description:

**Lamp**

- Type: EPA
- Serial Number: 013B
- Shot Counter: 518339

**Calibration**

**Waterbase**

Spectrum

**Settings**

Path Length [mm]: 10

Parameter Set: 022R70EC

**Measurement**

Measure now!

Parameter	Raw Value	Offset	Scaling	Scaled Value
CODeq [mg/l]	1.18	0	1	1.18
DOCeq [mg/l]	24.7	0	1	24.7
N-NO3 [mg/l]	1.47	0	1	1.47
Abs210 [AU]	2.01	0	1	2.01
Abs254 [AU]	0.757	0	1	0.757
Abs360 [AU]	0.305	0	1	0.305
COD_SACeq [mg/l]	65.9	0	1	65.9
SAC254 [1/m]	45.1	0	1	45.1
SQI [1]	1	0	1	1
TSSeq [mg/l]	79.4	0	1	79.4

**Peripherals**

**Digital I/O Settings**

- Transceiver: RS-485
- Protocol: Modbus RTU
- Baudrate: 9600
- Flow Control: None
- Parity: None
- Stop Bits: One

**Protocol Settings**

Address: 1





PHOTOMETER

## OPUS

12SXXXXX0



OPUS is the new generation of spectral sensors for online measurement of nitrogen and carbon compounds. Through the analysis of a full spectrum, OPUS is able to deliver reliable readings for  $\text{NO}_3\text{-N}$ ,  $\text{NO}_2\text{-N}$ , organic ingredients ( $\text{COD}_{\text{eq}}$ ,  $\text{BOD}_{\text{eq}}$ ,  $\text{DOC}_{\text{eq}}$ ,  $\text{TOC}_{\text{eq}}$ ), and a number of other parameters.

OPUS features the new TriOS G2 interface, allowing fast and easy configuration of sensors by using

a web browser. Integration into existing process control systems and external data loggers has never been easier.

With the optional battery pack, mobile applications are also feasible. WiFi connectivity allows laptops, tablets or smartphones to be easily used for control without any special application software or app installation.


### Benefits

- Without sampling and preparation of test samples
- Real-time sensor
- Without reagents
- Optical window with nano coating
- Pre-installed application calibration

### Applications

- Sewage treatment plants
- Environmental monitoring
- Drinking water monitoring
- Industrial applications

### Absorption spectrum with/without CODEq

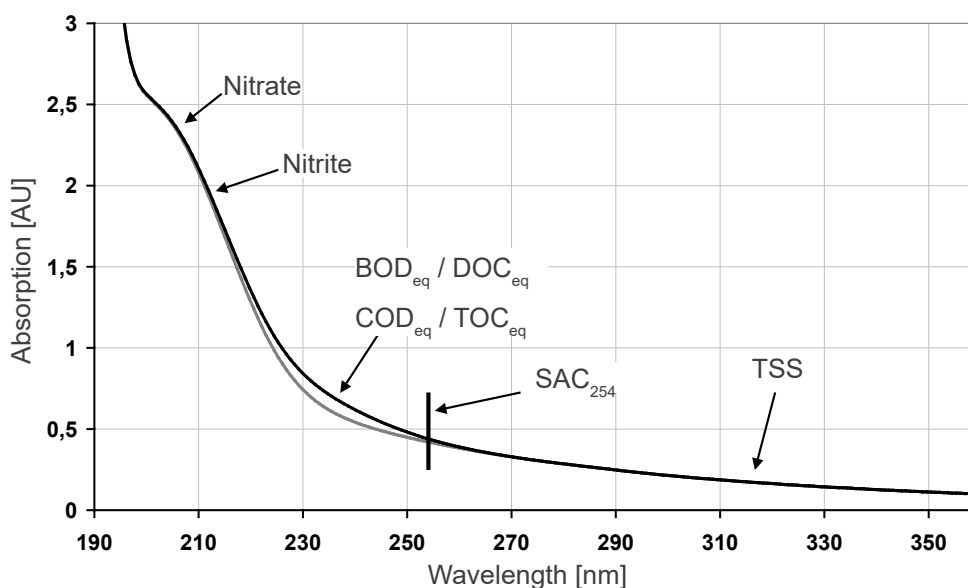

## Technical Specifications

<b>Measurement technology</b>	light source	Xenon flash lamp	
	detector	High-end miniature spectrometer	
		256 Channels	
		200 to 360 nm	
		0.8 nm/pixel	
<b>Measurement principle</b>		Attenuation, spectral analysis	
<b>Optical path</b>		0.3 mm, 1 mm, 2 mm, 5 mm, 10 mm, 50 mm	
<b>Parameter</b>		See parameter list p. 10	
<b>Measuring range</b>		See parameter list p. 10	
<b>Measurement accuracy</b>		See parameter list p. 10	
<b>Turbidity compensation</b>		Yes	
<b>Data logger</b>		~ 2 GB	
<b>T100 response time</b>		2 min	
<b>Measurement interval</b>		≥ 1 min	
<b>Housing material</b>		Stainless steel (1.4571/1.4404), titanium (3.7035), Deep Sea Version: titanium (3.7035)	
<b>Dimensions (L x Ø)</b>		~ 470 mm x 48 mm (10 mm path) Deep Sea Version: ~ 511 x 59 mm	~ 18.5" x 1.9" (with 10 mm path) Deep Sea Version: ~ 20.1" x 2.3"
<b>Weight</b>	stainless steel	~ 3 kg (with 10 mm path)	~ 6.6 lbs (with 10 mm path)
	titanium	~ 2 kg Deep Sea Version: ~ 4 kg	~ 4.4 lbs Deep Sea Version: ~ 8.8 lbs
<b>Interface</b>	digital	Ethernet (TCP/IP)	
		RS-232 or RS-485 (Modbus RTU)	
<b>Power consumption</b>		≤ 8 W	
<b>Power supply</b>		12...24 VDC (± 10 %)	
<b>Maintenance effort</b>		≤ 0.5 h/month (typical)	
<b>Calibration/maintenance interval</b>		24 months	
<b>System compatibility</b>		Modbus RTU	
<b>Warranty</b>		1 year (EU: 2 years)	US: 2 years
<b>Max. pressure</b>	with SubConn	30 bar Deep Sea Version: 600 bar	~ 435 psig Deep Sea Version: ~ 8702.26 psig
	with fixed cable	3 bar	~ 43.5 psig
	in FlowCell	1 bar, 2...4 L/min	~ 14.5 psig at 0.5 to 1.0 gpm
<b>Protection type</b>		IP68	NEMA 6P
<b>Sample temperature</b>		+2...+40 °C	~ +36 °F to +104 °F
<b>Ambient temperature</b>		+2...+40 °C	~ +36 °F to +104 °F
<b>Storage temperature</b>		-20...+80 °C	~ -4 °F to +176 °F
<b>Inflow velocity</b>		0.1...10 m/s	~ 0.33 fps to 33 fps



# PHOTOMETER // OPUS

## Measuring Range

Single parameter under optimum laboratory conditions

Path (mm)	Parameter	Measurement principle	Unit	Measuring range	Detection limit	Limit of determination	Precision	Accuracy*
1	Nitrate NO <sub>3</sub> -N	Spectral	mg/L	0...100	0.3	0.5	0.05	± (5 % + 0.1)
	Nitrite NO <sub>2</sub> -N	Spectral	mg/L	0...150	0.5	1.2	0.12	± (5 % + 0.1)
	COD <sub>eq</sub>	Spectral	mg/L	0...2200***	30	100	10	
	BOD <sub>eq</sub>	Spectral	mg/L	0...2200***	30	100	10	
	DOC <sub>eq</sub>	Spectral	mg/L	0...1000	5	10	1	
	TOC <sub>eq</sub>	Spectral	mg/L	0...1000	5	10	1	
	TSS <sub>eq</sub>	Spectral	mg/L	0...1500	60	200	20	
	KHP	Spectral	mg/L	0...4000	5	10	1	± (5 % + 2)
	SAC <sub>254</sub>	Single wavelength	1/m	0...2200	15	50	5	
	COD-SAC <sub>eq</sub> **	Single wavelength	mg/L	0...3200	22	73	7.3	
	BOD-SAC <sub>eq</sub> **	Single wavelength	mg/L	0...1050	7.2	24	2.4	
10	Nitrate NO <sub>3</sub> -N	Spectral	mg/L	0...10	0.03	0.05	0.005	± (5 % + 0.01)
	Nitrite NO <sub>2</sub> -N	Spectral	mg/L	0...15	0.05	0.12	0.012	± (5 % + 0.01)
	COD <sub>eq</sub>	Spectral	mg/L	0...220***	3	10	1	
	BOD <sub>eq</sub>	Spectral	mg/L	0...220***	3	10	1	
	DOC <sub>eq</sub>	Spectral	mg/L	0...100	0.5	1	0.1	
	TOC <sub>eq</sub>	Spectral	mg/L	0...100	0.5	1	0.1	
	TSS <sub>eq</sub>	Spectral	mg/L	0...150	6	20	2	
	KHP	Spectral	mg/L	0...400	0.5	1	0.1	± (5 % + 0.2)
	SAC <sub>254</sub>	Single wavelength	1/m	0...220	1.5	5	0.5	
	COD-SAC <sub>eq</sub> **	Single wavelength	mg/L	0...320	2.2	7.3	0.73	
	BOD-SAC <sub>eq</sub> **	Single wavelength	mg/L	0...105	0.72	2.4	0.24	

\* Based on a standard calibration solution

\*\* Based on KHP (100 mg/L COD standard solution correspond to 85 mg/L KHP)

\*\*\* Depending on composition of COD and BOD (checksum parameter)

1 mg/L NO<sub>3</sub>-N correspond to 4.43 mg/L NO<sub>3</sub>

1 mg/L NO<sub>2</sub>-N correspond to 3.28 mg/L NO<sub>2</sub>



## OPUS G2 Interface

The easiest and fastest way of sensor integration and configuration in any process control system or data logger via web browser:

Let OPUS automatically monitor your processes and react to unexpected events or incidents with the optional "policing" feature of OPUS.



## OPUS aero

12SXXXXXX



OPUS aero is the new generation of spectral sensors for online measurement of nitrate and nitrite in wastewater aeration tank. By analyzing a complete spectrum, OPUS aero is able to provide reliable readings for either  $\text{NO}_3\text{-N}$  only or  $\text{NO}_3\text{-N}$  and  $\text{NO}_2\text{-N}$ , depending on the calibration.

OPUS features the new TriOS G2 interface, allowing fast and easy configuration of sensors by using

a web browser. Integration into existing process control systems and external data loggers has never been easier.

WiFi connectivity allows laptops, tablets or smartphones to be easily used for control without any special application software or app installation.

### Benefits

- Without sampling and preparation of test samples
- Real-time sensor
- Without reagents
- Optical window with nano coating
- Pre-installed application calibration

### Applications

- Wastewater aeration tank

Path (mm)	Nitrate N- $\text{NO}_3$	Nitrite N- $\text{NO}_2$
0,3	2.4...120	4.4..220
1	0.7...36	1.3...67
2	0.35...18	0.65...33.5

## Technical Specifications

<b>Measurement technology</b>	light source	Xenon flash lamp	
	detector	High-end miniature spectrometer	
		256 Channels	
		200 to 360 nm	
		0.8 nm/pixel	
<b>Measurement principle</b>		Attenuation, spectral analysis	
<b>Optical path</b>		0.3 mm, 1 mm, 2 mm	
<b>Parameter</b>		Nitrate NO <sub>3</sub> -N or Nitrate NO <sub>3</sub> -N+Nitrite NO <sub>2</sub> -N	
<b>Measuring range</b>		See parameter list	
<b>Measurement accuracy</b>		± (5 % + 0.1)	
<b>Turbidity compensation</b>		Yes	
<b>Data logger</b>		~ 2 GB	
<b>T100 response time</b>		2 min	
<b>Measurement interval</b>		≥ 1 min	
<b>Housing material</b>		Stainless steel (1.4571/1.4404)	
<b>Dimensions (L x Ø)</b>		~ 470 mm x 48 mm	~ 18.5" x 1.9"
<b>Weight</b>	stainless steel	~ 3 kg	~ 6.6 lbs
<b>Interface</b>	digital	Ethernet (TCP/IP)	
		RS-232 or RS-485 (Modbus RTU)	
<b>Power consumption</b>		≤ 8 W	
<b>Power supply</b>		12...24 VDC (± 10 %)	
<b>Maintenance effort</b>		≤ 0.5 h/month (typical)	
<b>Calibration/maintenance interval</b>		24 months	
<b>System compatibility</b>		Modbus RTU	
<b>Warranty</b>		1 year (EU: 2 years)	USA: 2 years
<b>Max. pressure</b>	with fixed cable	3 bar	~ 43.5 psig
	in FlowCell	1 bar, 2...4 L/min	~ 14.5 psig at 0.5 to 1.0 gpm
<b>Protection type</b>		IP68	NEMA 6P
<b>Sample temperature</b>		+2...+40 °C	~ +36 °F to +104 °F
<b>Ambient temperature</b>		+2...+40 °C	~ +36 °F to +104 °F
<b>Storage temperature</b>		-20...+80 °C	~ -4 °F to +176 °F
<b>Inflow velocity</b>		0.1...10 m/s	~ 0.33 fps to 33 fps

## NICO 15SXXXXXX



### The Low-Cost Nitrate Meter from TriOS

Based on the innovative instrument platform concept of TriOS, on which OPUS, LISA and VIPER, among others, are based, NICO is a cost-effective UV photometer for nitrate determination. The three detection channels provide precise optical nitrate determination by absorption, taking into account turbidity and organics, which are a problem with many products currently on the market.

An internal temperature correction additionally increases the stability of the measured values.

Equipped with our innovative G2 interface with web browser configuration and internal data logger, NICO has features that are significantly above the currently available devices on the market, in combination with an attractive price.

The uniform instrument platform of all TriOS photometers also stands for a uniform spare parts and consumables system, which enables the use of the wide range of accessories available for our instruments. The modern G2 interface also offers fast integration into third-party systems.

### Benefits

- Proven UV-absorption method
- Without sampling and preparation of test samples
- Real-time sensor
- Without reagents
- Optical window with nano coating

### Applications

- Sewage treatment plants
- Environmental monitoring
- Drinking water monitoring



## Technical Specifications

<b>Measurement-technology</b>	light source	Xenon flash lamp	
	detector	4 photo diodes + filter	
<b>Measurement principle</b>		Attenuation	
<b>Optical path</b>		0.3 mm, 1 mm, 2 mm, 5 mm, 10 mm, 50 mm	
<b>Parameters</b>		NO <sub>3</sub> -N, NO <sub>3</sub> , NO <sub>x</sub> -N, NO <sub>x</sub> (calibrated with NO <sub>3</sub> standard solution)	
<b>Measurement range</b>	1 mm path	0.5...60 mg/L NO <sub>3</sub> -N	
	10 mm path	0.05...6 mg/L NO <sub>3</sub> -N	
<b>Measurement accuracy</b>		± (5 % + 0.1 mg/L NO <sub>3</sub> -N) with 10 mm path ± (5 % + 1 mg/L NO <sub>3</sub> -N) with 1 mm path	
<b>Turbidity compensation</b>		Yes	
<b>Data Logger</b>		~ 2 GB	
<b>Reaction time T100</b>		20 s	
<b>Measurement interval</b>		≥ 10 s	
<b>Housing material</b>		Stainless steel (1.4571/1.4404), titanium (3.7035),	
<b>Dimensions (L x Ø)</b>		~ 470 mm x 48 mm (10 mm path)	~ 18.5" x 1.9" (with 10 mm path)
<b>Weight</b>	stainless steel	~ 3 kg	~ 6.6 lbs
	titanium	~ 2 kg	~ 4.4 lbs
<b>Interface</b>	digital	Ethernet (TCP/IP)	
		RS-485 (Modbus RTU)	
<b>Power consumption</b>		≤ 7 W	
<b>Power supply</b>		12...24 VDC (± 10 %)	
<b>Required supervision</b>		Typically ≤ 0.5 h/month	
<b>Calibration / maintenance interval</b>		24 months	
<b>System compatibility</b>		Modbus RTU	
<b>Warranty</b>		1 year (EU: 2 years)	US: 2 years
<b>Max. pressure</b>	with Subconn	30 bar	~ 435 psig
	with fixed cable	3 bar	~ 43.5 psig
	in FlowCell	1 bar, 2...4 L/min	~ 14.5 psig at 0.5 to 1.0 gpm
<b>Protection type</b>		IP68	NEMA 6P
<b>Sample temperature</b>		+2...+40 °C	~ +36 °F to +104 °F
<b>Ambient temperature</b>		+2...+40 °C	~ +36 °F to +104 °F
<b>Storage temperature</b>		-20...+80 °C	~ -4 °F to +176 °F
<b>Inflow velocity</b>		0.1...10 m/s	~ 0.33 to 33 fps



## NICO plus

16AXX10X0



The new all-rounder from TriOS - Now with a new turbidity compensation\*

As a new all-rounder, NICO plus not only offers the parameters  $\text{NO}_3\text{-N}$ ,  $\text{NO}_3$ ,  $\text{NO}_x\text{-N}$  and  $\text{NO}_x$  previously known from NICO, but has now been expanded to include numerous parameters. These include  $\text{UVT}_{254}$ ,  $\text{UVT}_{254n}$ ,  $\text{SAK}_{254}$ ,  $\text{CSB}_{\text{eq}}$ ,  $\text{BSB}_{\text{eq}}$ ,  $\text{TOC}_{\text{eq}}$ ,  $\text{DOC}_{\text{eq}}$ , turbidity and  $\text{TSS}_{\text{eq}}$ .

An internal temperature correction additionally increases the stability of the measured values.

Equipped with our innovative G2 interface with web browser configuration and internal data logger, NICO plus has features that are significantly above the currently available devices on the market, in combination with an attractive price.

The instrument platform of all TriOS photometers stands for uniform spare parts and consumables and universal use of the wide range of accessories.

Parameter	Measuring range (at 10 mm)	Detection limit
$\text{NO}_3$	0.22... 22 ppm	0.22 ppm
$\text{NO}_3\text{-N}$	0.05...5 ppm	0.05 ppm
$\text{NO}_x$	0.22... 22 ppm	0.22 ppm
$\text{NO}_x\text{-N}$	0.05...5 ppm	0.05 ppm
$\text{UVT}_{254}$	25...96.6 %	96.6 %
$\text{UVT}_{254n}$	25...96.6 % (referred to 10 mm cuvettes)	96.6 % (referred to 10 mm cuvettes)
$\text{SAC}_{254**}$	1.5...60 1/m	1.5 1/m
$\text{COD}_{\text{eq}}$	2.2...90 ppm	2.2 ppm
$\text{BOD}_{\text{eq}}$	0.7...30 ppm	0.7 ppm
$\text{TOC}_{\text{eq}}$	1...35 ppm	1 ppm
$\text{DOC}_{\text{eq}}$	1...35 ppm	1 ppm
Turb	5...200 FAU***	5 FAU***
$\text{TSS}_{\text{eq}}$	5...180 ppm	5 ppm

\* Turbidity measurement according to DIN EN ISO 7027

\*\* based on the procedure DIN 38404 - C3

\*\*\* FAU: Formazine Attenuation Unit

## Technische Spezifikationen

<b>Measurement technology</b>	light source	Xenon flash lamp	
	detector	4 photo diodes + filter	
<b>Measurement principle</b>		Attenuation	
<b>Optical path</b>		0.3 mm, 1 mm, 2 mm, 5 mm, 10 mm, 20 mm, 50 mm	
<b>Parameters</b>		See parameter list	
<b>Measurement range</b>		See parameter list	
<b>Measurement accuracy</b>		± (5 % + 2-fold detection limit)	
<b>Turbidity compensation</b>		Yes	
<b>Data Logger</b>		~ 2 GB	
<b>Reaction time T100</b>		20 s	
<b>Measurement interval</b>		≥ 10 s	
<b>Housing material</b>		Stainless steel (1.4571/1.4404)	
<b>Dimensions (L x Ø)</b>		~ 470 x 48 mm (with 10 mm path)	~ 18.5" x 1.9" (with 10 mm path)
<b>Weight</b>	VA	~ 3 kg	~ 6.6 lbs
<b>Interface</b>	digital	Ethernet (TCP/IP)	
		RS-485 (Modbus RTU)	
<b>Power consumption</b>		≤ 7 W	
<b>Power supply</b>		12 – 24 VDC (± 10 %)	
<b>Required supervision</b>		Typically ≤ 0.5 h/month	
<b>Calibration/maintenance interval</b>		24 months	
<b>System compatibility</b>		Modbus RTU	
<b>Warranty</b>		1 year (EU & USA: 2 years)	USA: 2 years
<b>Max. pressure</b>	with SubConn	30 bar	~ 435 psig
	with fixed cable	3 bar	~ 43.5 psig
	in FlowCell	1 bar, 2...4 L/min	~ 14.5 psig at 0.5 to 1.0 gpm
<b>Protection type</b>		IP68	NEMA 6P
<b>Sample temperature</b>		+2...+40 °C	~ +36 °F to +104 °F
<b>Ambient temperature</b>		+2...+40 °C	~ +36 °F to +104 °F
<b>Storage temperature</b>		-20...+80 °C	~ -4 °F to +176 °F
<b>Inflow velocity</b>		0.1...10 m/s	~ 0.33 to 33 fps

## LISA UV

14SXXXXX0



### LISA – The innovative SAC<sub>254</sub> sensor by TriOS

Long-lasting and energy-efficient UV-LED technology and a robust design are the outstanding features of LISA UV. Like all TriOS sensors LISA uses the unique nanocoated windows combined with compressed air flushing to achieve long operating times without cleaning.

The innovative TriOS G2 interface allows quick and easy integration of the sensor into existing process control systems or external data logger. In addition to the integrated network interface, LISA UV is available with digital or analog output. The sensor

can easily be configured through any standard web browser on a PC, tablet or Smartphone.

The optical path length can be adapted to the application at any time by various adapters. An automatic turbidity compensation is carried out via a second measuring channel.

Through application-specific correlation LISA UV can be configured for direct output of BOD<sub>eq</sub>, COD<sub>eq</sub>, TOC<sub>eq</sub> and UVT.

LISA – Cutting-edge measurement technology at low investment and operating costs.

### Benefits

- Without sampling and preparation of test samples
- Real-time sensor
- Without reagents
- Optical window with nano coating
- LED technology

### Applications

- Sewage treatment plants
- Environmental monitoring
- Drinking water
- Monitoring of UV-disinfection systems

Path length	Parameter	Measuring range	Detection limit
1 mm	SAC <sub>254nm</sub> *	0-1500 /m	5 /m
	COD <sub>eq</sub>	0-2200 mg/L	8 mg/L
	BOD <sub>eq</sub>	0-700 mg/L	2.5 mg/L
	TOC <sub>eq</sub>	0-880 mg/L	3 mg/L
	UVT	3-100 %	98.8 %
10 mm	SAC <sub>254nm</sub> *	0-150 /m	0.5 /m
	COD <sub>eq</sub>	0-220 mg/L	0.8 mg/L
	BOD <sub>eq</sub>	0-70 mg/L	0.25 mg/L
	TOC <sub>eq</sub>	0-90 mg/L	0.3 mg/L
	UVT	3-100 %	98.8 %

\* following the DIN 38404 - C3 procedure



## Technical Specifications

<b>Measurement technology</b>	light source	2 LED (254 nm, 530 nm)	
	detector	Photo diode + filter	
<b>Measurement principle</b>		Attenuation, Transmission	
<b>Optical path</b>		1 mm, 2 mm, 5 mm, 10 mm, 50 mm	
<b>Parameter</b>		SAK <sub>254</sub> , CSB <sub>eq</sub> , BSB <sub>eq</sub> , TOC <sub>eq</sub> , UVT	
<b>Measuring range</b>		See parameter list	
<b>Measurement accuracy</b>		0.2 % FS (Full Scale)	
<b>Turbidity compensation</b>		at 530 nm	
<b>Data logger</b>		~ 2 MB	
<b>T100 response time</b>		4 s	
<b>Measurement interval</b>		≥ 2 s	
<b>Housing material</b>		Stainless steel (1.4571/1.4404) or titanium (3.7035)	
<b>Dimensions (L x Ø)</b>		300 mm x 48 mm (bei 10 mm Pfad)	~ 11.8" x 1.9" (with 10 mm path)
<b>Weight</b>	stainless steel	~ 2.3 kg (with 10 mm path)	~ 5.1 lbs (with 10 mm path)
	titanium	~ 2.1 kg (with 10 mm path)	~ 4.6 lbs (with 10 mm path)
<b>Interface</b>	digital	Ethernet (TCP/IP) RS-232 or RS-485 (Modbus RTU)	
	analog	Ethernet (TCP/IP) 4...20 mA	
<b>Power consumption</b>		≤ 1 W	
<b>Power supply</b>		12...24 VDC (± 10 %)	
<b>Maintenance effort</b>		≤ 0,5 h/month (typical)	
<b>Calibration/maintenance interval</b>		24 months	
<b>System compatibility</b>		Modbus RTU or: Analog Out (4...20 mA)	
<b>Warranty</b>		1 Jahr (EU: 2 years)	US: 2 years
<b>INSTALLATION</b>			
<b>Max. pressure</b>	with SubConn	30 bar	~ 435 psig
	with fixed cable	3 bar	~ 43.5 psig
	in FlowCell	1 bar, 2...4 L/min	~ 14.5 psig at 0.5 to 1.0 gpm
<b>Protection type</b>		IP68	NEMA 6P
<b>Sample temperature</b>		+2...+40 °C	~ +36 °F to +104 °F
<b>Ambient temperature</b>		+2...+40 °C	~ +36 °F to +104 °F
<b>Storage temperature</b>		-20...+80 °C	~ -4 °F to +176 °F
<b>Inflow velocity</b>		0.1...10 m/s	~ 0.33 fps to 33 fps

## VIPER

17SXXXXX0



VIPER measures spectrally resolved attenuation in the wavelength range between 360 nm and 720 nm and thus allows the detailed determination of several parameters at the same time. 5 selected and energy-saving LEDs serve as the light source, ensuring stable measurement data and a long service life. VIPER can be used in a wide variety of media, as it is available in several path lengths and in both stainless steel and titanium. Applications for VIPER include water monitoring, colour measurement of aqueous solutions or quality monitoring of

drinking water. Like every TriOS sensor, VIPER is equipped with nano-coated optical windows to prevent dirt build-up. Additional parameters can be installed later using software, if necessary. VIPER is equipped with the new TriOS G2 interface, allowing easy and fast sensor configuration via a web browser. Integration into existing process control systems and external data loggers has never been easier.

**NEW!** The TriOS compressed air flushing is now also available for the paths 100 mm, 150 mm and 250 mm!

### Advantages

- without sampling and sample preparation
- without delay
- without reagents
- optical windows with nanocoating
- LED technology

### Applications

- Drinking water monitoring
- Environmental monitoring
- Colour measurement
- Quality assurance
- Petrochemistry
- Industry
- Food industry




## Technical specifications

<b>Measurement technology</b>	light source	5 LED	
	detector	High-end miniature spectrometer, 256 channels 360 to 750 nm, 2.2 nm/pixel	
<b>Measurement principle</b>		Attenuation	
<b>Optical path</b>		10 mm, 50 mm, 100 mm, 150 mm, 250 mm	
<b>Parameter</b>		SAC <sub>436</sub> Pt-Co color scale (APHA/Hazen) (390 nm, 455 nm) Colouring based on DIN EN ISO 7887-C (410 nm, 436 nm, 525 nm, 620 nm) Cr-Co color scale (380 nm, 413 nm)	
<b>Measuring range</b>		0.01...2.5 AU (absorption units)	
<b>Measurement accuracy</b>		< 0.2 %	
<b>Turbidity compensation</b>		Yes	
<b>Data logger</b>		~ 2 GB	
<b>T100 response time</b>		2 min	
<b>Measurement interval</b>		≥ 1 min	
<b>Housing material</b>		Stainless steel (1.4571/1.4404) or titanium (3.7035)	
<b>Dimensions (L x Ø)</b>		495 mm x 48 mm (with 50 mm path) ~ 19.5" x 1.9" (with 50 mm path)	
<b>Weight</b>	stainless steel	~ 2.4 kg (with 50 mm path)	~ 5.3 lbs (with 50 mm path)
	titanium	~ 1.3 kg (with 50 mm path)	~ 2.9 lbs (with 50 mm path)
<b>Interface</b>	digital	Ethernet (TCP/IP)	
		RS-232 or RS-485 (Modbus RTU)	
<b>Power consumption</b>		≤ 3 W	
<b>Power supply</b>		12...24 VDC (± 10 %)	
<b>Maintenance effort</b>		≤ 0.5 h/month (typical)	
<b>Calibration/maintenance interval</b>		24 months	
<b>System compatibility</b>		Modbus RTU	
<b>Warranty</b>		1 year (EU: 2 years)	US: 2 years
<b>Max. pressure</b>	with SubConn	30 bar	~ 435 psig
	with fixed cable	3 bar	~ 43.5 psig
	in FlowCell	1 bar, 2...4 L/min	~ 14.5 psig, 0.5 to 1.0 gpm
<b>Protection type</b>		IP68	NEMA 6P
<b>Sample temperature</b>		+2...+40 °C	~ +36 °F to +104 °F
<b>Ambient temperature</b>		+2...+40 °C	~ +36 °F to +104 °F
<b>Storage temperature</b>		-20...+80 °C	~ -4 °F to +176 °F
<b>Inflow velocity</b>		0.1...10 m/s	~ 0.33 fps to 33 fps



## Colour Measurement

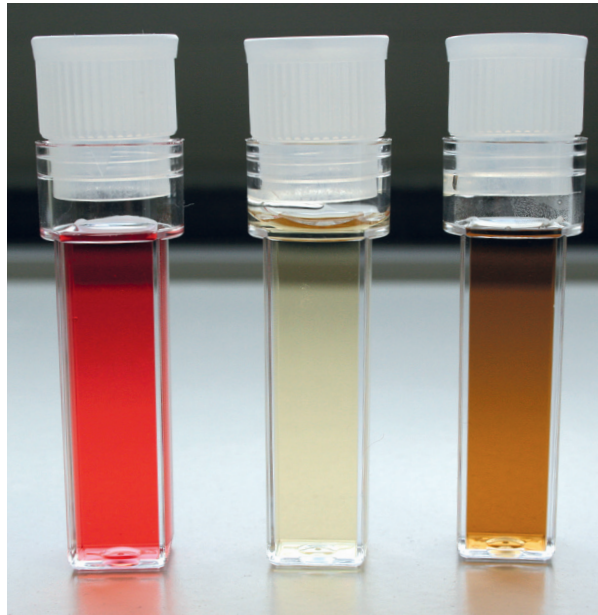

VIPER is an in-situ VIS spectrophotometer to determine the colour of liquids. In addition to the hyperspectral recording of spectra (2.2 nm/pixel), various colour numbers can be determined. This enables standardized, safe and objective measurements. Time-consuming and expensive sampling is eliminated by in-situ measurements. What's more, variations over a whole day can be recorded.

### $SAC_{436}$ (DIN EN ISO 7887: 2012-04)

Spectral absorption coefficients at 436 nm are designated  $SAC_{436}$ . It represents the light attenuation of an aqueous sample with a layer thickness of 1 m and a wavelength of 436 nm. The yellow to brown colour ranges that occur in coloured water have the highest light attenuation at 436 nm, which is why for example the colouring is determined according to drinking water regulations at this wavelength.

VIPER compensates for any turbidity when determining  $SAC_{436}$ .

Depending on the customer's request, SACs in the entire wavelength range (such as  $SAC_{525}$ ,  $SAC_{620}$ ) can be determined, or individual opacity adjustments can be made.



### Pt-Co colour scale (Hazen/APHA)

(DIN EN ISO 6271:2016-05)

The Pt-Co colour number records the range from colourless (<1) to light yellow to orange (500). The colour number is defined via a standard solution of hexachloroplatinate in acidic salt water and specified in mg/L Pt.

The Pt-Co colour number is calculated using the turbidity corrected attenuation at 455 nm or 390 nm.

# Colour Measurement // PHOTOMETER

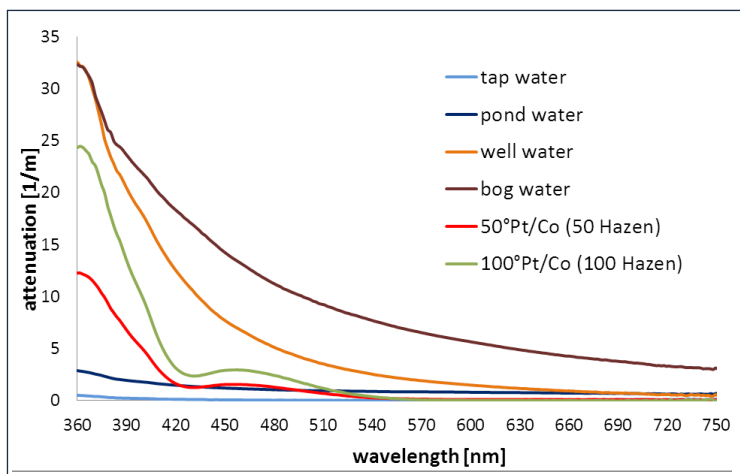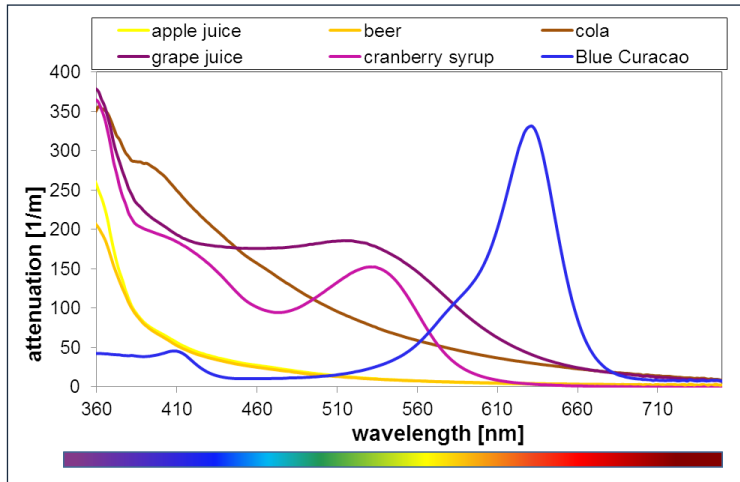

## Colouring

VIPER enables hyperspectral measurements of the colour of each liquid.

This also allows the differentiation of colours that are perceived immediately, but consist of different colour mixes.

The diagram on the left shows examples from the beverage industry.

## VIPER: Attenuation spectrum

Subsequent calculation of colour numbers is also possible thanks to the storage of spectra. VIPER therefore enables several colour numbers to be simultaneously calculated from a spectrum. In addition to the above colour numbers, the device can determine the Cr-Co colour number (Russian grade) in accordance with GOST 3351-74, which is interesting for the Russian market. Please contact us for any special applications. We will be happy to help.

## LISA color

5XSXXXXX0



Colorimetry – LISA enables reliable low-cost colour measurements. The LISA color uses two different LEDs for long-term stable measurement of the SAC or color at different wavelengths. The second channel is used for turbidity/background correction. The cutting-edge device platform, used in all other TriOS photometers, enables optical path lengths of 50, 100, 150, and 250 mm, so that almost any application can be easily implemented.

With the optional titanium housing, the LISA color can also be used for applications in aggressive media (e.g. high chloride concentrations).

Equipped with our innovative G2 interface with a web browser configuration, internal data logger, flexible protocols and data outputs, the LISA color possesses equipment attributes that are significantly greater than the devices currently available on the market

The unified platform of all TriOS photometers also facilitates a standardized spare parts and consumables system, which means the broad range of our device accessories can be implemented. The cutting-edge G2 interface also enables quick integration into third-party systems.

**NEW!** The TriOS pressure cleaning is now available for the path lengths 100 mm, 150 mm and 250 mm!

### Benefits

- Low investment
- Low maintenance (nano coating, air blast cleaning)
- Simple integration into third-party systems
- Robust housing

### Applications

- Environmental monitoring
- Drinking water monitoring
- Industrial applications



## Technical Specifications

<b>Measurement technology</b>	Light source	2 LEDs	
	Detector	Photodiode	
<b>Measurement principle</b>	Attenuation, transmission		
<b>Optical path</b>	50 mm, 100 mm, 150 mm, 250 mm		
<b>Parameters</b>	SAC <sub>436</sub> , SAC <sub>525</sub> , SAC <sub>620</sub>		
	Color (based on DIN EN ISO 7887 (410 nm, 436nm, 525 nm, 620 nm))		
	Pt-Co color number (APHA/Hazen) (390 nm or 455 nm)		
	Cr-Co color number (380 nm or 413 nm)		
<b>Measurement range</b>	See parameter list p.26		
<b>Measurement accuracy</b>	0.5 %		
<b>Turbidity compensation</b>	yes, 740 nm		
<b>Data logger</b>	~ 2 MB		
<b>Reaction time T100</b>	4 s		
<b>Measurement interval</b>	≥ 2 s		
<b>Housing material</b>	Stainless steel (1.4571/1.4404) or titanium (3.7035)		
<b>Dimensions (L x Ø)</b>	340 mm x 48 mm (for 50-mm path)		~ 13.4" x 1.9" (for 50-mm path)
<b>Weight</b>	stainless steel	~ 2.4 kg (for 50-mm path)	~ 5.3 lbs (for 50-mm path)
	titanium	~ 1.3 kg (for 50-mm path)	~ 2.9 lbs (for 50-mm path)
<b>Interface</b>	digital	Ethernet (TCP/IP)	
		RS-232 or RS-485 (Modbus RTU)	
	analog	Ethernet (TCP/IP)	
		4...20 mA	
<b>Power consumption</b>	≤ 1 W		
<b>Power supply</b>	12...24 VDC (± 10 %)		
<b>Required supervision</b>	typically ≤ 0,5 hours per month		
<b>Calibration/maintenance interval</b>	24 months		
<b>System compatibility</b>	Modbus RTU		
	Analog out (4...20 mA)		
<b>Warranty</b>	1 year (EU & US: 2 years)		
<b>Max. pressure</b>	with Subconn	30 bars	~ 435 psig
	with fixed cable	3 bars	~ 43.5 psig
	in FlowCell	1 bar, 2...4 L/min	~ 14.5 psig, 0.5 to 1 gpm
<b>Protection type</b>	IP68		NEMA 6P
<b>Sample temperature</b>	+2...+40 °C		~ +36 °F to +104 °F
<b>Ambient temperature</b>	+2...+40 °C		~ +36 °F to +104 °F
<b>Storage temperature</b>	-20...+80 °C		~ -4 °F to +176 °F
<b>Inflow velocity</b>	0.1...10 m/s		~ 0.33 fps to 33 fps



# PHOTOMETER // LISA color

## Measurement range

Parameters	Unit	Measurement range			
		50 mm	100 mm	150 mm	250 mm
SAC 436 nm	1/m	0.1...30	0.05...15	0.03...10	0.02...6
SAC 525 nm	1/m	0.1...30	0.05...15	0.03...10	0.02...6
SAC 620 nm	1/m	0.1...30	0.05...15	0.03...10	0.02...6
True color 410 nm	mg/L Pt	2...560	1...280	0.6...185	0.4...110
Hazen 390 nm	mg/L Pt	0.8...220	0.4...110	0.3...75	0.2...45
Hazen 455 nm	mg/L Pt	4...1100	2...550	1.5...360	0.8...220
Cr-Co 380 nm	° (degree of color)	1...300	0.5...150	0.3...100	0.2...60
Cr-Co 413 nm	° (degree of color)	4...1100	2...550	1.5...360	0.8...220











FLUOROMETER



## enviroFlu

30SXXXXX0



### PAH, oil-in-water by means of UV fluorescence

enviroFlu-HC is a new generation of immersion probes for measuring oil-in-water. The measuring principle of UV fluorescence used is far more sensitive than the conventionally used infrared scattering or absorption methods. This makes it possible to determine even the smallest traces of PAHs, e.g. in drinking water, but also in cooling water condensates. The field of application ranges from petrochemistry, leakage detection in cooling and

waste water streams to environmental monitoring. The devices can be used stationary in manholes, in the flow or in pipelines, as well as portable, using an optional hand-held measuring device. A new type of coating reduces soiling of the optical measuring windows and thus reduces the required maintenance to a minimum.

#### Advantages

- without sampling and sample preparation
- without delay
- without reagents
- high sensitivity and selectivity
- optical windows with nanocoating

#### Areas of application

- Drinking water
- Waste water
- Airports
- Cooling water
- Desalination plants
- Refineries
- Pipeline monitoring
- Bilge water monitoring
- Flue gas scrubbing with ship approval according to MEPC.259(68)

**NEW! enviroFlu HC MB incl. Modbus interface!**

	Interface	Data protocol	Variants	Measuring range
enviroFlu HC	Digital: RS-232 Analog: 4...20 mA / 0...5 VDC	TriOS Data protocol	HC 500	0...500 ppb
			HC 5000	0...5000 ppb
enviroFlu HC MB	Digital: RS-485	Modbus RTU	HC MB 500	0...500 ppb
			HC MB 5000	0...5000 ppb
enviroFlu BT	Digital: RS-232 Analog: 4...20 mA / 0...5 VDC	TriOS Data protocol	BT	0...10 000 ppb


## Technical specifications

<b>Measurement technology</b>	Light source	Xenon flash lamp + filter (254 nm)	
	Detector	Photodiode + filter (360 nm)	
<b>Measurement principle</b>		Fluorescence	
<b>Parameters</b>		PAH, oil	
<b>Measurement range</b>	enviroFlu HC (MB) 500	PAH: 0...50 ppb, 0...500 ppb, Oil: 0...1.5 ppm, 0...15 ppm typ.	
	enviroFlu HC (MB) 5000	PAH: 0...500 ppb, 0...5000 ppb Oil: 0...15 ppm, 0...150 ppm typ.	
	enviroFlu BT	0...1000 ppb, 0...10 000 ppb	
<b>Detection limit</b>		enviroFlu HC (MB) 500 0.3 ppb enviroFlu HC (MB) 5000 0.5 ppb	
<b>Measurement accuracy</b>		± 5 % FS*	
<b>Reproducibility</b>		≤ 0.5 % FS*	
<b>Turbidity compensation</b>		No (only possible via TTurb on the TriBox3)	
<b>Data logger</b>		no	
<b>Reaction time T100</b>		≤ 10 s	
<b>Measurement interval</b>		≥ 5 s	
<b>Interface</b>	enviroFlu HC	Digital: RS-232 (TriOS Protocol) Analog: 4...20 mA, 0...5 V	
	enviroFlu HC MB	Digital: RS-485 (Modbus RTU) Analog: nicht vorhanden	
	enviroFlu BT	Digital: RS-232 (TriOS Protocol) Analog: 4...20 mA, 0...5 V	
<b>Power consumption</b>		≤ 3.5 W	
<b>Power supply</b>		12...24 VDC (± 10 %)	
<b>Required supervision</b>		Typically ≤ 0.5 h/month	
<b>Calibration/maintenance interval</b>		24 months, the manufacturer calibration can be increased to 4-5 years when used with associated DryCAL-Set	
<b>System compatibility</b>		analog out (0...5 VDC, 4...20 mA)	
<b>Warranty</b>		1 year (EU: 2 years)	US: 2 years
<b>Material</b>	Housing	Stainless steel (1.4571/1.4404) or titanium (3.7035) DeepSea version: titanium (3.7035)	
	Measuring head	black POM with synthetic quartz glass DeepSea version: Cover titanium, pressure ring POM Acid-resistant version: PPS	
<b>Dimensions (L x Ø)</b>		311 mm x 68 mm DeepSea version: 314 x 78 mm	~12.2" x 2.6" Deep sea version: ~ 12.4" x 3.1"
<b>Weight</b>	stainless steel	~ 2.7 kg	~ 6 lbs
	titanium	~ 1.9 kg DeepSea version: ~ 3.9 kg	~ 4.2 lbs DeepSea version: ~ 8.6 lbs

# FLUOROMETER // enviroFlu

<b>Max. pressure</b>	with SubConn	30 bars	~ 435 psig
	with fixed cable	3 bar	~ 43.5 psig
	in FlowCell	1 bar, 2...4 L/min	~ 14.5 psig, 0.5 to 1 gpm
	Deepsea version	600 bar	~ 8702.2 psig
<b>Protection type</b>		IP68	NEMA 6P
<b>Sample temperature</b>		+2...+40 °C	~ +36 °F to +104 °F
<b>Ambient temperature</b>		-5...+55 °C (2...+40 °C for specified accuracy)	~ +23 °F to +131 °F (~ 32 °F to 104 °F for specified accuracy)
<b>Storage temperature</b>		-20...+80 °C	~ -4 °F to +176 °F
<b>Inflow velocity</b>		0.1...10 m/s	~ 0.33 fps to 33 fps
<b>Max. immersion depth</b>		300 m with SubConn 8-pin underwater connector	~ 984 ft with SubConn 8-pin underwater connector
		30 m with fixed cable optional: 6000 m Deepsea version	~ 98.4 ft with fixed cable optional: ~ 19685.04 ft Deepsea version


\* FS: Full Scale  $\triangle$  Measurement Range




Naphthalene




Acenaphthylene




Acenaphthene




Fluorene




Phenanthrene




Anthracene




Fluoranthene




Pyrene




Benzo[a]anthracene




Crysene




Benzo[b]fluoranthene




Benzo(k)fluoranthene




Benzo[a]pyrene



Dibenzo(a,h)anthracene



Ideno(1,2,3-c,d)pyrene



Benzo(g,h,i)perylene





## nanoFlu

32SXXXXX0



### Miniature fluorometer

nanoFlu fluorometers are low-priced, submersible miniaturized fluorometers for the highly precise, selective measurement of cdom (coloured dissolved organic matter, yellow substances), chlorophyll a, phycocyanin in cyanobacteria, rhodamine or fluorescein. Long-term stability of measurements is ensured by the combination of low power consumption and innovative coating of the optical window, as an energy efficient and environmentally friendly antifouling solution. The devices can be used in diverse applications for the monitoring of sea and river waters,

as well as in drinking and wastewater treatment systems. Internal reference signals of the high performance LEDs used for fluorescence excitation compensate ageing effects and temperature influences.

The nanoFlu features the new TriOS G2 interface, allowing fast and easy configuration of sensors by using a web browser. Integration into existing process control systems and external data loggers has never been easier.

### Benefits

- High sensitivity
- Nano-coating
- Fast data acquisition
- Electronic light compensation
- Compact size
- Low power consumption
- Low costs

### Applications

- Surface water
- Bathing lakes
- Drinking water production and treatment
- Raw water treatment
- Environmental monitoring

### Accessories

- FlowCell
- SolidCAL

### Parameter list

<b>Parameters</b>	cdom [ $\mu\text{g/L}$ ] with 0...200 $\mu\text{g/L}$
	or chlorophyll a [ $\mu\text{g/L}$ ] with 0...200 $\mu\text{g/L}$ or 0...500 $\mu\text{g/L}$
	or phycocyanin [ $\mu\text{g/L}$ ] with 0...200 $\mu\text{g/L}$ or 0...500 $\mu\text{g/L}$
	or rhodamine [ $\mu\text{g/L}$ ] with 0...200 $\mu\text{g/L}$
	or fluorescein [ $\mu\text{g/L}$ ] with 0...200 $\mu\text{g/L}$

## Technical Specifications

<b>Measurement technology</b>	Light source	LED
	Detector	Photodiode
<b>Measurement principle</b>		Fluorescence
<b>Parameters</b>		See parameter list
<b>Measurement range</b>		0...200 µg/L or 0...500 µg/L
<b>Measurement accuracy</b>		± 5 %
<b>Turbidity compensation</b>		no
<b>Data logger</b>		no
<b>Reaction time T100</b>		6 s
<b>Measurement interval</b>		3 s
<b>Housing material</b>		Stainless steel (1.4571/1.4404) or titanium (3.7035) or POM
<b>Dimensions (L x Ø)</b>		171 mm x 36 mm
<b>Weight</b>	stainless steel	0.5 kg
	titanium	0.4 kg
	POM	0.27 kg
<b>Interface</b>	digital	Ethernet (TCP/IP)
		RS-232 or RS-485 (Modbus RTU)
<b>Power consumption</b>	typical	< 1 W
	with network	< 1.6 W
<b>Power supply</b>		12...24 VDC (± 10 %)
<b>Required supervision</b>		typically ≤ 0,5 hours per month
<b>Calibration/maintenance interval</b>		24 months
<b>System compatibility</b>		Modbus RTU
<b>Warranty</b>		1 year (EU & US: 2 years)
<b>INSTALLATION</b>		
<b>Max. pressure</b>	with SubConn	30 bars
	with fixed cable	3 bars
	in FlowCell	1 bar, 2...4 L/min
<b>Protection type</b>		IP68
<b>Sample temperature</b>		+2...+40 °C
<b>Ambient temperature</b>		+2...+40 °C
<b>Storage temperature</b>		-20...+80 °C
<b>Inflow velocity</b>		max. 10 m/s

## matrixFlu VIS

34S10XXXX



Our high-end matrixFlu VIS fluorometer combines multiple excitation and detection wavelengths for fluorescence measurements in a single device with a highly compact design. The special optical arrangement of excitation and detection channels enables not only single values to be determined, but also a 4x4 matrix of wavelength combinations. This allows quasi synchronous in-situ detection of EEMs (Excitation Emission Matrices).

MatrixFlu VIS is primarily designed for the online detection of algae (cyanobacteria, green algae, etc.) and is expanded by the detection of cdom.

State-of-the-art, specially selected LEDs are used for fluorescence excitation. The stability of mea-

sured values is increased by an internal temperature correction.

Equipped with our innovative G2 interface with web browser configuration, internal data logger, flexible protocols and data outputs, matrixFlu offers extensive features that go significantly beyond what's available on the market today.


The unified platform of all TriOS photometers also facilitates a standardized spare parts and consumables system, which allows the use of a wide range of accessories for our devices. Furthermore the cutting-edge G2 interface enables quick integration into third-party systems.

### Benefits

- Without sampling and preparation of test samples
- Real-time sensor
- Without reagents
- Optical window with nano coating

### Applications

- Surface water
- Bathing lakes
- Drinking water production and treatment
- Raw water treatment
- Environmental monitoring

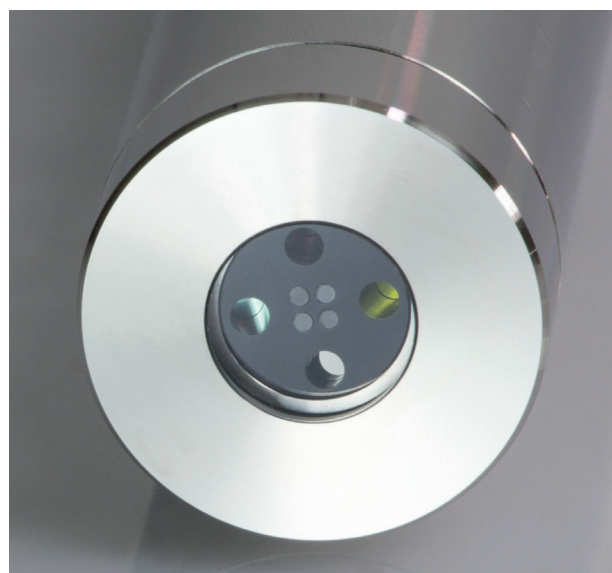

Detail of design for 4x4 wavelengths



The development was part of the NEXOS project and was funded by the European Union.

Ex	Em			
	460	682	655	850
375	cdom 1	cdom 3	cdom 2	XX3
470	scat 460	chl-a	XX2	XX4
590	XX1	blue2	blue1	XX5

## Technical Specifications

<b>Measurement technology</b>	light source	3 LED (375 nm/470 nm/590 nm)	
	detector	4 photo diodes with filter	
<b>Measurement principle</b>		Fluorescence	
<b>Parameter</b>	Chlorophyll a [ $\mu\text{g/L}$ ]		
	Phycocyanin [ $\mu\text{g/L}$ ]		
	cdom [ $\mu\text{g/L}$ ]		
<b>Measuring range</b>		0...200 $\mu\text{g/L}$	0...200 ppb
<b>Measurement accuracy</b>		5 %	
<b>Turbidity compensation</b>		Yes	
<b>Data logger</b>		~ 10 MB	
<b>T100 response time</b>		12 s	
<b>Measurement interval</b>		6 s	
<b>Housing material</b>		Stainless steel (1.4571/1.4404) or titanium (3.7035)	
<b>Dimensions (L x Ø)</b>		155 mm x 36 mm	~ 6.1" x 1.4"
<b>Weight</b>	stainless steel	~ 0.6 kg	~ 1.3 lbs
	titanium	~ 0.5 kg	~ 1.1 lbs
<b>Interface</b>	digital	Ethernet (TCP/IP)	
		RS-232 oder RS-485 (Modbus RTU, OGC PUCK)	
<b>Power consumption</b>		$\leq 1.8 \text{ W}$	
<b>Power supply</b>		12...24 VDC ( $\pm 10 \%$ )	
<b>Maintenance effort</b>		$\leq 0.5 \text{ h/month}$ (typical)	
<b>Calibration/maintenance interval</b>		24 months	
<b>System compatibility</b>		Modbus RTU, OGC PUCK	
<b>Warranty</b>		1 year (EU: 2 years)	US: 2 years
<b>INSTALLATION</b>			
<b>Max. pressure</b>	with SubConn	30 bar	~ 435 psig
	with fixed cable	3 bar	~ 43.5 psig
<b>Protection type</b>		IP68	NEMA 6P
<b>Sample temperature</b>		+2...+40 °C	~ +36 °F to +104 °F
<b>Ambient temperature</b>		+2...+40 °C	~ +36 °F to +104 °F
<b>Storage temperature</b>		-20...+80 °C	~ -4 °F to +176 °F
<b>Inflow velocity</b>		0.1...5 m/s	~ 0.33 fps to 16.4 fps

## microFlu V2

37SX0XX1X



microFlu V2 fluorometers are submersible miniature fluorometers for highly precise and selective measurement of tryptophan, cdom, blue-green algae or chlorophyll. The combination of low power consumption and innovative coating of the measurement windows as an energy and environmentally neutral antifouling solution ensures long-term stability of the measurements. The instruments can be used in a wide range of applications for monitoring seawater, river water, drinking water and wastewater. Internal reference measurements of the high-power LED used for fluorescence excitation compensate for aging effects and temperature influences. microFlu V2 is equipped with a RS-485 interface, which enables easy and fast sensor configuration via Modbus. Integration into existing process control systems and external data loggers has never been easier.

### Advantages

- without sampling and sample preparation
- without delay
- without reagents
- high sensitivity and selectivity
- optical windows with nanocoating
- electronic daylight compensation
- handy size

### Applications

- Surface waters
- Bathing lakes
- Drinking water treatment
- Raw water treatment
- Environmental monitoring

Sensor Version	Parameter	Ex / Em	Measuring range	Detection limit
chl	Chlorophyll	470 nm / 685 nm	0 – 200 ppb	0.05 ppb
chl	Chlorophyll	470 nm / 685 nm	0 – 500 ppb	1 ppb
blue	Cyanobacteria	620 nm / 655 nm	0 – 200 ppb	0.5 ppb
blue	Cyanobacteria	620 nm / 655 nm	0 – 500 ppb	2 ppb
cdom	cdom (coloured dissolved organic mater)	375 nm / 460 nm	0 – 500 ppb	0.25 ppb
TRP	Tryptophan	275 nm / 360 nm	0 – 500 ppb	3 ppb



## Technical specifications

<b>Measurement technology</b>	Light source	LED + Filter	
	Detector	Photodiode + Filter	
<b>Measurement principle</b>		Fluorescence	
<b>Parameters</b>		Chlorophyll a [ $\mu\text{g/L}$ ]	
		Phycocyanin [ $\mu\text{g/L}$ ]	
		cdom [ $\mu\text{g/L}$ ]	
		Tryptophan [ $\mu\text{g/L}$ ]	
<b>Measurement range</b>		See parameter list	
<b>Detection limits</b>		See parameter list	
<b>Measurement accuracy</b>		+/- (5 % + Detection limit)	
<b>Turbidity compensation</b>		No	
<b>Data logger</b>		No	
<b>Reaction time T90</b>		6 s (default)	
<b>Smallest measuring interval</b>		3 s (default)	
<b>Interface</b>	digital	RS-485, Modbus RTU	
	analog	4...20 mA (default)	
		0 – 5 V	
<b>Power consumption</b>	typical	max. 0.6 W	
	with activated analog interface	max. 1.1 W	
	Power-Down	max. 70 mW	
<b>Power supply</b>		12 – 24 VDC ( $\pm 10\%$ )	
<b>Required supervision</b>		$\leq 0.5$ h/month typical	
<b>Calibration/maintenance interval</b>		24 months	
<b>Warranty</b>		1 year (EU & USA 2 years)	
<b>Housing material</b>		Stainless steel (1.4571/1.4404) or titanium (3.7035)	
<b>Dimensions (L x Ø)</b>		~ 162 mm x 48 mm	~ 6.4" x 1.9"
<b>Weight</b>	VA	~ 650 g	~ 1.4 lbs
	TI	~ 510 g	~ 1.1 lbs
<b>Max. pressure</b>	with SubConn	30 bar	~ 435 psig
	with fixed cable	3 bar	~ 43.5 psig
	in FlowCell	1 bar, 2...4 L/min	~ 14.5 psig, 0.5 to 1 gpm
<b>Protection type</b>		IP68	NEMA 6P
<b>Sample temperature</b>		+ 2...+ 40 °C	~ +36 °F to +104 °F
<b>Ambient temperature</b>		+ 2...+ 40 °C	~ +36 °F to +104 °F
<b>Storage temperature</b>		- 20...+ 80 °C	~ -4 °F to +176 °F
<b>Inflow velocity</b>		0.1...10 m/s	~ 0.33 fps to 33 fps

## microFlu V2 HC

37S80XX13



microFlu V2 HC is a new immersion probe for measuring oil in water. The measuring principle of UV fluorescence used is many times more sensitive and specific than the conventionally used infrared scattering or absorption methods. This makes it possible to determine even the smallest traces of PAHs, e.g. in drinking water, but also in cooling water condensates. The field of application ranges from petrochemistry, leakage detection in cooling and waste water streams to environmental monitoring. The instruments can be used stationary in manholes or in flow-through, as well as in pipelines. A nano-coating reduces the contamination of the optical measuring windows and thus reduces the required maintenance to a minimum.

microFlu V2 HC is equipped with an RS-485 interface that allows easy and fast sensor configuration via Modbus and also has an analog interface. Integration with existing process control systems and external data loggers has never been easier.

### Advantages

- without sampling and sample preparation
- without delay
- without reagents
- high sensitivity and selectivity
- optical windows with nano-coating

### Applications

- Surface waters
- Drinking water
- Waste water
- Airports
- Cooling water
- Desalination plants
- Refineries / Gas stations
- Seepage ditch (road run-off water)
- Pipeline monitoring
- Bilge water monitoring

### Technical specifications

<b>Measurement technology</b>	Light source	LED 255 nm
	Detector	Photodiode + Filter (360 nm)
<b>Measurement principle</b>		Fluorescence
<b>Parameters</b>		PAH, Oil

# microFlu V2 HC // FLUOROMETER

<b>Measurement range</b>	PAH: 0...5000 ppb	
	Oil: 0...150 ppm typ.	
<b>Detection limits</b>	PAH: 5 ppb	
	Oil: 0.15 ppm typ.	
<b>Measurement accuracy</b>	±10 % FS	
<b>Turbidity compensation</b>	No	
<b>Data logger</b>	No	
<b>Reaction time T90</b>	6 s	
<b>Smallest measuring interval</b>	3 s	
<b>Interface</b>	digital	RS-485, Modbus RTU
	analog	4...20 mA (default) 0 – 5 V 0 – 10 V
<b>Power consumption</b>	typical	max. 0.6 W
	with activated analog interface	max. 1.1 W
	Power-Down	max. 70 mW
<b>Power supply</b>	12 – 24 VDC (± 10 %)	
<b>Required supervision</b>	≤ 0.5 h/month typical	
<b>Calibration/maintenance interval</b>	24 months	
<b>Warranty</b>	1 year (EU & USA 2 years)	
<b>Housing material</b>	1 year (EU & USA 2 years)	
<b>Dimensions (L x Ø)</b>	ca. 162 mm x 48 mm	~ 6.4" x 1.9"
<b>Weight</b>	VA	~ 650 g ~ 1.4 lbs
	TI	~ 510 g ~ 1.1 lbs
<b>Max. pressure</b>	with SubConn	30 bar ~ 435 psig
	with fixed cable	3 bar ~ 43.5 psig
	in FlowCell	1 bar, 2...4 L/min ~ 14.5 psig, 0.5 to 1 gpm
<b>Protection type</b>	IP68	NEMA 6P
<b>Sample temperature</b>	+ 2...+ 40 °C	~ +36 °F to +104 °F
<b>Ambient temperature</b>	+ 2...+ 40 °C	~ +36 °F to +104 °F
<b>Storage temperature</b>	- 20...+ 80 °C	~ -4 °F to +176 °F
<b>Inflow velocity</b>	0.1...10 m/s	~ 0.33 fps to 33 fps



RADIOMETER



## RAMSES

40SXXX010



Spectral imaging radiometer to measure radiance or irradiance in UV, VIS and UV/VIS

RAMSES radiometers are spectral imaging radiometers to measure radiance, irradiance, or scalar irradiance in the UV, VIS and UV/VIS ranges. Thanks to their ultra small size and weight as well as very low power consumption, they are especially suitable for hand-held and autonomous applications. RAMSES radiometers combine precision hyperspectral light measurements with a maximum of flexibility. The modular system increases cost-effectiveness, while the many accessories and special solutions enable a wide range of applications such as installation on ships, handheld usage or autonomous measurements in remote places, like the Arctic or Antarctica.

### Benefits

- Extremely low power consumption
- Environmentally robust
- World market leader

### Applications


- Water quality
- Field measurements
- Satellite validation
- Biology
- Photosynthesis
- Color measurements
- Climate research



Frame 1



Frame 2

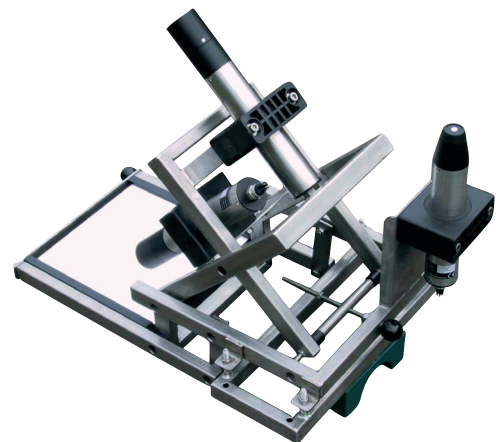

Frame 3

## Technical Specifications

<b>Measurement technology</b>	Detector	High-end miniature spectrometer	
<b>Measurement Principle</b>		256 Channels	
<b>Parameter</b>		Radiance or irradiance	
<b>Measuring range</b>		See parameter list p.46	
<b>Measurement accuracy</b>		See parameter list p.46	
<b>T100 response time</b>		≤ 10 s (burst mode)	
<b>Measurement interval</b>		≤ 8 s (burst mode)	
<b>Housing material</b>		Stainless Steel (1.4571 / 1.4404) or Titanium (3.7035), POM	
<b>Dimensions without IP Module, without SubConn Connector (L x Ø)</b>		ACC 260 mm x 48 mm	ACC ~ 10.2" x 1.9"
		ARC 300 mm x 48 mm	ARC ~ 11.8" x 1.9"
		ASC 245 mm x 48 mm	ASC ~ 9.6" x 1.9"
<b>Dimensions with IP Modul, without connector</b>		ACC 284 mm x 48.5 mm	ACC ~ 11.2" x 1.9"
		ARC 322 mm x 48.5 mm	ARC ~ 12.7" x 1.9"
<b>Weight</b>	Titanium	1.25 kg	~ 2.8 lbs
<b>Interface digital</b>		RS-232	
<b>Data logger</b>		-	
<b>Power consumption</b>		≤ 0.85 W	
<b>Power supply</b>		8...12 VDC (± 3 %)	
<b>Maintenance effort</b>		≤ 0,5 h/month (typically)	
<b>Calibration-/Maintenance Interval</b>		24 months	
<b>System compatibility</b>		RS-232 (TriOS Protocol)	
<b>Warranty</b>		1 Year (EU & USA : 2 Years)	
<b>Max. pressure</b>	with SubConn	30 bar	~435 psig
	DeepSea version	100 bar	~1450 psig
<b>Protection type</b>		IP68	NEMA 6P
<b>Sample temperature</b>		+2...+40 °C	~ +36...+104 °F
<b>Ambient temperature</b>		+2...+40 °C	~ +36...+104 °F
<b>Storage temperature</b>		-20...+80 °C	~ -4...+176 °F
<b>Inflow velocity</b>		0...10 m/s	~ 0...33 fps

# RADIOMETER // RAMSES

## RAMSES Parameter List

	ACC			ARC	ASC
					
	UV	UV/VIS	VIS	VIS	VIS
Wavelength range* [nm]	280...500	280...720	320...950	320...950	320...950
Detector*	256 Channel silicon photo diode array				
Pixel dispersion* [nm/ pixel]	2.2	2.2	3.3	3.3	3.3
Wavelength accuracy*	0.2	0.2	0.3	0.3	0.3
Usable channels	100	200	190	190	190

	ACC-UV		ACC-VIS		ARC-VIS	ASC-VIS
	UV A / UV B irradiance		VIS irradiance		VIS radiance	VIS scalar irradiance
Wavelength range*	280...500 nm				320...950 nm	
Type Saturation (IT: 4 ms)**	20 W m <sup>-2</sup> nm <sup>-1</sup> (at 300 nm) 17 W m <sup>-2</sup> nm <sup>-1</sup> (at 360 nm) 18 W m <sup>-2</sup> nm <sup>-1</sup> (at 500 nm)	10 W m <sup>-2</sup> nm <sup>-1</sup> (at 400 nm) 8 W m <sup>-2</sup> nm <sup>-1</sup> (at 500 nm) 14 W m <sup>-2</sup> nm <sup>-1</sup> (at 700 nm)	1 W m <sup>-2</sup> nm <sup>-1</sup> sr <sup>-1</sup> (at 500 nm)	20 W m <sup>-2</sup> nm <sup>-1</sup> (at 400 nm) 12 W m <sup>-2</sup> nm <sup>-1</sup> (at 500 nm) 15 W m <sup>-2</sup> nm <sup>-1</sup> (at 700 nm)		
Type NEI**** (IT: 8 s)	0.85 μW m <sup>-2</sup> nm <sup>-1</sup> (at 300 nm) 0.75 μW m <sup>-2</sup> nm <sup>-1</sup> (at 360 nm) 0.80 μW m <sup>-2</sup> nm <sup>-1</sup> (at 500 nm)	0.4 μW m <sup>-2</sup> nm <sup>-1</sup> (at 400 nm) 0.4 μW m <sup>-2</sup> nm <sup>-1</sup> (at 500 nm) 0.6 μW m <sup>-2</sup> nm <sup>-1</sup> (at 700 nm)	0.25 μW m <sup>-2</sup> nm <sup>-1</sup> sr <sup>-1</sup>	0.8 μW m <sup>-2</sup> nm <sup>-1</sup> (at 400 nm) 0.6 μW m <sup>-2</sup> nm <sup>-1</sup> (at 500 nm) 0.8 μW m <sup>-2</sup> nm <sup>-1</sup> (at 700 nm)		
Collector	Kosinus					
Accuracy	Better than 6...10% ***					
Integration time	4 ms...8 s					
	FOV: 7° in air		Better than 6% ***			
	Spherical, 2 Pi		Better than 5% ***			

\*) Specifications of Carl ZEISS AG, Germany

\*\*) Integration time

\*\*\*) Depends on wavelength range

\*\*\*\*) Noise-equivalent irradiance


## RAMSES G2 40SXXX010



Spectral imaging radiometer to measure radiance or irradiance in UV, VIS and UV/VIS

RAMSES radiometers are spectral imaging radiometers to measure radiance, irradiance, or scalar irradiance in the UV, VIS and UV/VIS ranges. Thanks to their ultra small size and weight as well as very low power consumption, they are especially suitable for hand-held and autonomous applications. RAMSES radiometers combine precision hyperspectral light measurements with a maximum of flexibility. The modular system increases cost-effectiveness, while many accessories and special solutions enable a wide range of applications such as installation on ships, handheld usage or autonomous measurements in remote places, like the Arctic or Antarctica.

By implementing the G2 extension module, the RAMSES radiometry series now also features the innovative G2 Interface and can now easily be configured by using a web-browser. The internal data logger with 2 GB storage and the comparably low power consumption provides the opportunity for a self-sufficient measurement operation without a separate controller. The addition of the Modbus RTU protocol to the interface simplifies the integration into existing PLCs and external data loggers. Additional to radiance and irradiance, the parameters inclination, pressure and temperature can be retrieved.

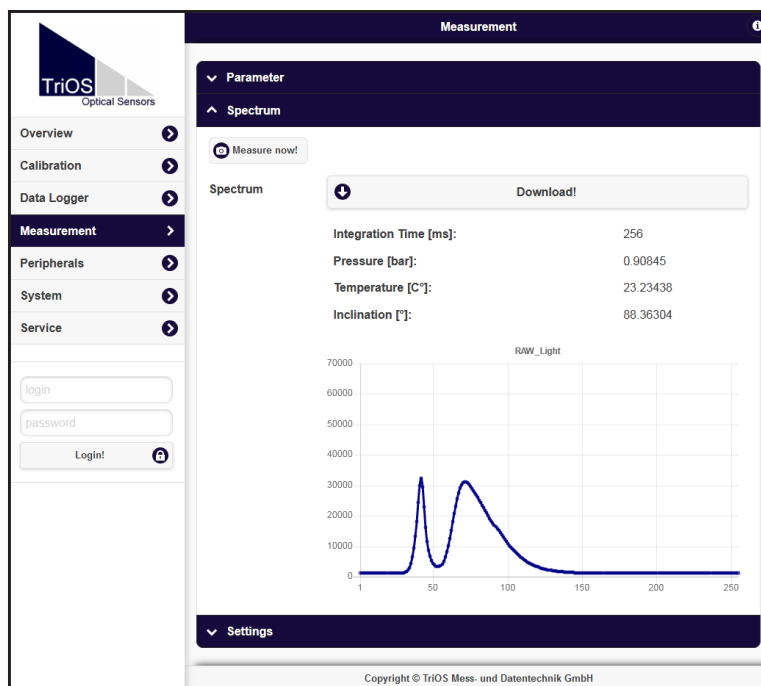

### Benefits

- Extremely low power consumption
- Environmentally robust
- World market leader

### Applications

- Water quality
- Field measurements
- Satellite validation
- Biology
- Photosynthesis
- Color measurements
- Climate research

# RADIOMETER // RAMSES G2

## Technical Specifications

<b>Measurement technology</b>	Detector	High-end miniature spectrometer	
<b>Measurement Principle</b>		256 Channels	
<b>Parameter</b>		Radiance or irradiance	
<b>Measuring range</b>		See parameter list	
<b>Measurement accuracy</b>		See parameter list	
<b>T100 response time</b>		≤ 24 s (burst mode)	
<b>Measurement interval</b>		≤ 12 s (burst mode)	
<b>Housing material</b>		Stainless Steel (1.4571 / 1.4404) or Titanium (3.7035), POM	
<b>Dimensions with IP Modul, without connector</b>		ACC 284 mm x 48.5 mm	ACC ~ 11.2" x 1.9"
		ARC 322 mm x 48.5 mm	ARC ~ 12.7" x 1.9"
<b>Weight</b>	Titanium	1.25 kg	~ 2.8 lbs
<b>Interface digital</b>		RS-485; Ethernet (TCP/IP)	
<b>Data logger</b>		~ 2 GB	
<b>Power consumption</b>		typically 1 W	
<b>Power supply</b>		9...24 VDC (± 10%)	
<b>Maintenance effort</b>		≤ 0,5 h/month (typically)	
<b>Calibration-/Maintenance Interval</b>		24 months	
<b>System compatibility</b>		RS-485 (Modbus RTU)	
<b>Warranty</b>		1 Year (EU & USA : 2 Years)	
<b>Max. pressure</b>	with SubConn	30 bar	~435 psig
	DeepSea version	100 bar	~1450 psig
<b>Protection type</b>		IP68	NEMA 6P
<b>Sample temperature</b>		+2...+40 °C	~ +36...+104 °F
<b>Ambient temperature</b>		+2...+40 °C	~ +36...+104 °F
<b>Storage temperature</b>		-20...+80 °C	~ -4...+176 °F
<b>Inflow velocity</b>		0...10 m/s	~ 0...33 fps



## RAMSES G2 Parameter List

	ACC		ARC		ASC	
	UV	UV/VIS	UV	VIS	UV	VIS
Wavelength range* [nm]	280...500	280...720	320...950	320...950	320...950	320...950
Detector*	256 Channel silicon photo diode array					
Pixel dispersion* [nm/pixel]	2.2	2.2	3.3	3.3	3.3	3.3
Wavelength accuracy*	0.2	0.2	0.3	0.3	0.3	0.3
Usable channels	100	200	190	190	190	190
ACC-UV      ACC-VIS      ARC-VIS      ASC-VIS						
	UVA / UV B irradiance	VIS irradiance		VIS radiance		VIS scalar irradiance
Wavelength range*	280...500 nm	320...950 nm		320...950 nm		
Type Saturation (IT: 4 ms)**	20 W m <sup>-2</sup> nm <sup>-1</sup> (at 300 nm)	10 W m <sup>-2</sup> nm <sup>-1</sup> (at 400 nm)		20 W m <sup>-2</sup> nm <sup>-1</sup> (at 400 nm)		
	17 W m <sup>-2</sup> nm <sup>-1</sup> (at 360 nm)	8 W m <sup>-2</sup> nm <sup>-1</sup> (at 500 nm)		12 W m <sup>-2</sup> nm <sup>-1</sup> (at 500 nm)		
	18 W m <sup>-2</sup> nm <sup>-1</sup> (at 500 nm)	14 W m <sup>-2</sup> nm <sup>-1</sup> (at 700 nm)		15 W m <sup>-2</sup> nm <sup>-1</sup> (at 700 nm)		
Type NEI**** (IT: 8 s)	0.85 μW m <sup>-2</sup> nm <sup>-1</sup> (at 300 nm)	0.4 μW m <sup>-2</sup> nm <sup>-1</sup> (at 400 nm)		0.8 μW m <sup>-2</sup> nm <sup>-1</sup> (at 400 nm)		
	0.75 μW m <sup>-2</sup> nm <sup>-1</sup> (at 360 nm)	0.4 μW m <sup>-2</sup> nm <sup>-1</sup> (at 500 nm)		0.6 μW m <sup>-2</sup> nm <sup>-1</sup> (at 500 nm)		
	0.80 μW m <sup>-2</sup> nm <sup>-1</sup> (at 500 nm)	0.6 μW m <sup>-2</sup> nm <sup>-1</sup> (at 700 nm)		0.8 μW m <sup>-2</sup> nm <sup>-1</sup> (at 700 nm)		
Collector	Kosinus					
Accuracy	Better than 6...10% ***					
Integration time	4 ms...8 s					

\*) Specifications of Carl ZEISS AG, Germany    \*\*) Integration time    \*\*\*) Depends on wavelength range    \*\*\*\*) Noise-equivalent irradiance



eCHEM

# pH Sensor Digital TpH

80S1000X0



Robust digital pH sensor for operation on TriBox controllers and HS100 DIN G2 rail module. Digital communication ensures safe and trouble-free signal transmission from the sensor to the controller. The high-quality gel pH electrode has a hole diaphragm and is insensitive to dirt, making the sensor ideal for wastewater applications.

## Benefits

- High-quality combination electrode with hole diaphragm and polymerised solid electrolyte
- Low maintenance
- Plug and play with TriBox controller

## Applications

- Water and wastewater treatment
- Coagulation and flocculation
- Process monitoring and control
- Acid/base neutralization systems

## Accessories

- Cable: Extension cables of 0.3 m, 2 m, 10 m, 25 m
- Controller: TriBox3, TriBox mini, HS100
- Fittings: FlowCell

## Technical Specifications

<b>Measurement technology</b>		pH electrode
<b>Measurement principle</b>		Potentiometry
<b>Parameter</b>		pH value, temperature
<b>measuring range</b>	pH	0...14 pH
	Temperature	0...+65 °C
<b>resolution</b>	pH	0.01 pH
	Temperature	0.1 °C
<b>precision</b>	pH	± 0,06 pH
	Temperature	± 0.5 °C
<b>Intrinsic error</b>	pH1	± 0.05 pH
	pH7	± 0.05 pH
	pH13	± 0.35 pH
<b>Linearity measurement error</b>		± 0.1 pH

The sensor complies with DIN EN 60746-2:2003-09 and the electrodes with BS 2586:1979.

<b>Repeatability</b>	pH1	± 0.1 pH	
	pH7	± 0.05 pH	
	pH13	± 0.1 pH	
<b>Output signal fluctuation</b>	pH7	± 0.025 pH	
	pH4	± 0.05 pH	
<b>Warm-up time</b>		< 5 min	
<b>Drift</b>	Short-term drift 24 h	≤ 0.03 pH	
	Long-term drift 1 week	≤ 0.05 pH	
<b>10% time and 90% time</b>	T10 ascending	< 2 s	
	T10 falling	< 2 s	
	T90 ascending	≤ 5 s	
	T90 falling	≤ 5 s	
<b>Temperature compensation</b>		Pt1000	
<b>Measurement interval</b>		2 s	
<b>Housing material</b>		PPS / PET / NBR	
<b>Dimensions (L x Ø)</b>		~ 180 x 27 mm	~ 7.1" x 1.1"
<b>Weight</b>		110 g	~ 0.2 lbs
<b>Interface</b>		RS-485, Modbus RTU	
<b>Power consumption</b>		0.2 W	
<b>Power supply</b>		12...24 VDC (± 10 %)	
<b>Connection</b>		8-pin M12 plug	
<b>Sensor cable</b>		2 m and 10 m	
<b>Required supervision</b>		Typically ≤ 0.5 h/month	
<b>Calibration / maintenance interval</b>		Typically 4 weeks	
<b>System compatibility</b>		Modbus RTU	
<b>Warranty</b>		1 year (EU & US: 2 years) on electronics; wearing parts are excluded from the warranty	
<b>Max. pressure</b>	with fixed cable	3 bar	~ 43.5 psig
	in FlowCell	1 bar, 2...4 L/min	~ 14.5 psig, 0.5 to 1 gpm
<b>Protection type</b>		IP68	NEMA 6P
<b>Sample temperature</b>		+2...+40 °C	~ +36 °F to +104 °F
<b>Ambient temperature</b>		-5...+55 °C	~ +23 °F to +131 °F
<b>Storage temperature</b>		0...+80 °C	~ +32 °F to +176 °F
<b>Inflow velocity</b>		0...3 m/second	~ 0...10 fps



# pH Sensor Digital Differential TpH-D

80S2000X0



Robust, digital differential pH probe for operation with TriBox controllers and HS100 top-hat rail module. The reference system of the pH electrode is separated from the measuring medium due to the closed design. This rules out electrode poisoning. A salt bridge that is insensitive to dirt reduces the amount of cleaning required and prevents dilution of the electrolyte. As a result, the probe achieves a particularly long service life even in heavily contaminated media. TpH-D is available with a cable length of 10 m or 2 m.

## Advantages

- Communication of measurements via digital
- Modbus RTU protocol
- the differential measurement method enables a longer lifetime of the electrodes
- all calibrations can be performed via the digital interface
- no moving mechanical parts
- plug and play with TriBox controller

## Applications

- difficult measurement of inlets to waste water treatment plants
- Process monitoring and control

## Accessories

- Cable: Extension cable 0.3 m, 2 m, 10 m, 25 m
- Controller: TriBox3, TriBox mini, HS100
- Fittings: Flow cell

## Technical specifications

<b>Measurement technology</b>		pH electrode with additional reference pH electrode in pH7 buffer solution
<b>Measurement principle</b>		Potentiometry
<b>Parameters</b>		pH value, temperature
<b>Measuring range</b>	pH	0...14 pH
	Temperature	0...+65 °C
<b>Resolution</b>	pH	0.01 pH
	Temperature	0.1 °C
<b>Accuracy</b>	pH	± 0,06 pH
	Temperature	± 0.5 °C
<b>Intrinsic error</b>	pH1	± 0.05 pH
	pH7	± 0.05 pH
	pH13	± 0.35 pH

The sensor complies with DIN EN 60746-2:2003-09 and the electrodes with BS 2586:1979.

<b>Linearity measurement error</b>		± 0.1 pH	
<b>Repeatability</b>	pH1	± 0.1 pH	
	pH7	± 0.05 pH	
	pH13	± 0.1 pH	
<b>Output signal fluctuation</b>	pH7	± 0.025 pH	
	pH4	± 0.05 pH	
<b>Warm-up time</b>		< 5 min	
<b>Drift</b>	Short-term drift 24 h	< 0.03 pH	
	Long-term drift 1 week	< 0.05 pH	
<b>10% time and 90% time</b>	T10 ascending	< 2 s	
	T10 falling	< 2 s	
	T90 ascending	≤ 5 s	
	T90 falling	≤ 5 s	
<b>Temperature compensation</b>		Pt1000	
<b>Measurement interval</b>		2 s	
<b>Housing material</b>		PPS / PET / NBR / PVDF / ceramic junction / Viton O-ring / titanium ground electrode / pH glass	
<b>Dimensions (L x Ø)</b>		~ 225 x 32 mm	~ 8.9" x 1.3"
<b>Weight</b>		180 g	~ 0.4 lbs
<b>Interface</b>		RS-485, Modbus RTU	
<b>Power consumption</b>		0.2 W	
<b>Power supply</b>		12...24 VDC (± 10 %)	
<b>Connection</b>		8-pin M12 plug	
<b>Sensor cable</b>		2 m and 10 m	
<b>Required supervision</b>		Typically ≤ 0.5 h/month	
<b>Calibration / maintenance interval</b>		Typically 4 weeks	
<b>System compatibility</b>		Modbus RTU	
<b>Warranty</b>		1 year (EU&US: 2 years) on electronics; wearing parts are excluded from the warranty	
<b>Max. pressure</b>	with fixed cable	3 bar	~ 43.5 psig
	in flow cell	1 bar, 2...4 L/min	~ 14.5 psig, 0.5 to 1 gpm
<b>Protection type</b>		IP68	NEMA 6P
<b>Sample temperature</b>		+2...+40 °C	~ +36 °F to +104 °F
<b>Ambient temperature</b>		-5...+55 °C	~ +23 °F to +131 °F
<b>Storage temperature</b>		+5...+15 °C	~ +41 °F to +59 °F
<b>Inflow velocity</b>		0...3 m/second	~ 0...10 fps

# Turbidity Sensor TTurb

81SXX00XX



The TTurb is a digital sensor for optical turbidity measurement using the 90° IR scattered light method. Depending on the sensor design it can be used in pure water up to 100 FNU as well as in raw water, waste water and process water up to 1000 FNU. TTurb is available with different cable lengths (10 m or 2 m) as well as in different versions.

As an immersion sensor, the TTurb can be used directly in the measuring medium, but is also available in the FlowCell-optimized version directly with a flow cell for bypass applications. In addition, it is possible to obtain the TTurb directly in a set with the dry-standard TTurbCAL. This standard is always directly adapted to each individual instrument and thus enables precise function tests directly on site, without any reagents.

<b>TTurb100</b>	0...100 FNU
<b>TTurb400</b>	0...400 FNU
<b>TTurb1000</b>	0...1000 FNU

## Benefits

- Reliable concentration measurements by optical methods
- Pulsed infrared scattered light procedure
- No mechanically moving parts
- Digital reading
- Preprocessing in the sensor increases measurement sensitivity

## Applications

- Measurement of turbidity in drinking water, domestic water, circulating water
- Measurement of turbidity in drinking water treatment plants with low turbidity values
- Measurement of turbidity in open waters

## Accessories

- Cable: Extension cables of 0.3 m, 2 m, 10 m, 25 m
- Controller: TriBox3, TriBox mini, HS100
- Fittings: FlowCell
- TTurbCAL



## Technical Specifications

<b>Measurement technology</b>	LED light source Photodiode detector	
<b>Measurement principle</b>	Nephelometry	
<b>Parameters</b>	Turbidity as FNU; mg/L; NTU; TSSeq	
<b>Measuring range</b>	0...100, 0...400, 0...1000 FNU	
<b>Measurement accuracy</b>	± (5 % + 0.5)	
<b>Detection limit</b>	0.5 FNU for TTurb 100 2 FNU for TTurb 400 2 FNU for TTurb 1000	
<b>Measurement wavelength</b>	860 nm, FWHM 30 nm	
<b>Reaction time T100</b>	6 s	
<b>Measurement interval</b>	≥ 3 s	
<b>Housing material</b>	PET / POM / NBR	
<b>Dimensions (L x Ø)</b>	170 x 36 mm	~ 6.7" x 1.4"
<b>Weight</b>	0.3 kg	~ 0.7 lbs
<b>Interface</b>	Ethernet (TCP/IP) RS-485 (Modbus RTU)	
<b>Power consumption</b>	typically < 0.9 W with network < 1.5 W	
<b>Power Supply</b>	12...24 VDC (± 10 %)	
<b>Connection</b>	8-pin M12 plug	
<b>Required supervision</b>	≤ 0.5 h/month typically	
<b>Calibration/ maintenance interval</b>	24 months	
<b>System compatibility</b>	Modbus RTU	
<b>Warranty</b>	1 year (EU&US: 2 years) on electronics; wearing parts are excluded from the warranty	
<b>Max. pressure</b>	with fixed cable	3 bar ~ 43.5 psig
	in FlowCell	1 bar, 2...4 L/min ~ 14.5 psig, 0.5 to 1 gpm
<b>Protection type</b>	IP68	NEMA 6P
<b>Sample temperature</b>	0...+40 °C	~ +32 °F... +104 °F
<b>Ambient temperature</b>	0...+40 °C	~ +32 °F... +104 °F
<b>Storage temperature</b>	0...+80 °C	~ +32 °F... +176 °F
<b>Inflow velocity</b>	maximum 0.1 m/second	maximum ~ 0.33 fps

The sensor meets requirements of DIN EN ISO 7027-1:2016-11.

# Conductivity Sensor

90S4301X0



Digital sensor to measure conductive conductivity especially in pure media, for operation on TriBox controllers and HS100 DIN G2 rail module. The digital technology ensures secure and interference-free signal transmission from the sensor to the controller.

## Benefits

- Reliable conductivity measurement with two conductive graphite electrodes and temperature compensation
- PVC sensor housing and graphite electrodes
- No mechanically moving parts
- Immediate installation and easy maintenance
- Modbus RTU digital communication protocol

## Applications

- Measurement of conductivity in the outflow of wastewater treatment plants
- Measurement of conductivity in industrial and water circuits

## Accessories

- Cable: Extension cables of 0.3 m, 2 m, 10 m, 25 m
- Controller: TriBox3, TriBox mini, HS100
- Fittings: FlowCell



## Technical Specifications

<b>Measurement technology</b>	Conductivity	
<b>Measurement principle</b>	Conductivity with two graphite electrodes	
<b>Parameters</b>	Conductivity	
<b>Measurement range</b>	0.00 µS... 20000 µS	
<b>Measurement accuracy</b>	±0.5 µS at 20 µS ± 5 µS at 200 µS ± 50 µS at 2000 µS ± 500 µS at 20000 µS	
<b>Response time</b>	T90 < 60s	
<b>Temperature compensation</b>	Via NTC	
<b>Housing material</b>	PVC housing, graphite electrodes	
<b>Dimensions (L x Ø)</b>	220 mm x 33 mm	~ 8.7" x 1.3"
<b>Interface</b>	RS-485 Modbus RTU	
<b>Power supply</b>	12...24 VDC	
<b>Connection</b>	8-pin M12 connector, cable length 2 m or 10 m	
<b>Maintenance interval</b>	2 years	
<b>System compatibility</b>	Modbus RTU	
<b>Warranty</b>	1 year (EU & US: 2 years) on electronics; wear parts are excluded from the warranty	
<b>Process pressure</b>	10 bar	~ 145 psig
<b>Calibration method</b>	One-point calibration with standard measuring solution	
<b>Process temperature</b>	0...50°C	~ +32 °F to +122 °F

## Conductivity Inductive

90S4401X0



The inductive conductivity sensor has 2 toroidal coils which are housed in a plastic casing and therefore do not come into contact with the surrounding solution. For this reason, it is physically impossible for the sensor surface to become soiled, coated or contaminated.

Since the inductive conductivity sensor does not determine the conductivity via electrodes, but via electrical fields, no polarization effects occur. Thus the sensor provides more accurate measurement results, especially for measurement media with high conductivities.

The sensor housing is made of Noryl, which is extremely resistant to chemicals.

### Benefits

- No contamination, coating or pollution of the sensor surface
- No polarization effects
- Low maintenance requirement

## Technical specifications

<b>Measurement technology</b>		Change of inductance
<b>Measurement principle</b>		Change of inductance with two toroidal coils
<b>Parameter</b>		Conductivity
<b>Measuring range</b>		0.5 mS/cm – 2000 mS/cm
<b>Measurement accuracy</b>		± (2% + 20 µS/cm)
<b>Drift</b>		0.1 % / Year
<b>Turbidity compensation</b>		No
<b>Temperature compensation</b>		Via NTC
<b>Data Logger</b>		No
<b>Response time</b>		T90, depending on equilibrium
<b>Measurement interval</b>		10 seconds
<b>Material</b>	Housing	Noryl
<b>Dimensions (L x Ø)</b>		119 mm x 52 mm
<b>Weight</b>		0.1 kg
<b>Interface</b>		RS-485 Modbus RTU (Baud rate = 9600)
<b>Power consumption</b>		< 75 mW
<b>Power supply</b>		7 – 40 VDC
<b>Connection</b>		8-pin M12 connector
<b>Maintenance effort</b>		≤ 0.5 h/month typical
<b>Maintenance interval</b>		24 Months
<b>Calibration method</b>		Two-point calibration in air and with standard measuring solution during initial installation, followed by validation
<b>System compatibility</b>		Modbus RTU
<b>Warranty</b>		1 year, EU & USA: 2 years
<b>Max. pressure</b>	With fixed cable	10 bar
<b>Protection type</b>		IP68
<b>Temperature</b>	Sample	-10 °C ... +70 °C (max. 85 °C)
	Ambient	-10 °C ... +70 °C (max. 85 °C)
	Storage	-20 °C ... +80 °C
<b>Inflow velocity</b>		Max. 3 m/s, Steady and constant flow

## Digital Dissolved Oxygen Sensor

90S53X1X0



The oxygen sensor uses luminescence-based optical measurement technology and measures reliably and precisely. The low maintenance and small amount of consumable materials needed by the sensor provide immediate returns on investment. Only the membrane cap must be replaced every two years. The sensor can also be used in applications with a very weak water flow. The oxygen sensor is available with a 10-meter or a 2-meter cable.

### Benefits

- Low operation costs thanks to low maintenance (no electrolyte replacement)
- Larger calibration interval thanks to low deviations
- No polarisation voltage necessary
- High degree of measurement accuracy, even at low concentrations
- Fast response time
- No minimum inflow (no oxygen consumption)

### Applications

- Measurement of dissolved oxygen in surface water, aquaculture, seawater and drinking water and wastewater plants

### Accessories

- Cable: Extension cable 0.3 m, 2 m, 10 m, 25 m
- Controller: TriBox3, TriBox mini, HS100
- Fittings: FlowCell

## Technical Specifications

<b>Measurement principle</b>	Luminescence	
<b>Parameters</b>	Dissolved oxygen	
<b>Measurement range</b>	0...20 mg/L 0...20 ppm 0...200 %	
<b>Measurement accuracy</b>	± 0.1 mg/L ± 0.1 ppm ± 1 %	
<b>Resolution</b>	0.01	
<b>Reaction time</b>	90% of the value in less than 60 seconds	
<b>Measurement interval</b>	> 5 s	
<b>Inflow velocity</b>	No movement necessary	
<b>Temperature compensation</b>	Via NTC (compensation active for temperatures below 0 °C)	
<b>Measurement range (temperature)</b>	0...+50 °C	
<b>Resolution (temperature)</b>	0.01 °C	
<b>Accuracy (temperature)</b>	0.5 °C	
<b>Membrane cap</b>	No cross-sensitivity with: pH 1...14 ; CO <sub>2</sub> , H <sub>2</sub> S, SO <sub>2</sub> Cross-sensitivity with organic solvents such as acetone, toluene, chloroform dichloromethane (methylene chloride) or chlorine gas	
<b>Material</b>	Standard version with passivated stainless steel (316L) housing, cap and screws; For seawater applications with titanium housing, cap and screws Cable: polyurethane casing; Cable grommet: polyamide Patch with active substance (black) - membrane: silicon for optical insulation	
<b>Dimensions (L x Ø)</b>	146 mm x 25 mm	~ 5.7" x 1"
<b>Weight</b>	stainless steel	~ 450 g ~ 1 lbs
	titanium	~ 300 g ~ 0.7 lbs
<b>Interface</b>	RS-485 (Modbus RTU)	
<b>Power consumption</b>	1 W	
<b>Power supply</b>	12 V (± 10 %)	
<b>Sensor cable</b>	2 m and 10 m	~ 6.6 ft and ~ 32.8 ft
<b>Calibration/maintenance interval</b>	2 years	
<b>Warranty</b>	1 year (EU & US: 2 years) on electronics; wear parts are excluded from the warranty	
<b>Max. pressure</b>	5 bar	~ 72.5 psig
<b>Protection type</b>	IP 68	NEMA 6P
<b>Sample temperature</b>	0...+50 °C	~ +32 °F... +122 °F
<b>Ambient temperature</b>	0...+50 °C	~ +32 °F... +122 °F
<b>Storage temperature</b>	-10...+60 °C	~ +14 °F... +140 °F



## Free Chlorine Sensor Digital

90S21000X



The chlorine sensor from the eCHEM sensors product range is an electrochemical sensor for measuring the chlorine concentration in water. This sensor detects free chlorine from inorganic chlorine products (chlorine gas, hypochlorite, etc.). The measuring method has a reduced pH dependency, so that pH fluctuations only have a limited impact on the measurement signal. pH value increases only lead to an approximately 10% reduction of the measuring signal per pH unit.

### Benefits

- Stable signals even with fluctuating pH values
- Abrasive particles are tolerated
- Surfactants are partially tolerated

### Applications

- Swimming pools, drinking water, seawater

### Accessories

- Cable: Extension cables of 0.3 m, 2 m, 10 m, 25 m
- Controller: TriBox3, TriBox Mini, HS100
- Fittings: FlowCell

## Technical Specifications

<b>Measurement technology</b>	Membrane-covered, amperometric potentiostatic 3-electrode system	
<b>Measurement principle</b>	Amperometry	
<b>Parameters</b>	Free chlorine with reduced pH dependency	
<b>Measurement range</b>	0...2 mg/L, 0...20 mg/L	
<b>Accuracy</b>	Measuring range 2 mg/L: at 0.4 mg/L & 1.6 mg/L < 1% Measuring range 20 mg/L: at 4 mg/L < 1% at 16 mg/L < 3 %	
<b>Response time</b>	T90: approx. 2 min	
<b>Running-in period</b>	Approx. 2 h prior to initial operation	
<b>Drift</b>	approx. -1 % per month	
<b>Temperature compensation</b>	Automatic through integrated temperature sensor; Temperature jumps must be avoided	
<b>Housing material</b>	Micro-porous hydrophilic membrane, UPVC, stainless steel 1.4571	
<b>Dimensions (L x Ø)</b>	Approx. 205 mm x approx. 25 mm	~ 8.1" x 1"
<b>Interface</b>	RS-485, Modbus RTU	
<b>Power supply</b>	9...30 VDC	
<b>Connection</b>	8-pin M12 plug	
<b>Maintenance interval</b>	typically once per week	
<b>System compatibility</b>	Modbus RTU	
<b>Warranty</b>	1 year (EU & US: 2 years) on electronics; wear parts are excluded from the warranty	
<b>Process pressure</b>	1 bar, no pressure shocks or vibrations, with retaining ring	~ 14.5 psig
<b>Calibration method</b>	Determination of chlorine with DPD-1 method	
<b>Process temperature</b>	0...+45 °C (no ice crystals in the test water)	~ +32 °F... +113 °F
<b>Flow rate</b>	Approx. 15...30 L/h in FLC-3, minimum flow dependence exists	
<b>pH range</b>	pH 4...pH 9, reduced pH dependence	
<b>Conductivity</b>	10 µS/cm...50 mS/cm (sea water)	
<b>Cross influences</b>	Combined chlorine increases measured value	

## Chlorine Dioxide Sensor Digital

90SX20000



The chlorine dioxide sensor from the eCHEM sensors product range is an electrochemical sensor for measuring the chlorine dioxide concentration in water. The range of application of the sensor covers almost all water qualities and treatments (e.g. bottle washing machine, CIP system, rinser). It can also be used in seawater. Thanks to a special membrane system, the sensor is particularly resistant to chemicals and surfactants.

### Benefits

- Surfactants are partially tolerated
- Abrasive particles are tolerated
- Higher temperatures are possible

### Applications

- All types of water treatment

### Accessories

- Cable: Extension cables of 0.3 m, 2 m, 10 m, 25 m
- Controller: TriBox3, TriBox Mini, HS100
- Fittings: FlowCell

## Technical Specifications

<b>Measurement technology</b>	Membrane-covered, amperometric 2-electrode system	
<b>Measurement principle</b>	Amperometry	
<b>Parameters</b>	Chlorine Dioxide	
<b>Measurement range</b>	0...2 mg/L, 0...20 mg/L	
<b>Accuracy</b>	Measuring range 2 mg/L: at 0.4 mg/L & 1.6 mg/L < 1 % Measuring range 20 mg/L: at 1.5 mg/L < 0.1 %	
<b>Response time</b>	T90: approx. 1 min	
<b>Running-in period</b>	Approx. 2 h prior to initial operation	
<b>Drift</b>	Approx. -1 % per month	
<b>Temperature compensation</b>	Automatic through integrated temperature sensor; Temperature jumps must be avoided	
<b>Housing material</b>	Micro-porous hydrophilic membrane, UPVC, stainless steel 1.4571	
<b>Dimensions (L x Ø)</b>	Approx. 205 mm x approx. 25 mm	~ 8.1" x 1"
<b>Interface</b>	RS-485, Modbus RTU	
<b>Power supply</b>	9...30 VDC, max. 56 mA	
<b>Connection</b>	8-pin M12 plug	
<b>Maintenance interval</b>	typically once a week measuring signal check, membrane cap change & electrolyte change depending on application	
<b>System compatibility</b>	Modbus RTU	
<b>Warranty</b>	1 year (EU & US: 2 years) on electronics; wear parts are excluded from the warranty	
<b>Process pressure</b>	1 bar, no pressure shocks or vibrations, operation with retaining ring	~ 14.5 psig
<b>Calibration method</b>	Determination of chlorine with DPD-1 method	
<b>Process temperature</b>	0...+50 °C (no ice crystals in the test water)	~ +32 °F...+122 °F
<b>Flow rate</b>	Approx. 15...30 L/h in FLC-3, minimum flow dependence exists	
<b>pH range</b>	pH 1...pH 12, reduced pH dependence	
<b>Conductivity</b>	10 µS/cm...50 mS/cm (sea water)	
<b>Cross influences</b>	Cl <sub>2</sub> does not interfere; O <sub>3</sub> : factor 25	

# Total Chlorine Sensor

90SX30000



The chlorine sensor from the eCHEM sensor product range is an electrochemical sensor for measuring the chlorine concentration in water. The sensor measures the concentration of total chlorine in a sample created by adding inorganic chlorine products (e.g. chlorine gas, sodium hypochlorite solution, calcium hypochlorite solution). The measuring method has a reduced pH dependency, so that pH value fluctuations only have a minor influence on the measuring signal. By regularly replacing the electrolyte and the membrane cap, the sensor performance can be guaranteed and ensured over a longer period of time.

## Advantages

- Stable signals even with variable pH values
- Surfactants are partially tolerated

## Applications

- Swimming pools, drinking water, seawater, brine water (15% NaCl)

## Accessories

- Cable: Extension cable 0.3 m, 2 m, 10 m, 25 m
- Controller: TriBox3, TriBox Mini, HS100
- Fittings: FlowCell

## Technical specifications

<b>Measurement technology</b>	Membrane-covered, amperometric potentiostatic 3-electrode system
<b>Measuring principle</b>	Amperometry
<b>Parameter</b>	Total chlorine (free chlorine + combined chlorine) with reduced pH dependence
<b>Measurement range</b>	0...2 mg/L; 0...20 mg/L
<b>Accuracy*</b>	Measuring range 2 mg/L: <2% at 0.4 mg/L and 1.6 mg/L Measuring range 20 mg/L: <1% at 4 mg/L and <3% at 16 mg/L
<b>Application</b>	Swimming pools, drinking water, seawater, brine water (15% NaCl), Surfactants are partially tolerated
<b>Suitable chlorinating agents</b>	Inorganic chlorine compounds: NaOCl (=chlorine bleach), Ca(OCl) <sub>2</sub> , chlorine gas, electrolytically produced chlorine



<b>Resolution</b>	Measuring range 2 mg/L: 0.001 mg/L Measuring range 20 mg/L: 0.01 mg/L	
<b>Response time</b>	T90: approx. 3 minutes (brine water approx. 5 minutes)	
<b>Running-in time</b>	Approx. 2 hours for initial start-up	
<b>Slope drift</b>	approx. -1 % per month	
<b>Temperature compensation</b>	Automatically, through an integrated temperature sensor, temperature jumps are to be avoided	
<b>pH range</b>	pH 4 - pH 12, with reduced pH dependence	
<b>Conductivity</b>	10 µS/cm - 200 µS/cm (brine water)	
<b>Zero point determination</b>	Not necessary	
<b>Slope calibration</b>	On the unit by analytical chlorine determination, DPD-4 method (DPD-1 + DPD-3)	
<b>Cross-sensitivities</b>	CIO <sub>2</sub> : factor 1; O <sub>3</sub> : factor 1.3; Corrosion inhibitors and water hardness stabilisers can cause measurement errors.	
<b>Absence of the disinfectant</b>	Max. 24 hours	
<b>Material</b>	Microporous hydrophilic membrane, PVC-U, PEEK, stainless steel (1.4571)	
<b>Dimensions (L x Ø)</b>	approx. 205 mm x 25 mm	
<b>Weight</b>	1.1 kg	
<b>Interface</b>	RS-485, Modbus RTU	
<b>Power supply / electronics**</b>	9 - 30 VDC, approx. 56 - 20 mA	
<b>Connection</b>	8-pin M12 connector	
<b>Maintenance effort</b>	Weekly control of the measuring signal recommended Depending on the water quality, the membrane cap and the electrolyte should be replaced once a year	
<b>System compatibility</b>	Modbus RTU	
<b>Warranty</b>	1 year (EU & USA: 2 years) on electronics; Wear parts are excluded from the warranty	
<b>Max. Pressure</b>	3 bar, no pressure surges and/or vibrations, with circlip	
<b>Inflow velocity</b>	approx. 15 - 30 l/h in FlowCell	
<b>Temperature</b>	Transport	+5...+50 °C (sensor, electrolyte, membrane cap)
	Sample	0...+45 °C (there must be no ice crystals in the measuring water)
	Ambient	0...+55 °C
<b>Storage</b>	Sensor	can be stored dry and without electrolyte for an unlimited period at +5...+40 °C
	Electrolyte	in original container in the dark at +5...+ 35 °C one year (after production, please note expiry date)
	Membrane cap	Can be stored in original packaging for an unlimited period at +4...+40°C (used caps cannot be stored).

\* After calibration at repeat conditions (25 °C, pH 7.2 in drinking water) from full scale value

\*\* Electronics is completely electrically isolated; digital internal measured value processing



CONTROLLER

## TriBox3

10C000000

Digital 4-channel display and control unit with integrated solenoid valve for compressed air control

TriBox3 is a measurement and control system for all TriOS sensors. The unit offers 4 sensor channels with selectable RS-232 or RS-485 interface. In addition to Modbus-RTU, various other protocols are available. A built-in valve allows the use of a compressed air purge for the sensors. In addition, the TriBox3 offers various interfaces, including an IEEE 802.3 Ethernet interface, an IEEE 802.11 b/g/n interface, a USB connection and 6 analogue outputs (4...20 mA). An integrated relay

### Advantages

- open Modbus RTU communication
- for all digital TriOS sensors
- cost-effective alternative to analogue measuring points
- integrated data logger with service logbook

### Technical specifications

#### POWER SUPPLY

<b>Voltage supply</b>	100...240 VAC, 50...60 Hz, 12...24 VDC (± 5%)
<b>Power consumption</b>	Type: 6 W, max: 50 W
<b>Protection class</b>	1
<b>Overvoltage category</b>	II

#### SENSOR INTERFACES

<b>Connection</b>	4 M12 industrial connectors for TriOS sensors
<b>Standard</b>	RS-232, RS-485
<b>Protocol</b>	Modbus-RTU, TriOS

#### MODBUS RTU

<b>Server RTU</b>	yes (on each sensor connector)
<b>Client RTU</b>	yes (on each sensor connector)
<b>Parameters</b>	Adjustable (default: 9600-8-N-1)

#### MODBUS TCP

<b>Server TCP</b>	yes
<b>TCP port</b>	Adjustable (default: 502)



can be used to trigger alarms or control external devices. Low power consumption, a robust aluminium housing and a range of interfaces make the TriBox3 ideal for all applications in environmental monitoring, drinking water, waste water treatment plants and many other areas.

- WiFi for communication
- USB interface
- TCP/IP interface
- Modbus RTU server
- also available without WiFi

## NETWORK/USB

<b>Standard</b>	Ethernet, WiFi based on IEEE 802.11b/g/n	
<b>Connection</b>	1 RJ-45 integrated WiFi antenna (for TriBox3 with WiFi)	
<b>Protocol</b>	TCP/IP, Modbus TCP, VNC	
<b>Web interface</b>	no	
<b>USB</b>	USB 2.0 (Host), USB-A socket	

## ANALOG INTERFACES

<b>Analog Output</b>	6 analogue outputs, configurable: 4...20 mA	
<b>Load</b>	max. 500 Ω	
<b>Connection terminals</b>	1.5 mm <sup>2</sup>	16 AWG
<b>Error indicator</b>	0 mA	

## SWITCH INPUT/OUTPUT

<b>Measurement trigger</b>	Trigger for global measurement (galvanically isolated), Control voltage: 12...24 VDC (± 5%) Connection terminal: 1.5 mm <sup>2</sup> (AWG 16)		Control voltage: 12...24 VDC (± 5%) Connection terminal: AWG 16
<b>Control voltage</b>	no		

## RELAY OUTPUTS

<b>Electrical specification</b>	1 x relay changeover contact (SPDT) / 250 VAC, 2 A / 30 VDC, 2 A	
<b>Connection terminals</b>	max. 2.5 mm <sup>2</sup>	max. 14 AWG

## COMPRESSED AIR CLEANING

<b>Valve</b>	integrated, max. air pressure: 5 bar
--------------	--------------------------------------

## DISPLAY

<b>Display</b>	7" capacitive touch-display (800x480 pixels)
<b>LED</b>	5 status LEDs

## DATA STORAGE

<b>Storage medium</b>	internal 2 GB microSD card, direct logging to USB stick possible.
<b>Data Export</b>	via USB 2.0 Host

## ENVIRONMENT

<b>Operating temperature</b>	-10...+50 (with pre-installed mains power cable +5...+40 °C)	~ +14 °F to +122 °F (with pre-installed mains power cable +41...+104 °F)
<b>Storage temperature</b>	-20...+70 °C	~ -4 °F to +158 °F
<b>Relative air humidity</b>	0...95 % (not condensing)	
<b>Protection type</b>	IP65	NEMA 4X
<b>Pollution level</b>	2	

## MECHANICAL SYSTEM

<b>Dimensions (width x height x depth)</b>	280 x 170 x 94 mm	~ 11" x 6.7" x 3.7"
<b>Weight</b>	3.7 kg	~ 8.2 lbs
<b>Materials</b>	Housing: aluminium die-cast alloy, front panel: acrylic glass (PMMA)	



## TriBox mini

20C000000

### Digital 2-channel controller

Digital 2-channel controller with 2 digital sensor inputs and two 4...20 mA outputs. The digital 2-channel controller is compatible with all digital TriOS sensors. All of the measured values and diagnostics data that are saved can be selected using an integrated web browser.

### Benefits

- Open Modbus RTU communication
- For all digital TriOS sensors with Modbus communication
- Low-cost alternative to analogue measuring points
- Integrated data logger with service logbook
- WiFi for communication via web browser



## TriBox mini NET

20C100000

Instead of WiFi, the TriBox mini NET has an Ethernet connection via the right port.

### Technical Specifications

<b>Voltage supply</b>	100...240 VAC, 50...60 Hz, 10...15 VDC
<b>Power consumption</b>	Typ: 2 W, max.: 40 W
<b>Connection</b>	2 M12 industrial connectors for TriOS sensors
<b>Standard</b>	RS-232, RS-485
<b>Protocol</b>	Modbus RTU, TriOS
<b>Server RTU</b>	no
<b>Client RTU</b>	yes (on each sensor connector)
<b>Parameters</b>	Adjustable (default: 9600-8-N-1)

# TriBox mini // CONTROLLER

<b>Standard</b>	<b>TB mini</b>	WiFi based on IEEE 802.11b/g/n	
	<b>TB mini NET</b>	Ethernet based on IEEE 802.3i	
<b>Connection</b>	<b>TB mini</b>	Built-in WiFi antenna	
	<b>TB mini NET</b>	COM2 sensor interface (right) with M12→RJ45 cable	
<b>Protocol</b>		TCP/IP	
<b>Web interface</b>		yes	
<b>USB</b>		no	
<b>Analog output</b>		2 analog outputs, configurable 4...20 mA	
<b>Load</b>		max. 500 Ω	
<b>Connection terminals</b>		1.5 mm <sup>2</sup>	16 AWG
<b>Error indicator</b>		no	
<b>Measurement trigger</b>		no	
<b>Control voltage</b>		12 VDC (only for TriOS accessories) terminal: max. 2.5 mm <sup>2</sup>	12 VDC (only for TriOS accessories), terminal: max. 14 AWG
<b>Electrical specification</b>		1 relay changeover contact (SPDT) / 250 VAC, 2 A / 30 VDC, 2 A	
<b>Connection terminals</b>		max. 2.5 mm <sup>2</sup>	max. AWG 14
<b>Valve</b>		Optional: external connection possible	
<b>Display</b>		3.5 inch capacitive touch display (320x240 pixels)	
<b>LED</b>		5 status LEDs	
<b>Storage medium</b>		Internal 2 GB microSD card	
<b>Data export</b>	<b>TB mini</b>	Via WiFi (compressed tar file)	
	<b>TB mini NET</b>	via Ethernet (compressed tar file)	
<b>Operating temperature</b>		0...+40 °C	~ +32 °F to +104 °F
<b>Storage temperature</b>		-20...+70 °C	~ -4 °F to +158 °F
<b>Relative air humidity</b>		0...95 % (non-condensing)	
<b>Protection type</b>		IP65 (the network cable has a lower protection class)	NEMA 4X (the network cable has a lower protection class)
<b>Dimensions (width x height x depth)</b>		150 x 139 x 80 mm	~ 5.9" x 5.5" x 3.2"
<b>Weight</b>		1.6 kg	~ 3.5 lbs
<b>Materials</b>		Housing: Aluminium die-cast alloy Front panel: acrylic glass (PMMA)	

## HS100

11C300000

G2 DIN rail interface module for all TriOS G2 sensors

G2 interface with WiFi for DIN rail mounting (45 mm wide) for all digital TriOS sensors with G2 interface; WiFi interface (on/off switchable), (RS-485) Modbus RTU and Modbus TCP/IP.

Input voltage: 24 VDC ( $\pm 10\%$ )

### Benefits

- Open Modbus RTU communication
- For all digital TriOS sensors
- Low-cost alternative to analog measuring points
- WiFi for communication via web browser



## Technical Specifications

### ENERGY SUPPLY

<b>Voltage supply</b>	24 VDC (± 10 %)
<b>Power consumption</b>	typical: 2.5 W

### SENSOR INTERFACES

<b>Connection</b>	1x M12 plug for TriOS G2 sensors
<b>Standard</b>	RS-485
<b>Protocol</b>	Modbus RTU
<b>Analog interfaces</b>	No
<b>Switch input/output</b>	No
<b>Relay outputs</b>	No
<b>Compressed air cleaning</b>	No

### MODBUS RTU

<b>Client RTU</b>	Yes (connected to the sensor)
<b>Parameter</b>	Adjustable (default: 9600-8-N-1)

### MODBUS TCP

<b>Server TCP</b>	Yes
<b>TCP port</b>	Adjustable (default: 502)

### NETWORK/USB

<b>Standard</b>	Ethernet, WiFi IEEE 802.11b/g/n
<b>Connection</b>	2 x RJ-45, external WiFi antenna (SMA)
<b>Protocol</b>	TCP/IP, Modbus TCP
<b>Web Interface</b>	Yes
<b>USB</b>	No
<b>Data storage</b>	No

### DISPLAY

<b>Display</b>	No
<b>LED</b>	4 x status LED

### AMBIENT

<b>Operating temperature</b>	0...+40 °C	~ +32 °F to +104 °F
<b>Storage temperature</b>	-20...+70 °C	~ -4 °F to +158 °F
<b>Relative air humidity</b>	0...95 % (non-condensing)	
<b>Protection type</b>	IP20	NEMA 1

### MECHANICS

<b>Dimensions</b>	45 x 99 x 119 mm	~ 1.8" x 3.9" x 4.7"
<b>Weight</b>	0.25 kg	~ 0.5 lbs
<b>Materials</b>	Housing: polyamide (PA) Front panel: acrylic glass (PMMA)	



DRY STANDARDS



## SolidCAL

20AXX000X



### Solid secondary standard for TriOS fluorometers

The SolidCAL solid secondary standard enables fast function and calibration checks of the TriOS enviroFlu-HC fluorometer for PAH detection and the nanoFlu fluorometer for the detection of chl-a, cdom or phycocyanin. The simple use of the standard ensures fast, accurate device verification, even on site. A standard is available for each TriOS fluorometer – for enviroFlu HC also in different concentrations. In addition to the standard, the SolidCAL kit includes a cleaning fluid and carrier.



## FieldCAL

20A210003

### Secondary standard for RAMSES radiometers

The FieldCAL secondary standard enables reliable calibration and function tests of RAMSES radiometers in the field. Thanks to the special design, radiance (ARC), as well as irradiance (ACC) sensors can be checked. An adapter used for radiance sensors is included in the set. Small dimensions and a sturdy transport box make FieldCAL a useful tool for light measurements in the field.



### Benefits

- High stability
- Battery-powered
- Small size
- Easy to use
- For irradiance and radiance sensors

### Technical Specifications

<b>Wavelength range</b>	430...730 nm	
<b>Light source</b>	White LED with spherical diffuser	
<b>Stability</b>	Type Better than 1% after 1 minute	
<b>Battery</b>	4 AA (not rechargeable)	
<b>Operating time</b>	Type 50 hours per battery charge	
<b>Material</b>	POM, seawater-resistant plastic	
<b>Dimensions (ØxL)</b>	50 mm x 140 mm	~ 2" x 5.5"
	50/60 mm x 182 mm (with ACC Adapter)	~ 2/2.4" x 7.2" (with ACC Adapter)



Photometer

## DryCAL

20A100008

Fluorometer



Radiometer

DryCAL enables high-precision validation of the corresponding enviroFlu sensor. Every DryCAL corresponds precisely to a certain sensor and is calibrated to its specific properties, which significantly increases the precision of the calibration.

The DryCAL is sold as a set with two dry calibration standards.

eCHEM

## TTurbCAL

20A100007

Controller



Dry Standards

The TTurbCAL is a solid matter standard, which provides an FNU value for reagent-free calibration of TriOS TTurb sensors. The standard is very easy to use and makes device calibration on site much easier.

Accessories

Systems









ACCESSORIES







## G2 InterfaceBox

11CX00000



The G2 InterfaceBox is available in variants with and without WiFi. G2 sensors from TriOS Mess- und Datentechnik GmbH can be configured and controlled via the interface box. This is enabled by the web interface of the G2 sensors, which can be accessed via a WiFi or LAN connection. The web interface can be accessed with any browser.

### Technical Specifications

<b>Voltage supply</b>	24 VDC ( $\pm 10\%$ )	
<b>Power consumption</b>	$\leq 1.5\text{ W}$ plus sensor (only the WiFi variant)	
<b>Connection</b>	1 M12-plug for TriOS G2 sensors	
<b>Standard</b>	IEEE 802.3	
<b>Protocol</b>	Web interface (only with G2 sensors)	
<b>Analog interfaces</b>	no	
<b>Switch input/output</b>	no	
<b>Standard</b>	IEEE 802.3, IEEE 802.11 b/g/n (only the WiFi variant)	
<b>Connection</b>	1 RJ-45 external WiFi antenna (SMA) (only the WiFi variant)	
<b>Protocol</b>	TCP/IP (only with G2 sensors)	
<b>Web interface</b>	no	
<b>USB</b>	no	
<b>Data storage</b>	no	
<b>Operating temperature</b>	0...+40 °C	$\sim +32\text{ °F}$ to +104 °F
<b>Storage temperature</b>	-20...+70 °C	$\sim -4\text{ °F}$ to +158 °F
<b>Relative air humidity</b>	0...95 % (non-condensing)	
<b>Protection type</b>	IP20	NEMA 1
<b>Dimensions (width x height x depth)</b>	60 x 35 x 126 mm / 60 x 35 x 162 mm	$\sim 2.4\text{''} \times 1.3\text{''} \times 5\text{''}$ / $\sim 2.4\text{''} \times 1.3\text{''} \times 6.4\text{''}$

## TTrig

12C100000



TTrig is a measurement interval switch for the TriOS G2 sensors OPUS and NICO. Due to its low standby power (<1 mW), it is ideally suited for operation with a battery as power supply. It is designed to minimize energy consumption between measurements.

The TTrig features an additional connection for commissioning and controlling a wiper (W55).

Remote or self-sufficient measuring stations can thus be operated maintenance-free for several months.

An RJ-45 Ethernet interface provides access to the sensor's G2 web interface for downloading the measurement data from the data logger with a notebook.

### Technical Specifications

#### POWER SUPPLY

<b>Voltage supply</b>	12...24 VDC, max. 4A
<b>Power in standby</b>	<1mW

#### SENSOR INTERFACES

<b>Connection</b>	M12 for TriOS G2 sensors; 1x RJ-45
<b>Standard</b>	RS-485
<b>Protocol</b>	Modbus RTU
<b>Analog interfaces</b>	No

#### OTHER INTERFACES

<b>Connection</b>	1x M8 connector for wiper W55 Trigger output
-------------------	---

#### ENVIRONMENT


<b>Operating temperature</b>	0...+40 °C
<b>Storage temperature</b>	-10...+70 °C
<b>Relative air humidity</b>	0...95 % (non-condensing)
<b>Protection type</b>	IP64

#### MECHANICAL SYSTEM

<b>Dimensions (width x height x depth)</b>	140 x 80 x 60 mm
<b>Weight</b>	0.5 kg

## SDI-12 Converter

11C100001

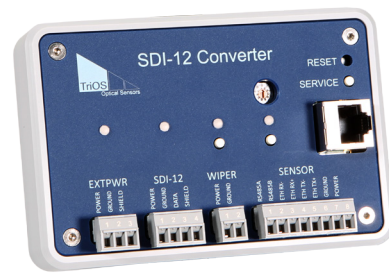

The SDI-12 converter translates the Modbus protocol used by TriOS sensors into SDI-12 and thus serves as an interface between the sensors and the SDI-12 interface of the peripherals.

The SDI-12 converter translates the Modbus protocol used by TriOS sensors into SDI-12 and thus serves as an interface between the sensors and the SDI-12 interface of the peripherals. Due to its low standby power (< 20 mW) it is perfectly suited for operation with a battery as power supply. Four status LEDs inform the user continuously about the current operation mode and power supply. Both, measurements with G2 sensors and wiper cleaning cycles can be controlled via the converter. The implemented Ethernet interface allows data export and sensor configuration via the web interface.

With three manual buttons Sensor Scan, Wiper Cleaning and Service Mode can be activated. The position of the rotary encoder determines the sensor address via which the sensor is addressed.

### Technical Specifications

<b>External power supply</b>	Power supply	12...24 VDC (± 10 %)	
	Connection terminal	1.5 mm <sup>2</sup> (AWG 16)	
<b>SDI-12 Interface</b>	Power supply	10...24 VDC (± 10 %)	
	Power consumption in standby	< 20 mW	
	Protocol	SDI-12	
<b>Wiper Interface</b>	Connection terminal	1.5 mm <sup>2</sup> (AWG 16)	
	Standard	W55 Wiper	
<b>Sensor Interface</b>	Connection terminal	1.5 mm <sup>2</sup> (AWG 16)	
	Standard	RS485	
	Protocol	Modbus RTU	
<b>Network*</b>	Standard	Ethernet	
	Connection	RJ45	
<b>Operating temperature</b>		-10...+40 °C	~ 14 °F to +104 °F
<b>Storage temperature</b>		-10...+70 °C	~ 14 °F to 158 °F
<b>Relative air humidity</b>		0...95 % (non-condensing)	
<b>Protection type</b>		IP30	NEMA 1
<b>LED</b>		4x RGB Status LED	
<b>Housing material</b>		PVC, Perspex	
<b>Dimensions (L x W x H)</b>		120 x 80 x 45mm	~ 4.7" x 3.2" x 1.8"
<b>Weight</b>		250 g	~ 0.6 lbs
<b>System compatibility</b>		SDI-12	
<b>Warranty</b>		1 Year (EU & US: 2 Years)	

\* Only available if the connected sensor has an Ethernet interface.

## FC68 FlowCell for enviroFlu

10A100003



The FlowCell FC68 is used for bypass installation of the enviroFlu. The measurement medium is directed through the cell, making measurement without a reagent on land possible.

## FC48 FlowCell for TriOS Photometers

10A10000X



The FlowCell FC48 is used for bypass installations of the TriOS Photometer with a diameter of 48 mm. Different path lengths are available.

# Ultrasonic FlowCell

10A10001X



## FlowCell with integrated ultrasound cleaning

In addition to the conventional FlowCell, TriOS now offers an ultrasonic FlowCell, which combines the bypass installation with direct cleaning.

Ultrasonic sound prevents deposits forming on the measurement windows of the sensor. The built-in viewing window and the illumination unit allow the state of the optical path be monitored at any time.

The FlowCell is suitable for a photometer with a 10 mm path as the FC 48/10 USC and for a photometer with 100 mm path as the FC 48/100 USC.

## Technical Specifications

<b>Voltage supply</b>	12...24 VDC (± 10%)	
<b>Power consumption</b>	≤ 15 W	
<b>Control connection</b>	Trigger input to initiate ultrasonic cleaning (galvanically isolated); Control voltage: 5...24 VDC Connection via M5 socket (a suitable M5 connection cable with open ends is included in the delivery)	
<b>Power cable</b>	M5 socket with optional coaxial connector power adapter cable and matching 230 V power adapter	
<b>Max. internal pressure</b>	1 bar, 2...4 L/min	~ 14.5 psig, 0.5 to 1gpm
<b>Operating temperature</b>	+1...+40 °C	~ 34 °F to +104 °F
<b>Storage temperature</b>	-20...+70 °C	~ -4 °F to +158 °F
<b>Protection type</b>	IP64	NEMA3
<b>Dimensions (width x height x depth)</b>	115 x 136 x 90 mm	~ 4.5" x 5.4" x 3.5"
<b>Weight</b>	1 kg	2.2 lbs
<b>Materials</b>	Housing: Polyoxymethylene (POM)	



## FlowCell for eCHEM Sensors

10A0X0000



### Modular FlowCell system with simple installation concept

The specially developed FlowCell for the eCHEM series is based on a simple, clever system. The side and base pieces of the FlowCell can be detached easily with only one turn and new modules can be added. The sensor-specific adapter pieces can also be replaced easily. Only the black attachment element is needed to attach it to the wall. The FlowCell can then simply be placed in front and attached with a bolt.

The system is designed to be modular, which means that every extension can be ordered individually and customized according to the application. This gives you complete freedom in the design of your application and you can adapt the system in just a few simple steps. The eCHEM FlowCell system is compatible with the FlowCell for turbidity.



## FlowCell for nanoFlu

10A090000



## FlowCell for Turbidity Sensors

10A050000

A specialized FlowCell was developed for the sensors of the turbidity series to minimise reflections. This design maximises the precision of the measurements. This FlowCell is compatible with the FlowCell for eCHEM sensors and the nanoFlu FlowCell.



## Sedimeter

02A100011



The sedimenter is a flow-through device for use in turbid water. The sample is passed through the sedimenter without pre-filtering. The sensor can also be installed in the sedimenter equipped with a wiper.

Suitable for OPUS, NICO, enviroFlu & microFlu. Version for LISA, LISA color and VIPER on request.

### Technical specifications

<b>Measuring device</b>	Suitable for OPUS, NICO, enviroFlu & microFlu with and without wiper. Version for LISA, LISA color and VIPER on request.
<b>Pressure range</b>	Unpressurised, open drain
<b>Material</b>	PVC
<b>Dimensions</b>	Installation plate for wall mounting: 800 mm x 495 mm
<b>Weight</b>	Sediment incl, wall plate only: 14.7 kg



## Wiper W55 V2

02A100008 • 02A100X18



The TriOS Wiper W55 V2 provides an additional cleaning option for all TriOS photometers with path lengths from 1 mm up to 10 mm. The wiper housing can be mounted on the sensor in just a few steps and provides reliable cleaning of the measurement windows. The new magnetic axis lock allows quick and easy wiper blade replacement, without any tools.

The new version of the wiper now features blockage detection and removal, and a service mode that increases the life of the wiper through regular use. The accessory can also be used in seawater up to a depth of 10m.

### Technical Specifications

<b>Path lengths</b>	1 mm, 2 mm, 5 mm, 10 mm
<b>Control port</b>	4-pin M8-plug A suitable M8 connection cable with open end is included in the scope of delivery.
<b>Trigger input</b>	5 – 24 VDC (±10% )
<b>Power consumption trigger input</b>	2...15 mA
<b>Operating time (max.)</b>	3 Seconds
<b>Dimensions L x Ø</b>	175 mm x 80 mm
<b>Weight</b>	0.52 kg
<b>Material</b>	NBR, POM, TPE (PP, EPDM), Titanium, V4A
<b>Power supply</b>	12 – 24 VDC (± 10 %)
<b>Power consumption</b>	approx. 2 – 6 W in operation; max. 0.75 W in standby
<b>Maintenance effort</b>	≤ 0.5 h/month typical
<b>Maintenance interval</b>	depending on application
<b>Warranty</b>	1 year (EU & USA : 2 years)
<b>Max. Pressure</b>	1 bar
<b>Protection Type</b>	IP68
<b>Inflow velocity</b>	up to 10 m/s
<b>Operating temperature</b>	+2...+40 °C
<b>Storage temperature</b>	-10 °C...+70 °C

## AirShot2

02A100010



The compact pressured air cleaning system AirShot2 works with pressured air pulses instead of a continuous air flow, thus reducing the required amount of air significantly and enabling a very compact design.

Furthermore the pressure pulses perform a more effective cleaning than continuous air flow systems, making the AirShot2 a valuable addition to every system.

AirShot2 can be used as an alternative to a standard compressor and can be operated with a TriBox3.

The cleaning process of the AirShot2 requires only 10 seconds. It can be triggered at a minimum interval of 5 minutes.

### Technical specifications

#### ENERGY SUPPLY

<b>Voltage supply</b>	<b>230 V Version</b>	230 VAC, max. 200 W, 0.86 A
	<b>110 V Version</b>	110 VAC, max. 200 W, 1.8 A

#### INTERFACES

<b>Connection</b>	for 6 mm hoses ( 4 mm inner diameter )
<b>Power cable length</b>	3 m
<b>Control line length</b>	5 m
<b>Trigger Input</b>	12...24 VDC, M8 4-Pin
<b>Wiper Output</b>	M8 4-Pin

#### DISPLAY

<b>LED</b>	3 x Status LED
------------	----------------

#### AMBIENT

<b>Temperature Impulse Box</b>	-5...+40 °C
<b>Temperature Compressor</b>	-10...+40 °C
<b>Protection type</b>	IP44

#### MECHANICS

<b>Size w/h/d</b>	190 x 260 x 125 mm and 90 x Ø46 mm
<b>Weight</b>	4.4 kg
<b>Housing</b>	Polycarbonate

#### SETTINGS

<b>Standard</b>	10 s every 5 min
<b>Max. Pressure</b>	7 bar

## Solenoid Valve V2 for TriBox mini

03A000003




The TriBox mini supports operation of an external, controllable valve for the purposes of water or compressed-air cleaning. All Solenoid Valve V2 settings can be configured via the TriBox mini menu ("Measurement & Cleaning", sub-item "Cleaning").

The Solenoid Valve V2 can be installed very easily. It has four 5.3 mm holes for installation.

Available configurations:

- Interval cleaning
- Duration of cleaning
- Pause before measurement

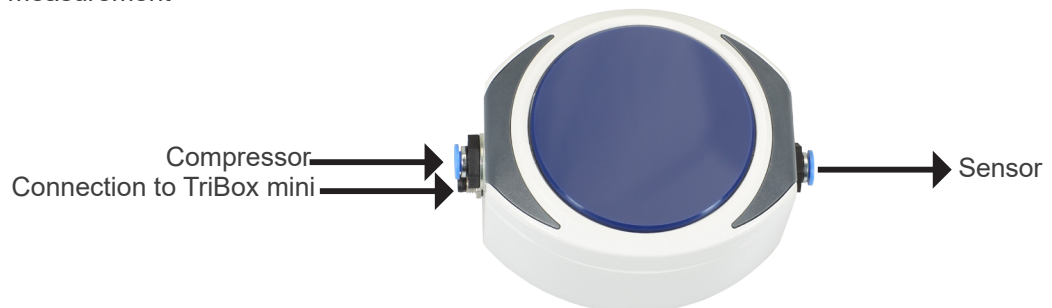


### Technical Specifications

<b>Dimensions</b>	110 x 97 x 55 mm	~ 4.3" x 3.8" x 2.2"
<b>Weight</b>	~ 0.6 kg	~ 1.3 lbs
<b>Max. pressure</b>	5 bar	~ 72.5 psig
<b>Voltage supply</b>	12 VDC	
<b>Power consumption</b>	3 W	
<b>Connection</b>	for 6 mm hoses (4 mm inner diameter)	for ~0.23" hoses (~0.16" inner diameter)
<b>Housing</b>	Die-cast aluminium alloy	
<b>Protection type</b>	IP65	NEMA 4X
<b>Cables</b>	1.5 m connector cable with M8 plug	~ 4.9 ft connector cable with M8 plug
<b>Temperature</b>	2...+40 °C	~ 35.6 °F to +104 °F



## Modbus Interface Board

07A000000

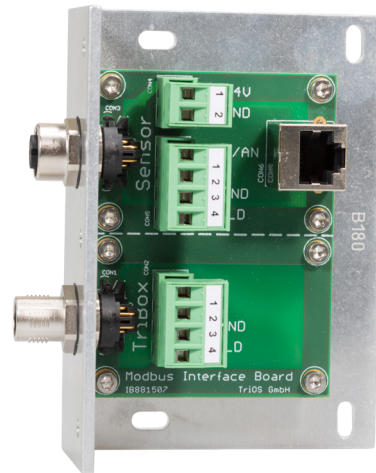


The Modbus interface controls the sensor interfaces of the TriBox3, TriBox Mini or the TriOS G2 sensors with connectors, providing simple, flexible connection options. The TriBox is connected via a standard M12 extension cable. TriOS G2 sensors with M12 connectors can be connected directly. To operate the sensors, a power supply must be connected to the interface, which is connected directly to the sensor. Additional mounting holes in the aluminium L profile make installation easy.

### Technical Specifications

<b>Voltage supply</b>	12...24 VDC (+/- 10%), only required for operation with sensors 2 pin PCB plug connector	
<b>G2 sensor connector</b>	1 M12 built-in socket	
<b>G2 sensor serial tap</b>	4 pin PCB plug connector	
<b>G2 sensor network tap</b>	1 RJ-45 socket, standard: IEEE 802.3i (10BaseT)	
<b>TriBox connection</b>	1 M12 built-in plug, connection via standard M12 extension	
<b>TriBox serial tap</b>	4 pin PCB plug connector	
<b>Operating temperature</b>	0...+40 °C	~ +32 °F to +104 °F
<b>Storage temperature</b>	-20...+70 °C	~ -4 °F to +158 °F
<b>Relative air humidity</b>	0...95 % (non-condensing)	
<b>Protection type</b>	IP10	NEMA 1
<b>Dimensions (width x height x depth)</b>	110 x 40 x 95 mm	~ 4.3" x 1.6" x 3.7"
<b>Weight</b>	180 g	~ 0.4 lbs
<b>Material</b>	Aluminium	

## TAMMO

07A000001

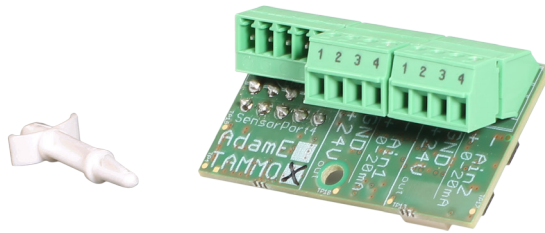

TAMMO is an expansion module for TriBox3, which converts analog signals to RS-485 Modbus RTU protocol. The analog to Modbus module provides a total of two current inputs, where both the parameter and the unit for two parameters can be set.



**The TriBox3 must have at least software version V1.5.4 installed. For older versions, a software upgrade must be performed first.**

### Technical Specifications

#### POWER SUPPLY

<b>Power supply</b>	12 V / 24 V (done by TriBox3)
<b>Power consumption</b>	< 100 mW

#### SENSOR INTERFACES

<b>Connection terminal</b>	1.5 qmm (AWG 16)
<b>Standard</b>	RS-485
<b>Protocol</b>	Modbus RTU

#### ANALOG INTERFACES

<b>Analog input</b>	2x current input: 4-20 mA (default setting in TriBox3) 0-20 mA (configurable at TriBox3)
<b>Measurement accuracy</b>	± 0,2 % of Full Scale Range
<b>Measurement rate</b>	~ 60 SPS
<b>Connection terminal</b>	1.5 qmm (AWG 16)

#### AMBIENT

<b>Operating temperature</b>	-10...+50 °C
<b>Storage temperature</b>	-20...+70 °C
<b>Relative air humidity</b>	0...95 % (non-condensing)
<b>Protection type</b>	IP00

#### MECHANICS

<b>Dimensions L/W/H</b>	59x32x28 mm
<b>Weight</b>	14 g
<b>System compatibility</b>	TriBox3, as of software V1.5.4
<b>Warranty</b>	1 year (EU & USA: 2 years)

## Float

05A000005



The TriOS float is the ideal solution for use in fluctuating water levels. The float comes with two sizes of sensor brackets so that both the TriOS photometer with its 48 mm diameter and the enviroFlu with its 68 mm diameter can be attached. One sensor at a time can be attached to the float.

TriOS also offers sensor brackets for small sensors, such as the nanoFlu (05A000006). With this, several sensors can be attached to one float.

The float stays on the surface of the water with the sensor always in the medium. The float can easily be removed from the medium by its handle to do a check or clean it. Side attachments of stainless steel cables prevent the float from being carried away.





## Pipe Adapter

06A0000XX

For installation in existing pipe systems, such as pool edge fixtures, TriOS offers adapter pieces with G1 or NPT1 thread for the following sensors:

- TpH
- TpH-D
- TTurb
- Conductivity
- Oxygen

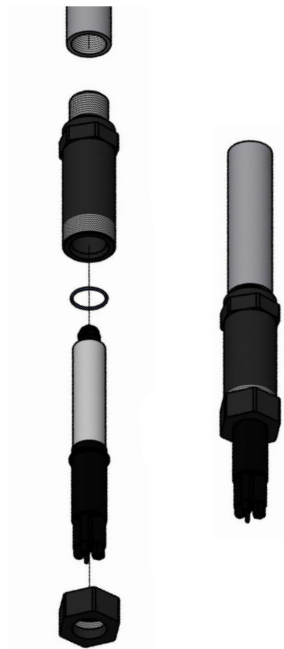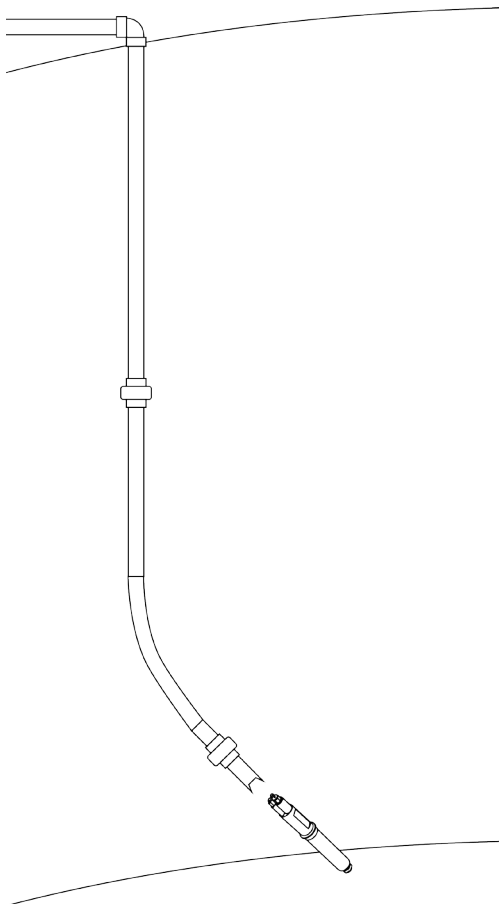

## Telescopic Rod

12A000000



The new TriOS telescopic rod provides a solid and reliable mounting method for the TriOS dissolved oxygen sensor. The sensor is permanently mounted in the head section of the telescopic rod and can be immersed in the medium by extending the telescopic tubes to a distance of 6.8m. The rod can be held by hand or attached to a railing or similar with the supplied double clamp. Due to the material mix of carbon and fiberglass, the rod is grippy and light at the same time.

### Technical specifications

<b>Dimensions LxW</b>	6800 mm x 90 mm
<b>Weight</b>	2.32 kg
<b>Material</b>	Telescopic rod: carbon fiberglass mix, bracket: aluminum



## RAMSES Frames

05A000000



05A000002



## Hydraulic Clamps CL48 & CL68

01A100000X





## Water Quality Panel

11A10000X

The modern TriOS bypass panel makes it possible to cleanly and precisely monitor water quality on site. The sensor is passed through the FlowCells and thus analysed for various parameters. The panel can be ordered in different designs and sensor assemblies.



<b>11A100002</b>	Water quality panel with pH, conductivity, turbidity, chlorine, TriBox mini
<b>11A100003</b>	Water quality panel with pH, conductivity, turbidity, chlorine, TriBox 3
<b>11A100004</b>	Water quality panel with pH, conductivity, turbidity, TriBox mini

## pH Buffer Set

80P000002



### pH Buffer Solution

TriOS provides the necessary certified buffer solution with pH4 and pH 7 to calibrate TriOS TpH-D sensors. No transfer of fluids necessary, as the containers fit directly into the calibration process.

Quick and easy calibration of all EGC Quality Analyzer sensors directly at the site. No dangerous fluids, no expertise needed! Let the wizard of the TriBox guide you through every step of the process.



## Panels

11A10000X



## Flange DN50 / DN80 / DN100

Flange solution for pipeline installation, according to DIN11851.




## Compressed Air Cleaning Head for enviroFlu

02A100003



## Protective cage for enviroFlu or W55 wiper


00P100005 . 00P100010

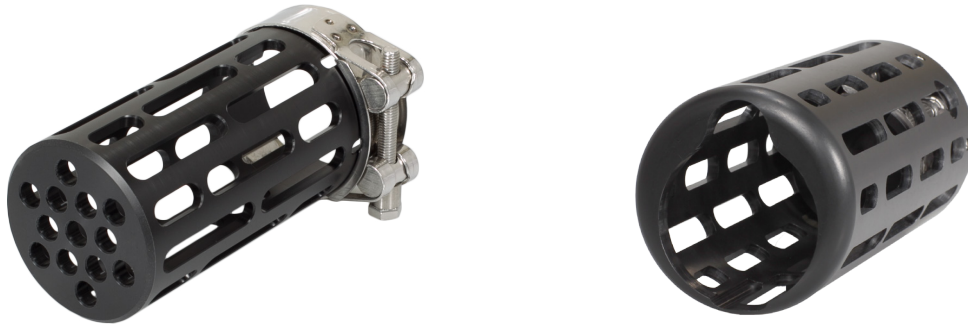

## Cuvette holder

for 5 mm quartz glass cuvette with 10 mm path\*

10A200000

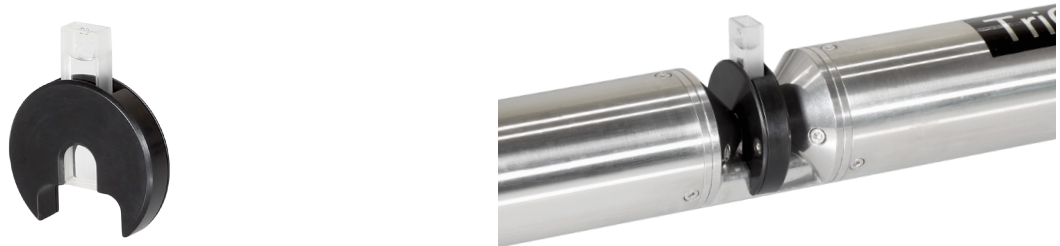

\*For all photometers: OPUS, LISA, LISA color, VIPER, NICO

## VALtub for photometer validation\*

10A30000X



\*For all photometers: OPUS, LISA, LISA color, VIPER, NICO

## Optics Cleaning Set

05A000004



## Cable

50A0XXXX0



## 5-input M12 Sensor Connector Box

50A000001












SYSTEMS

## EGC Water Analyzer

11A10001X

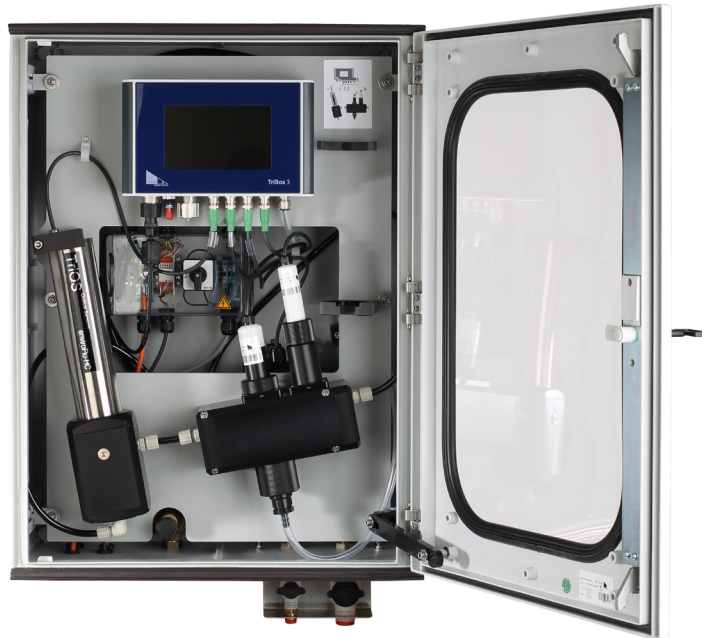

The EGC Water Analyzer is TriOS' latest development in the monitoring of various wastewater-parameters. It can be equipped with three sensors: enviroFlu for identification of polycyclic aromatic hydrocarbons (PAH), TTurb for turbidity measurements and TpH-D for the determination of the pH value.

Inside the measurement cabinet is a TriBox3 to which all sensors are connected. The Ethernet interface and the analogue outputs are directly connected to the transparent connector box.

Certified by DNV and ABS!



Equipped with the enviroFlu, TTurb and TpH-D in the appropriate configuration, a TriBox3 (from software version 1.4.22) and wire rope dampers, the analyzer has a ship approval according to IMO regulations MEPC.259(68).

## Technical Specifications

### POWER SUPPLY

<b>Voltage supply</b>	100 ... 240 VAC, 50 ... 60 Hz	
<b>Power consumption</b>	Max. 50 W	

### INTERFACES

<b>digital</b>	Ethernet	
<b>analogue</b>	6 outputs: 4...20 mA	
<b>Load</b>	max. 500 Ω	
<b>Protocol</b>	Modbus TCP/IP	
<b>Parameters</b>	PAH (MEPC.259(68)) pH (BS EN 60746-2:2003) Turbidity (DIN EN ISO 7027:2016) Temperature (of TpH-D) Flow (internal) PAH turbidity corrected	

### MECHANICAL SYSTEM

<b>Size (width x height x depth)</b>	600 x 800 x 337 mm	~ 23.6" x 31.5" x 13.3"
<b>Weight</b>	43 kg (without sensors) 45.5 kg (with sensors)	~ 95 lbs (without sensors) ~ 100 lbs (with sensors)

### ENVIRONMENT

<b>Sample temperature</b>	+2°C...+40°C	~ +36 °F to +104 °F
<b>Ambient temperature</b>	0°C...+45°C	~ +32 °F to +113 °F
<b>Storage temperature</b>	-20°C...+80°C	~ -4 °F to +176 °F
<b>Relative air humidity</b>	0...95% (non-condensing)	
<b>pH value</b>	> pH4	
<b>Protection type</b>	IP56	NEMA 4

### INLET

<b>Max. pressure</b>	Inlet pressure	1 to 25 bar maximum	~ 14.5 psig to 363 psig maximum
	Internal	max. 3 bar	~ 43.5 psig
<b>Flow volume</b>	2...5 L/min		
<b>Internal volume</b>	Approx. 1 L		



## MEAS100 11A100007



### Automatic sampling with the **Monitoring Event Automatic Sampler**

The new TriOS sample collection system is a stationary sampler with integrated measurement technology in a stainless steel housing. It uses thermostatic control for automatic sample extraction according to the vacuum principle. Up to 12 sample containers can be used.

### Technical Specifications

<b>Housing</b>	Double-walled stainless steel (material 1.4301) with 40 mm insulation. Housing separated into sample compartment and control compartment, each with lockable door. Upper door with Plexiglas window. Protective cover made of Styrosun that can be propped open for connection and maintenance work
<b>Thermostatic control</b>	Independent, regulated cooling / heating with four settings, no-frost Sample compartment temperature: 4 °C (adjustable from 0...9.9 °C)      ~ +39.2 °F (adjustable from 32...49.8 °F)


<b>Sampling modes</b>	Time-dependent, volume-dependent, event controlled, manual	
<b>Control</b>	Microprocessor control, sleep mode (<5 mA), 8-16 V power supply, foil keypad, with key field (0-9, ESC, ENT, cursor keys) graphical display (128x64 pixels), background illumination	
<b>Data storage</b>	3000 entries, non-volatile data memory; sampling and malfunction report data, including sample extractions, bottle changes, reports, external signals	
<b>Programming</b>	Twelve (12) freely programmable application programs with program links	
<b>Program start options</b>	<ul style="list-style-type: none"> <li>• Immediately</li> <li>• Date / time</li> <li>• Day of week / time</li> <li>• With external signal</li> </ul>	
<b>Programme end / stop options</b>	<ul style="list-style-type: none"> <li>• After 1 run</li> <li>• After X runs</li> <li>• Continuous operation</li> <li>• Date/time</li> </ul>	
<b>Pause mode</b>	Interruption of program run at any time	
<b>Overfilling protection</b>	Adjustable from 1–999 samples / bottles	
<b>Intervals setting</b>	1 min. to 99 h 59 min in steps of 1 minute	
<b>Pulse setting</b>	1 to 9999 pulses/sample	
<b>Manual sample extraction</b>	Possible at any time without interrupting the current program run	
<b>Program protection</b>	Up to 5 years after loss of power supply	
<b>Interface</b>	Mini-USB, RS-232	
<b>Signal inputs</b>	<ul style="list-style-type: none"> <li>• 2 analog: 0/4...20 mA</li> <li>• 8 digital (volume, event, 1 freely programmable)</li> <li>• Pulse length at least 60 ms; switch level 7...24 V</li> <li>• Max. working resistance: 500 Ohm; max. length of signal cable: 30 m / 98.4 ft</li> </ul>	
<b>Signal output / status messages</b>	8 digital; 1 of them being the collective malfunction message	
<b>Metering system</b>	Vacuum system 1000 ml U system, suction height up to 40 m / 131.2 ft	
<b>Single sample volume accuracy</b>	Vacuum system: < 2.5 % or +/- 3 ml	
<b>Dimensions (height x width x depth)</b>	1490 (2040 with open cover) x 605 x 645 mm	~ 58.7" (80.3" with open cover) x 23.8" x 25.4"
<b>Weight</b>	~ 110 kg with composite container	~ 242.5 lbs with composite container
<b>Materials with medium contact</b>	PC, PVC, silicone, PS, PE, EPDM	
<b>Auxiliary power / Power supply</b>	230 V / 115 V /AC	
<b>Power consumption</b>	approx. 350 VA (with cooling)	
<b>Ambient</b>	-20...+43 °C	~ -4 °F to +109.4 °F
<b>Sample temperature</b>	0...+40 °C	~ +32 °F to +104 °F
<b>Standards</b>	CE; sampling according to ISO 5667-10, EN16479	

## Online measurement with integrated wall-mounted sampler

For use in hard-to-reach measuring points, for example, TriOS has taken the proven stationary sampler with pressure-vacuum technology and combined it with optical, reagent-free sensors.

A clear display and numeric keypad allow programming in a very short time. The sampler offers time- and quantity-based sampling and is extremely low maintenance due to its simple design. It is weather-proof and can be mounted or fixed to a wall.

The pressure vacuum sampler operates according to ISO 5667 and thus meets the requirements for subsequent reproducible analysis with the integrated online sensor or analysis in the laboratory.

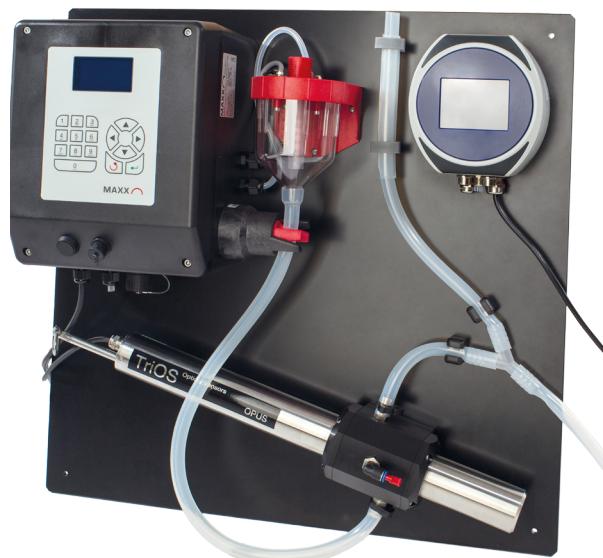











ANNEX

## Opus UV: measurement ranges depending on the path length\*

Parameters	Measurement principle	Unit	Factor	Path length (mm)							
				0.3	1	2	5	10	20	50	
Absorbance (AU)	Spectral	AU**	-	0.01...2.2	0.01...2.2	0.01...2.2	0.01...2.2	0.01...2.2	0.01...2.2	0.01...2.2	0.01...2.2
Absorbance (1/m)	Spectral	1/m	-	50...7300	15...2200	7.5...1100	3.440	1.5...220	0.75...110	0.36...44	0.03...4.4
Nitrate N-NO <sub>3</sub>	Spectral	mg/L	-	1.0...330	0.3...100	0.15...50	0.06...20	0.03...10	0.015...5	0.006...2	0.002...0.2
Nitrate NO <sub>3</sub>	Spectral	mg/L	-	4.43...1460	1.33...440	0.67...220	0.27...88	0.13...44	0.067...22	0.030...9	0.010...3
Nitrite N-NO <sub>2</sub>	Spectral	mg/L	-	1.7...500	0.5...150	0.25...75	0.1...30	0.05...15	0.025...7.5	0.01...3	0.003...10
Nitrite NO <sub>2</sub>	Spectral	mg/L	-	5.6...1650	1.65...500	0.82...250	0.33...100	0.17...50	0.083...25	0.033...10	0.01...20
DOC <sub>eq</sub>	Spectral	mg/L	-	17...3300	5.0...1000	2.5...500	1.0...200	0.5...100	0.25...50	0.1...20	0.01...20
TOC <sub>eq</sub>	Spectral	mg/L	-	17...3300	5.0...1000	2.5...500	1.0...200	0.5...100	0.25...50	0.1...20	0.01...20
COD <sub>eq</sub>	Spectral	mg/L	-	100...7300***	30...2200***	15...1100***	6.0...440***	3.0...220***	1.5...110***	0.6...44***	0.2...22
BOD <sub>eq</sub>	Spectral	mg/L	-	100...7300***	30...2200***	15...1100***	6.0...440***	3.0...220***	1.5...110***	0.6...44***	0.2...22
KHP	Spectral	mg/L	-	17...13300	5.0...4000	2.5...2000	1.0...800	0.5...400	0.25...200	0.1...80	0.01...80
SAC <sub>254</sub>	Single wavelengths	1/m	-	50...7300	15...2200	7.5...1100	3.0...440	1.5...220	0.75...110	0.3...44	0.03...44
COD-SAC <sub>eq</sub> ****	Single wavelengths	mg/L	1.46	75...10600	22...3200	11...1600	4.4...640	2.2...320	1.1...160	0.44...64	0.044...64
BOD-SAC <sub>eq</sub> *****	Single wavelengths	mg/L	0.48	24...3500	7.2...1050	3.6...525	1.44...210	0.72...105	0.36...52.5	0.15...21	0.015...21
TSS <sub>eq</sub> *****	Single wavelength	mg/L	2.6	130...4300	40...1300	20...650	8.0...260	4...130	2.0...65	0.8...26	0.08...26

\* under laboratory conditions

\*\* unit of absorption level

\*\*\* depends on the composition of the COD or BOD (sum parameters)

\*\*\*\* based on KHP (note: 100 mg COD standard solution is equivalent to 85 mg/L KHP)

\*\*\*\*\* based on SiO<sub>2</sub>

Note:

1 mg/L N-NO<sub>3</sub> is equivalent to 4.43 mg/L NO<sub>3</sub>

1 mg/L N-NO<sub>2</sub> is equivalent to 3.28 mg/L NO<sub>2</sub>

VIPER: measurement ranges depending on the path length\*

Parameters	according to	Unit	Factor	Path length (mm)	Path length (mm)	Path length (mm)	Path length (mm)	Path length (mm)	Path length (mm)
				10	50	100	150	250	
SAC <sub>436</sub>	DIN EN ISO 7887: 2012-04	1/m	-	1...250	0.2...50	0.1...25	0.06...17	0.04...10	
SAC <sub>525</sub>	DIN EN ISO 7887: 2012-04	1/m	-	1...250	0.2...50	0.1...25	0.06...17	0.04...10	
SAC <sub>620</sub>	DIN EN ISO 7887: 2012-04	1/m	-	1...250	0.2...50	0.1...25	0.06...17	0.04...10	
True colour 410	DIN EN ISO 7887: 2012-04	mg/L Pt	18.52	20...3750	4...750	2...375	1.2...250	0.8...150	
Pt-Co color 390	DIN EN ISO 6271:2016-05	mg/L Pt	7.4	8...1500	1.6...300	0.8...150	0.4...100	0.2...60	
Pt-Co-Color 455	DIN EN ISO 6271:2016-05	mg/L Pt	36.4	40...7500	8...1500	4...750	2.4...500	1.4...300	
Cr-Co color 380	-	° (degree of colour)	9.7	10.0...2000	2...400	1...200	0.6...130	0.4...80	
Cr-Co colour 413	Gost 3351-74	° (degree of colour)	34.1	40...7000	8...1400	4...700	2.6...450	1.6...275	

\* under laboratory conditions

LISA UV: measurement ranges depending on the path length\*

Parameters	according to	Unit	Factor	Path length (mm)	Path length (mm)	Path length (mm)	Path length (mm)	Path length (mm)	Path length (mm)
				1	2	5	10	50	
SAC <sub>254</sub>	DIN 38404-3: 2005-07 C3	1/m	-	5...1500	2.5...750	1...300	0.5...150	0.1...30	
COD <sup>**</sup> <sub>eq</sub>	-	mg/L	1.46	8...2200	4...1100	1.5...440	0.8...220	0.15...45	
BOD <sup>**</sup> <sub>eq</sub>	-	mg/L	0.48	2.5...700	1.25...350	0.5...140	0.25...70	0.05...15	
TOC <sup>**</sup> <sub>eq</sub>	-	mg/L	0.584	3...880	1.5...440	0.6...175	0.3...90	0.06...20	
Turbidity 530 nm	-	FAU <sup>***</sup>	3.2054 / 0.0096	20...4000	10...1400	4...420	2...200	0.4...40	

\* under laboratory conditions

\*\* based on KHP (Note: 100 mg COD standard solution is equivalent to 85 mg/L KHP)

\*\*\*Formazine attenuation unit

LISA color: measurement ranges depending on the path length\*

Parameters	according to	Unit	Factor	Path length (mm)	Path length (mm)	Path length (mm)	Path length (mm)	Path length (mm)	Path length (mm)
				10	50	100	150	250	
SAC <sub>436</sub>	DIN EN ISO 7887: 2012-04	1/m	-	0.5...150	0.1...30	0.05...15	0.03...10	0.02...6	
SAC <sub>525</sub>	DIN EN ISO 7887: 2012-04	1/m	-	0.5...150	0.1...30	0.05...15	0.03...10	0.02...6	
SAC <sub>620</sub>	DIN EN ISO 7887: 2012-04	1/m	-	0.5...150	0.1...30	0.05...15	0.03...10	0.02...6	
True color 410	DIN EN ISO 7887: 2012-04	mg/L Pt	18.52	10.0...2800	2...560	1.0...280	0.6...185	0.4...110	
Pt-Co color 390	DIN EN ISO 6271:2016-05	mg/L Pt	7.4	4.0...1100	0.8...220	0.4...110	0.3...75	0.2...45	
Pt-Co-Color 455	DIN EN ISO 6271:2016-05	mg/L Pt	36.4	20...5500	4.0...1100	2.0...550	1.5...360	0.8...220	
Cr-Co color 380	-	° (degree of colour)	9.7	5.0...1500	1.0...300	0.5...150	0.3...100	0.2...60	
Cr-Co color 413	Gost 3351-74	° (degree of colour)	34.1	20...5500	4.0...1100	2.0...550	1.5...360	0.8...220	

\* under laboratory conditions


\*\*Formazine attenuation unit



NICO: Measurement ranges depending on the path length\*

Parameters	Unit	Factor	Path length (mm)	Path length (mm)	Path length (mm)	Path length (mm)	Path length (mm)	Path length (mm)	Path length (mm)	Path length (mm)
			0,3	1	2	5	10	20	50	
Nitrate NO3-N	[mg/L]	-	0...200	0...60	0...30	0...12	0...6	0...3	0...1.2	
Nitrate NO3	[mg/L]	-	0...886	0...266	0...133	0...53	0...26.6	0...13	0...5	

\* under laboratory conditions

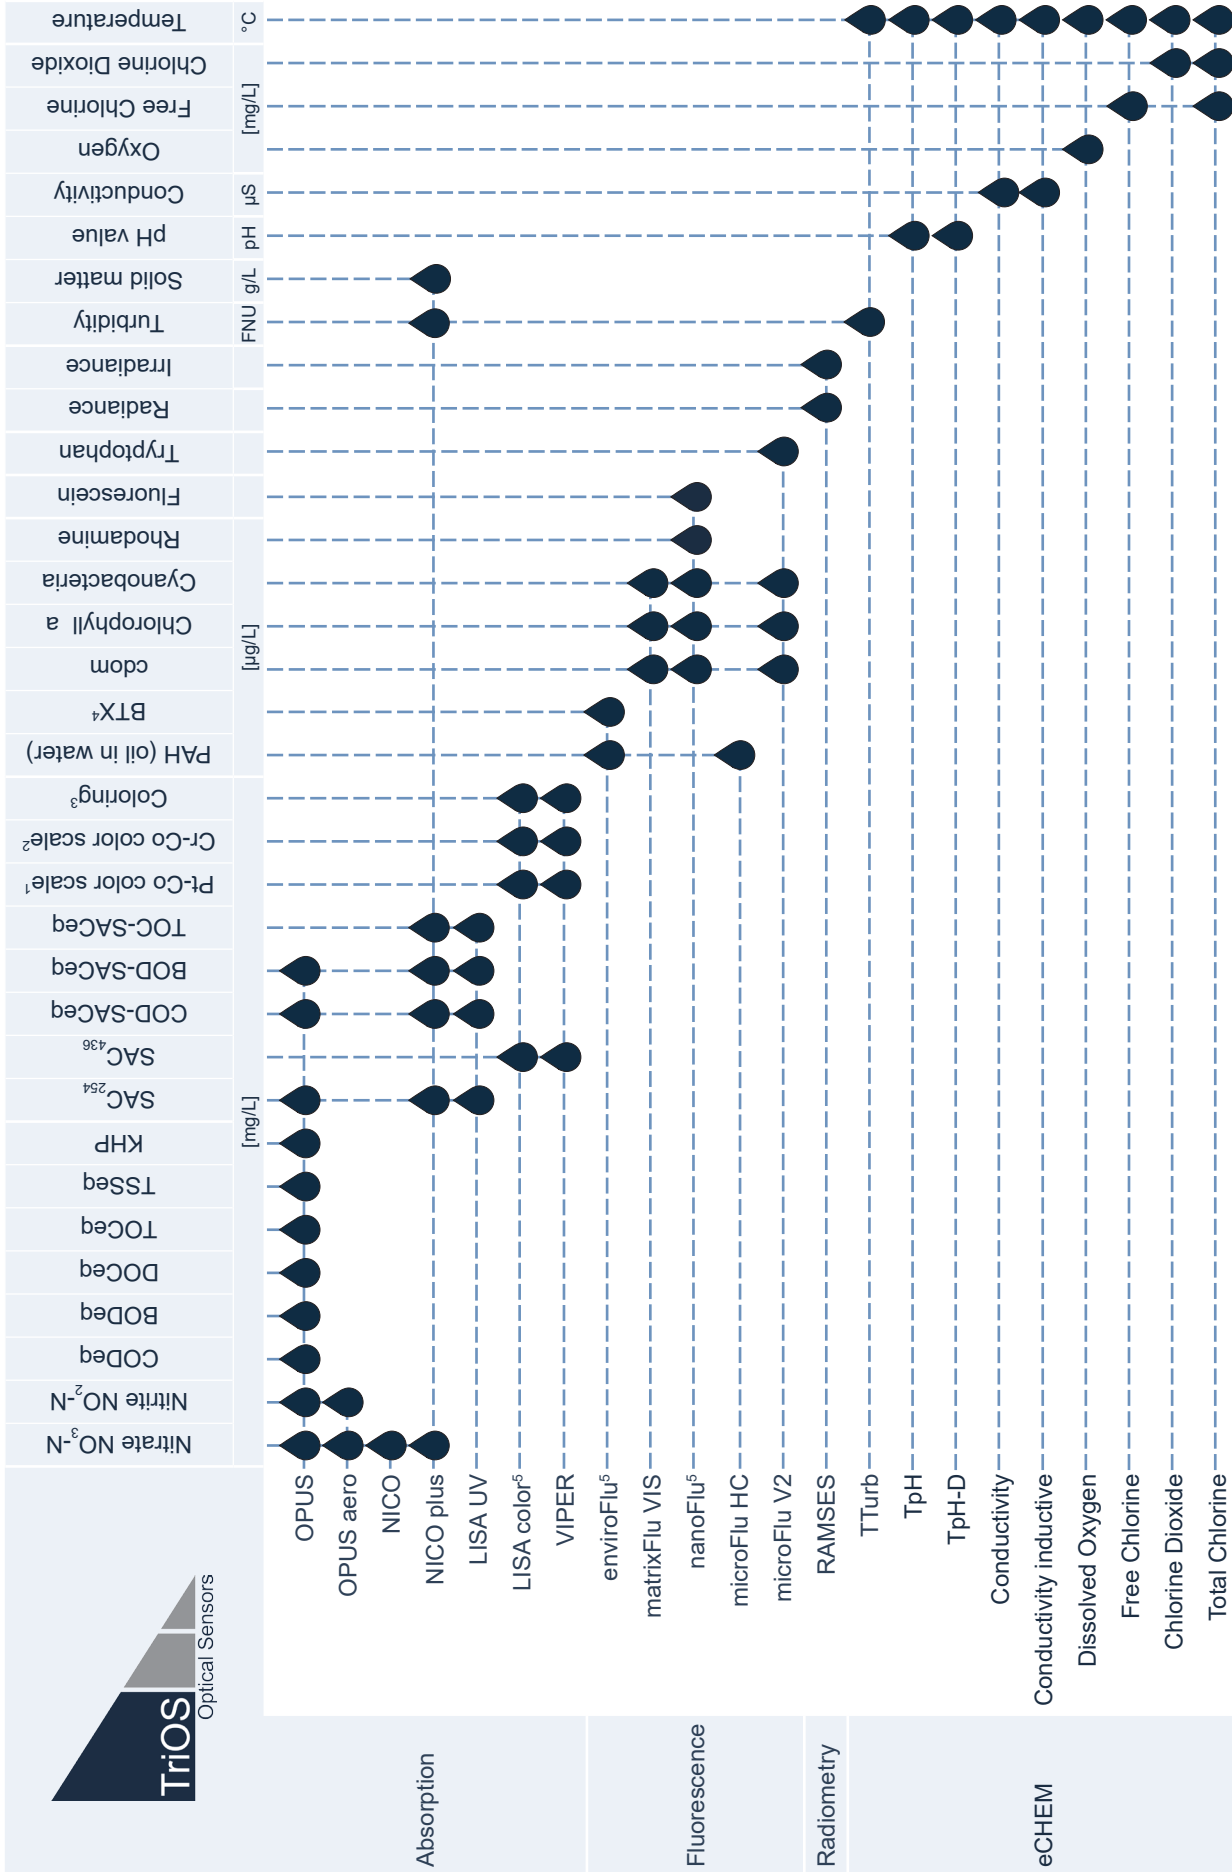

<sup>1</sup> 390 nm, 455 nm (Apha/Hazen)  
<sup>2</sup> 380 nm, 413 nm  
<sup>3</sup> 410 nm, 436 nm, 525 nm, 620 nm  
<sup>4</sup> mono-aromatic hydrocarbons  
<sup>5</sup> depending on version

		TriOS Protocol	Modbus able	SDI-12 Converter compatible (Device Driver available)
Absorption	OPUS	✗	✓	✓
	OPUS aero	✗	✓	✓
	NICO	✗	✓	✓
	NICO plus	✗	✓	✓
	LISA UV	✗	✓	✓
	LISA color <sup>5</sup>	✗	✓	✓
	VIPER	✗	✓	✓
Fluorescence	enviroFlu	✓	✗	✗
	enviroFlu HC MB	✗	✓	✓
	matrixFlu VIS	✗	✓	✓
	nanoFlu	✗	✓	✓
	microFlu HC	✗	✓	✓
	microFlu V2	✗	✓	✓
Radiometry	RAMSES	✓	✗	✗
	RAMSES G2	✗	✓	✓
Turbidity	TTurb	✗	✓	✓
eCHEM	TpH	✗	✓	✓
	TpH-D	✗	✓	✓
	Conductivity	✗	✓	✗
	Conductivity Induktive	✗	✓	✗
	Dissolved Oxygen	✗	✓	✗
	Free Chlorine	✗	✓	✗
	Chlorine Dioxide	✗	✓	✗
	Total Chlorine	✗	✓	✗



