


Data sheet

# TiS / SiS – TeS / SeS

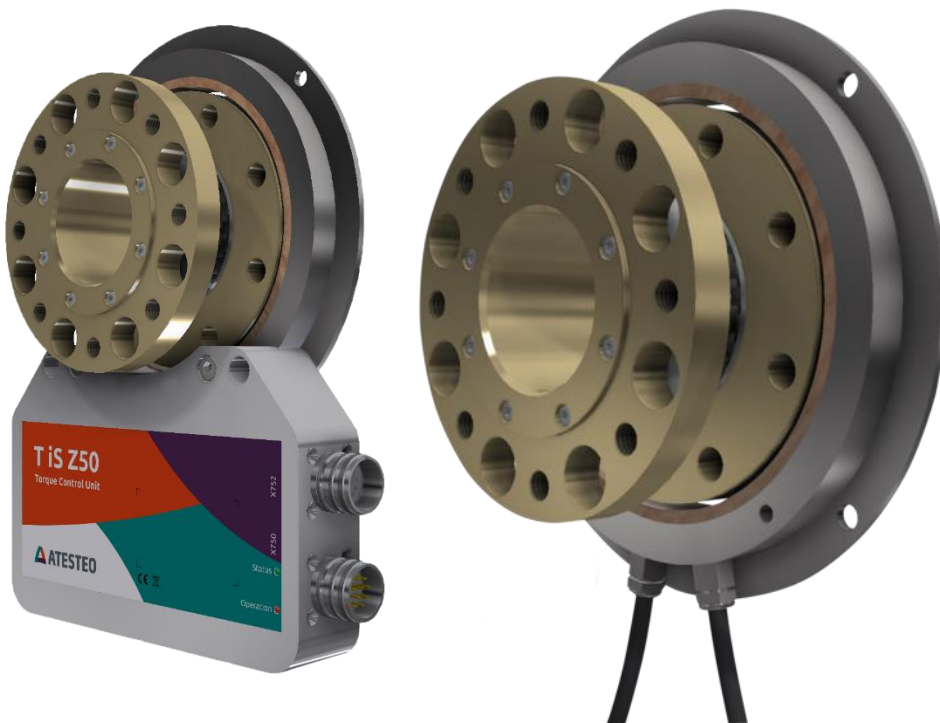

## Technical data

Type	-	TeS Z50	TeS Z50	SeS Z50
Accuracy class	%	$\leq \pm 0.10$	$\leq \pm 0.05$	$\leq \pm 0.05$
Rated torque ( $M_{dN}$ )	Nm	50	100 200 500	500 1,000

## Torque measuring system

Technology	-	Rotating		
Rated torque ( $M_{dN}$ ) #1	Nm	50	100 200 500	500 1,000
Rated torque short measurement range (optional, minimum) ( $M_{dNs}$ ) #2	Nm	N/A	N/A N/A 100	150 200
Accuracy class extended (for $M_{dN}$ )	%	N/A		
Outputs	-	Frequency (RS422), Voltage, Current, CAN bus, Alert		
Test signal	-	see test report		

## Mechanical dimensions #3

Outer diameter of rotor #4	mm	122
Lengths (Rotor, without centering)	mm	65
Pitch circle diameter #5	mm	101.5

## Speeds and speed measuring systems

Speed detection (integrated)	-	without
Speed detection (optional)	-	without
Maximum Speed without speed detection system	rpm	15,000
Optional increased speed	rpm	25,000
Maximum speed with magnetic speed encoder	rpm	N/A
Maximum speed with optical speed encoder	rpm	N/A
Maximum speed with inductive speed encoder	rpm	N/A

Torque accuracy class per output type (related to  $M_{dN}$ )

Frequency output	%	$\leq \pm 0.10$	$\leq \pm 0.05$	$\leq \pm 0.05$
CAN output	%	$\leq \pm 0.10$	$\leq \pm 0.05$	$\leq \pm 0.05$
Voltage output	%	$\leq \pm 0.10$		
Current output	%	$\leq \pm 0.10$		
Frequency output (option higher accuracy)	%	N/A		
CAN (option higher accuracy)	%	N/A		

## Technical data

Type	-	TeS Z50	TeS Z50	SeS Z50
Accuracy class	%	$\leq \pm 0.10$	$\leq \pm 0.05$	$\leq \pm 0.05$
Rated torque ( $M_{d_n}$ )	Nm	50	100 200 500	500 1,000

Linearity deviation including hysteresis related to $M_{d_n}$ #6				
Frequency, 0%...30%	%	$\leq \pm 0.030$	$\leq \pm 0.015$	$\leq \pm 0.015$
Frequency, 30%...60%	%	$\leq \pm 0.050$	$\leq \pm 0.030$	$\leq \pm 0.030$
Frequency, 60%...100%	%	$\leq \pm 0.100$	$\leq \pm 0.050$	$\leq \pm 0.050$
CAN, 0%...30%	%	$\leq \pm 0.030$	$\leq \pm 0.015$	$\leq \pm 0.015$
CAN, 30%...60%	%	$\leq \pm 0.050$	$\leq \pm 0.030$	$\leq \pm 0.030$
CAN, 60%...100%	%	$\leq \pm 0.100$	$\leq \pm 0.050$	$\leq \pm 0.050$
Voltage output	%		$\leq \pm 0.10$	
Current output	%		$\leq \pm 0.10$	
Rel. standard deviation of the reproducibility according to DIN 1319, by reference to variation of the output signal (rel. to $M_{d_n}$ )				
Frequency output	%	$\leq \pm 0.05$	$\leq \pm 0.03$	$\leq \pm 0.03$
CAN output	%	$\leq \pm 0.05$	$\leq \pm 0.03$	$\leq \pm 0.03$
Voltage output	%	$\leq \pm 0.10$	$\leq \pm 0.05$	$\leq \pm 0.05$
Current output	%	$\leq \pm 0.10$	$\leq \pm 0.05$	$\leq \pm 0.05$
Temperature influence per 10K in the nominal temperature range on the output signal related to the actual value of signal span (rel. to $M_{d_n}$ )				
Frequency output	%	$\leq \pm 0.10$	$\leq \pm 0.05$	$\leq \pm 0.05$
CAN output	%	$\leq \pm 0.10$	$\leq \pm 0.05$	$\leq \pm 0.05$
Voltage output	%		$\leq \pm 0.10$	
Current output	%		$\leq \pm 0.10$	
Temperature influence per 10K in the nominal temperature range on the zero signal (rel. to $M_{d_n}$ )				
Frequency output	%	$\leq \pm 0.10$	$\leq \pm 0.05$	$\leq \pm 0.05$
CAN output	%	$\leq \pm 0.10$	$\leq \pm 0.05$	$\leq \pm 0.05$
Voltage output	%		$\leq \pm 0.10$	
Current output	%		$\leq \pm 0.10$	
Long-term drift over 48h at reference temperature				
Voltage output	mV		<1.0	
Current output	$\mu A$		<0.80	

Technical data

Type	-	TeS Z50	TeS Z50	SeS Z50
Accuracy class	%	≤±0.10	≤±0.05	≤±0.05
Rated torque (Md <sub>n</sub> )	Nm	50	100 200 500	500 1,000
Nominal sensitivity (range between zero torque and rated torque)				
Frequency output	kHz	20		
Voltage output	V	5.0 / 10.0 / 2.5 / 5.0		
Current output	mA	8 / 10		
Output signal at zero torque				
Frequency output	kHz	60		
Voltage output	V	0.0 / 0.0 / 2.5 / 5.0		
Current output	mA	12 / 10		
Nominal output signal				
Frequency output at positive nominal value	kHz	80		
Frequency output at negative nominal value	kHz	40		
Voltage output at positive nominal value	V	5 / 10 / 5 / 10		
Voltage output at negative nominal value	V	-5 / -10 / 0 / 0		
Current output at positive nominal value	mA	20 / 20		
Current output at negative nominal value	mA	4 / 0		
Max. modulation range				
Frequency output	kHz	30...90		
Voltage output	V	-10.5...10.5		
Current output	mA	0...24		
Group delay time (main TCU)				
Frequency output	μs	10		
Voltage output	μs	3,000		
CAN	μs	1,000		

Technical data

Type	-	TeS Z50	TeS Z50	SeS Z50
Accuracy class	%	≤±0.10	≤±0.05	≤±0.05
Rated torque (M <sub>dN</sub> )	Nm	50	100 200 500	500 1,000

Speed measuring system		Inductive (track at rotor)		
Pulse per rev (PPR)	ppr.	N/A		
Maximum speeds (related to PPR)	rpm	N/A		
Max. output frequency (RS422)	kHz	N/A		
Minimum speed for sufficient pulse stability	rpm	N/A		
Speed measuring system		Magneto resistive (2 tracks approx. 90 degree phase shifted)		
Pulses per rev (PPR)	ppr.	N/A		
Maximum speeds (related to PPR)	rpm	N/A		
Max. output frequency (RS422)	kHz	N/A		
Minimum speed for sufficient pulse stability	rpm	N/A		
Nominal clearance (sensor - pole ring)	mm	N/A		
Working airgap (sensor - pole ring)	mm	N/A		
Nominal axial displacement (rotor - stator) #7	mm	N/A		
Tolerance to nominal axial displacement (rotor - stator)	mm	N/A		
Speed measuring system		Optical		
Pulses per rev (PPR)	ppr.	N/A		
Maximum speeds (related to PPR)	rpm	N/A		
Max. output frequency (RS422)	kHz	N/A		
Minimum speed for sufficient pulse stability	rpm	N/A		
Nominal radial displacement (rotor - stator)	mm	N/A		
Tolerated radial displacement (rotor - stator) #7	mm	N/A		
Nominal axial displacement (rotor - stator) #7	mm	N/A		
Tolerance to nominal axial displacement (rotor - stator)	mm	N/A		

Technical data

Type	-	TeS Z50	TeS Z50	SeS Z50
Accuracy class	%	≤±0.10	≤±0.05	≤±0.05
Rated torque (Md <sub>n</sub> )	Nm	50	100 200 500	500 1,000

Angular measuring system			
Pulses per rev	ppr.	N/A	
Resolution	°	N/A	
Output signals	-	N/A	
Measurement ranges	°	N/A	

Technical data

Type	-	TeS Z50	TeS Z50	SeS Z50
Accuracy class	%	≤±0.10	≤±0.05	≤±0.05
Rated torque (Mdn)	Nm	50	100 200 500	500 1,000

Temperature ranges		
Nominal temperature range (Rotor)	°C	0...80
Operating temperature range (Rotor) #8	°C	-20...85
Storage temperature range (Rotor)	°C	-30...85
Nominal temperature range (Stator)	°C	0...80
Operating temperature range (Stator) #9	°C	-20...85
Storage temperature range (Stator)	°C	-30...85
Nominal temperature range (TCU)	°C	0...70
Operating temperature range (TCU)	°C	-20...70
Storage temperature range (TCU)	°C	-30...85

Mechanical shock (EN 60068-2-27)		
Quantity	-	1,000
Duration	ms	3
Acceleration	m/s²	650

Vibration load (EN 60068-2-6)		
Frequency	Hz	10...2,000
Duration	min.	150
Acceleration	m/s²	200

Load limits #10				
Limit torque, related to Mdn	%	400	400	500
Breaking torque approx., related to Mdn	%	800	800	1,000
Axial limit force	kN	7.60	7.60 7.60 10.00	15.60 20.90
Lateral limit force	N	1,067.00	1,067.00 1,067.00 1,546.00	2,150.00 3,150.00
Bending limit torque	Nm	48.00	48.00 48.00 67.00	92.00 140.00

Technical data

Type	-	TeS Z50	TeS Z50	SeS Z50
Accuracy class	%	≤±0.10	≤±0.05	≤±0.05
Rated torque (Md <sub>n</sub> )	Nm	50	100 200 500	500 1,000

Mechanical values				
Torsional stiffness	kNm/rad	278	278 278 376	611 844
Angle of twist at Md <sub>n</sub>	°	0.010	0.020 0.040 0.080	0.050 0.070
Axial stiffness	kN/mm	191	191 191 254	390 523
Radial stiffness	kN/mm	64	64 64 93	134 197
Bending stiffness	kNm/°	1.60	1.60 1.60 2.30	3.40 5.10
Deflection at axial limit force	mm	<0.05		
Additional radial deviation at lateral limit force	mm	<0.02		
Parallel deviation at bending limit torque	mm	<0.07	<0.07	<0.06 <0.07
Inherent frequency	Hz	1,500	1,500 1,500 1,800	1,700 2,000
Balance quality-level (DIN ISO 1949)	-	G2.5		
Inertia of rotor	kgm²	0.00210	0.00210	0.00350 0.00360
Max. limits for relative shaft vibration (peak to peak) #11	µm	$S_{(p-p)} = \frac{9000}{\sqrt{n}}$		



## Technical data

Type	-	TeS Z50	TeS Z50	SeS Z50
Accuracy class	%	≤±0.10	≤±0.05	≤±0.05
Rated torque (M <sub>dN</sub> )	Nm	50	100 200 500	500 1,000

## Weight approx.

Rotor #12	kg	1.0	1.0 1.0 1.1	1.7 1.8
Stator (without speed encoder) #12	kg		1.00	

## Mounting distances (without optional speed detection system)

Nominal radial displacement (rotor - stator)	mm	2.0
Tolerance to nominal radial displacement (rotor - stator)	mm	≤±0.2
Nominal axial displacement (rotor - stator)	mm	2
Tolerance to nominal axial displacement (rotor - stator)	mm	≤±0.5

## Flatness and concentricity tolerances rotor

Circular run-out-axial tolerance #13	mm	0.01
Circular run-out-radial tolerance #13	mm	0.01

## Power supply

Nominal supply	V	(DC) 24
Supply range #14	V	(DC) 23...25
Max. current consumption in measuring mode	A	<0.70
Max. current consumption in start-up mode	A	<2
Nominal power consumption	W	<17

## Load resistance

Frequency output	-	RS422
Voltage output	kOhm	≥5

## Dynamic

Frequency output	kHz	≤7
Voltage output	kHz	≤1
Current output	kHz	≤1
CAN output conversation rate	1/s	≤1,000

Technical data

Type	-	TeS Z50	TeS Z50	SeS Z50
Accuracy class	%	≤±0.10	≤±0.05	≤±0.05
Rated torque (Md <sub>n</sub> )	Nm	50	100 200 500	500 1,000
Miscellaneous				
Protection class (rotor)	-	IP54		
Protection class (stator)	-	IP54		
Protection class (rotor, extended)	-	On request		
Protection class (stator, extended)	-	On request		
Pitch circle screw information	-	8 * M10 (8.8)	8 * M10 (8.8)	8 * M10 (10.9) 8 * M10 (12.9)
CAN	-	2B		
Configuration interface	-	RS232		
Central hole	mm	50		
Material	-	Titanium	Titanium	Steel
Measuring range (related to Md <sub>n</sub> )	%	120		
Compatible evaluation units (TCU)	-	TCU2		
Stator type	-	eS		
Sales information				
Article number	-	10002439	10002439	10004151
U.S. FCC certificate	-	Not required		

## Remarks and information

Link no.	Topic	Remark
#1	Nominal torque	Based on customer requests, the measurement systems can optionally be optimized for not listed nominal torque values (intermediate ranges possible).
#2	Second torque range	<p>The written second nominal torque value (<math>M_{d_{ns}}</math>) is the smallest possible. Greater second torque ranges can be chosen on demand.</p> <p>Mechanical values and load limits vary between single and dual range torque meters. A data sheet for dual range torque meters with specific values can be requested.</p>
#3	Dimensions	Mechanical dimensions are without engagement. Use the drawings and step files as master for your constructions.
#4	Detail in the drawings	Value can vary by optional components. Please find details to this attribute in the integrated drawings.
#5	Pitch circle diameter	The pitch circle diameter is identically at input and output side for most systems. More information is given in the drawings of a product.
#6	Linearity	Values of Linearity deviation incl. Hysteresis can only be reached if positive and negative sensitivity values are used.
#7	Reference planes	Please check the drawings for information about the reference planes of this attribute.
#8	Temperature range (rotor)	No condensation allowed.
#9	Temperature range (stator)	No condensation allowed. Temperature related to housing ground point.
#10	Load limits	<p>The given values are only valid if no other load occurs at the same time. If the loads in sum are 100%, the max. error will be 0.3% of the nominal torque.</p> <p>Limit and break torque are lower if other loads are applied (such as lateral forces).</p>

## Remarks and information

Link no.	Topic	Remark
#11	Vibration limits	Vibration limits are not an influence to the machine. They reflect the allowed effect onto the rotor (ISO 7919-3). Parameter "n" is given in "r/min."
#12	Weights	Weights are related to components without options like speed detection system. Please contact us for exact weight information of options.
#13	Flatness and concentricity tolerances	The parameters of "Flatness and concentricity tolerances rotor" are manufacturing tolerances.
#14	Supply voltage	The supply voltage range must be given at measurement system side. Long wires can reduce the voltage level from power supply to measurement system.


## Drawing

iS




Rotor & stator with integrated evaluation unit (TCU)  
Rotor & Stator mit integrierter Auswertereinheit (TCU)

eS

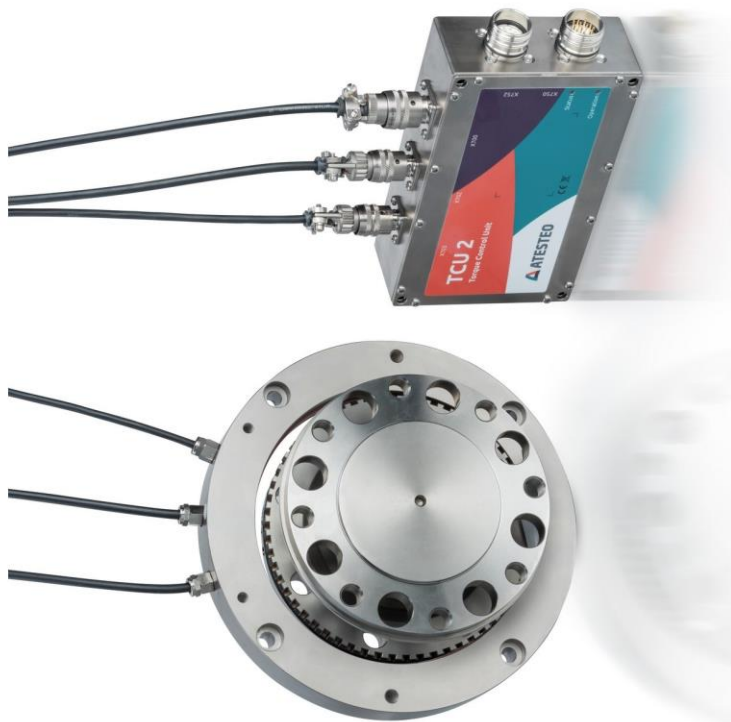


Rotor, ring stator & external evaluation unit (TCU)  
Rotor, Ringstator & abgesetzte Auswertereinheit (TCU)


Drawing

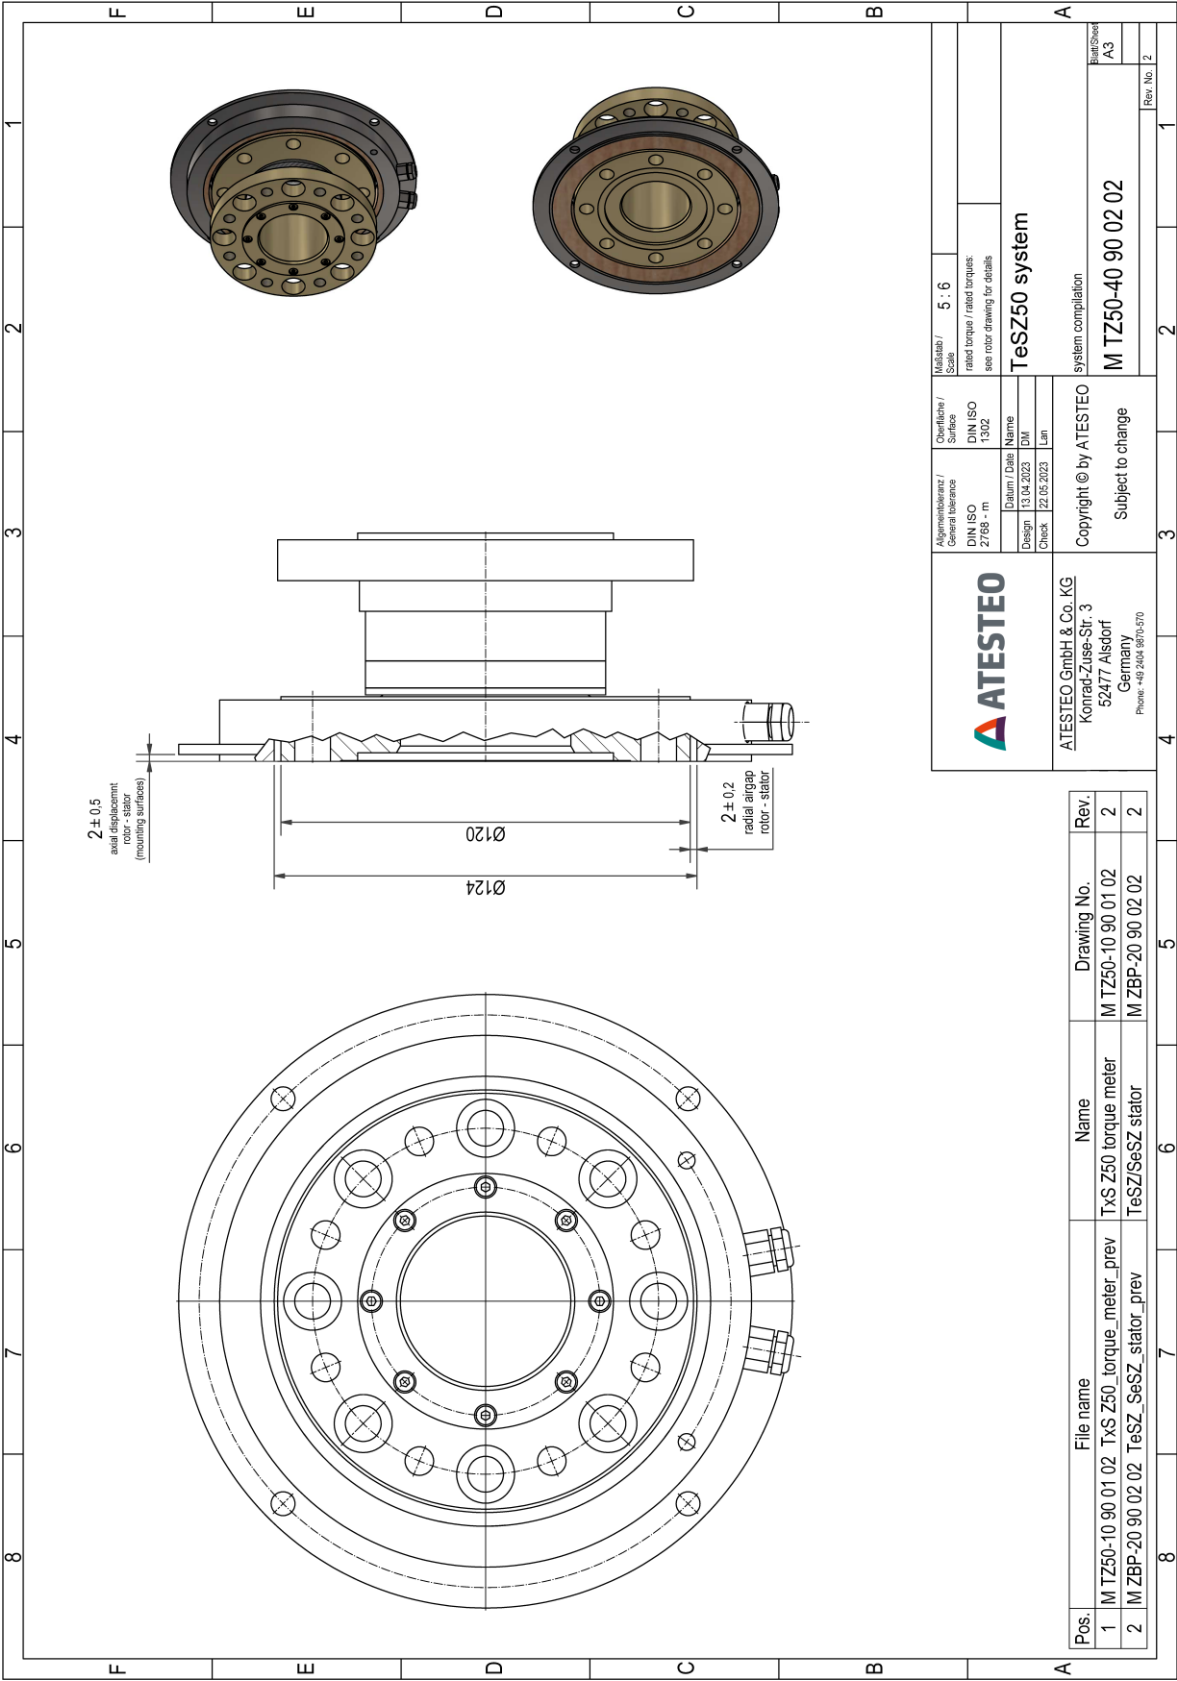

Drawing

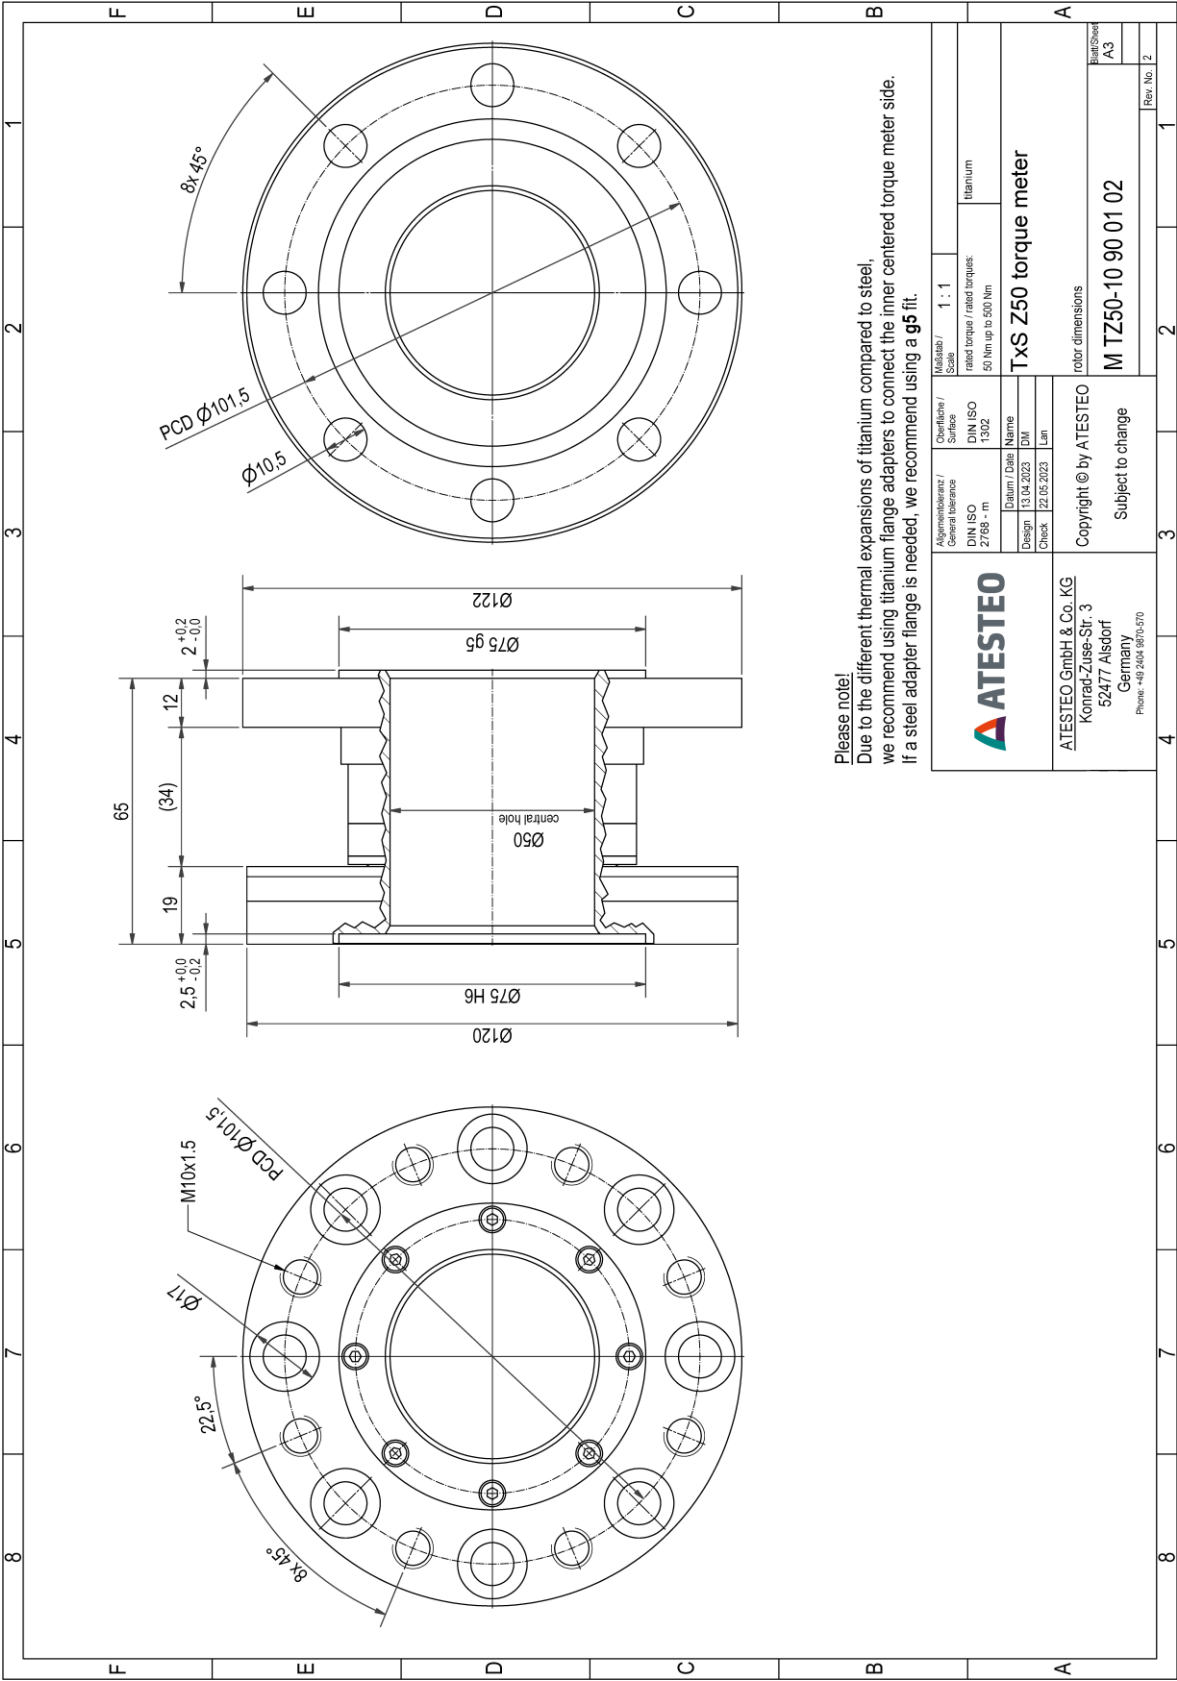


Drawing

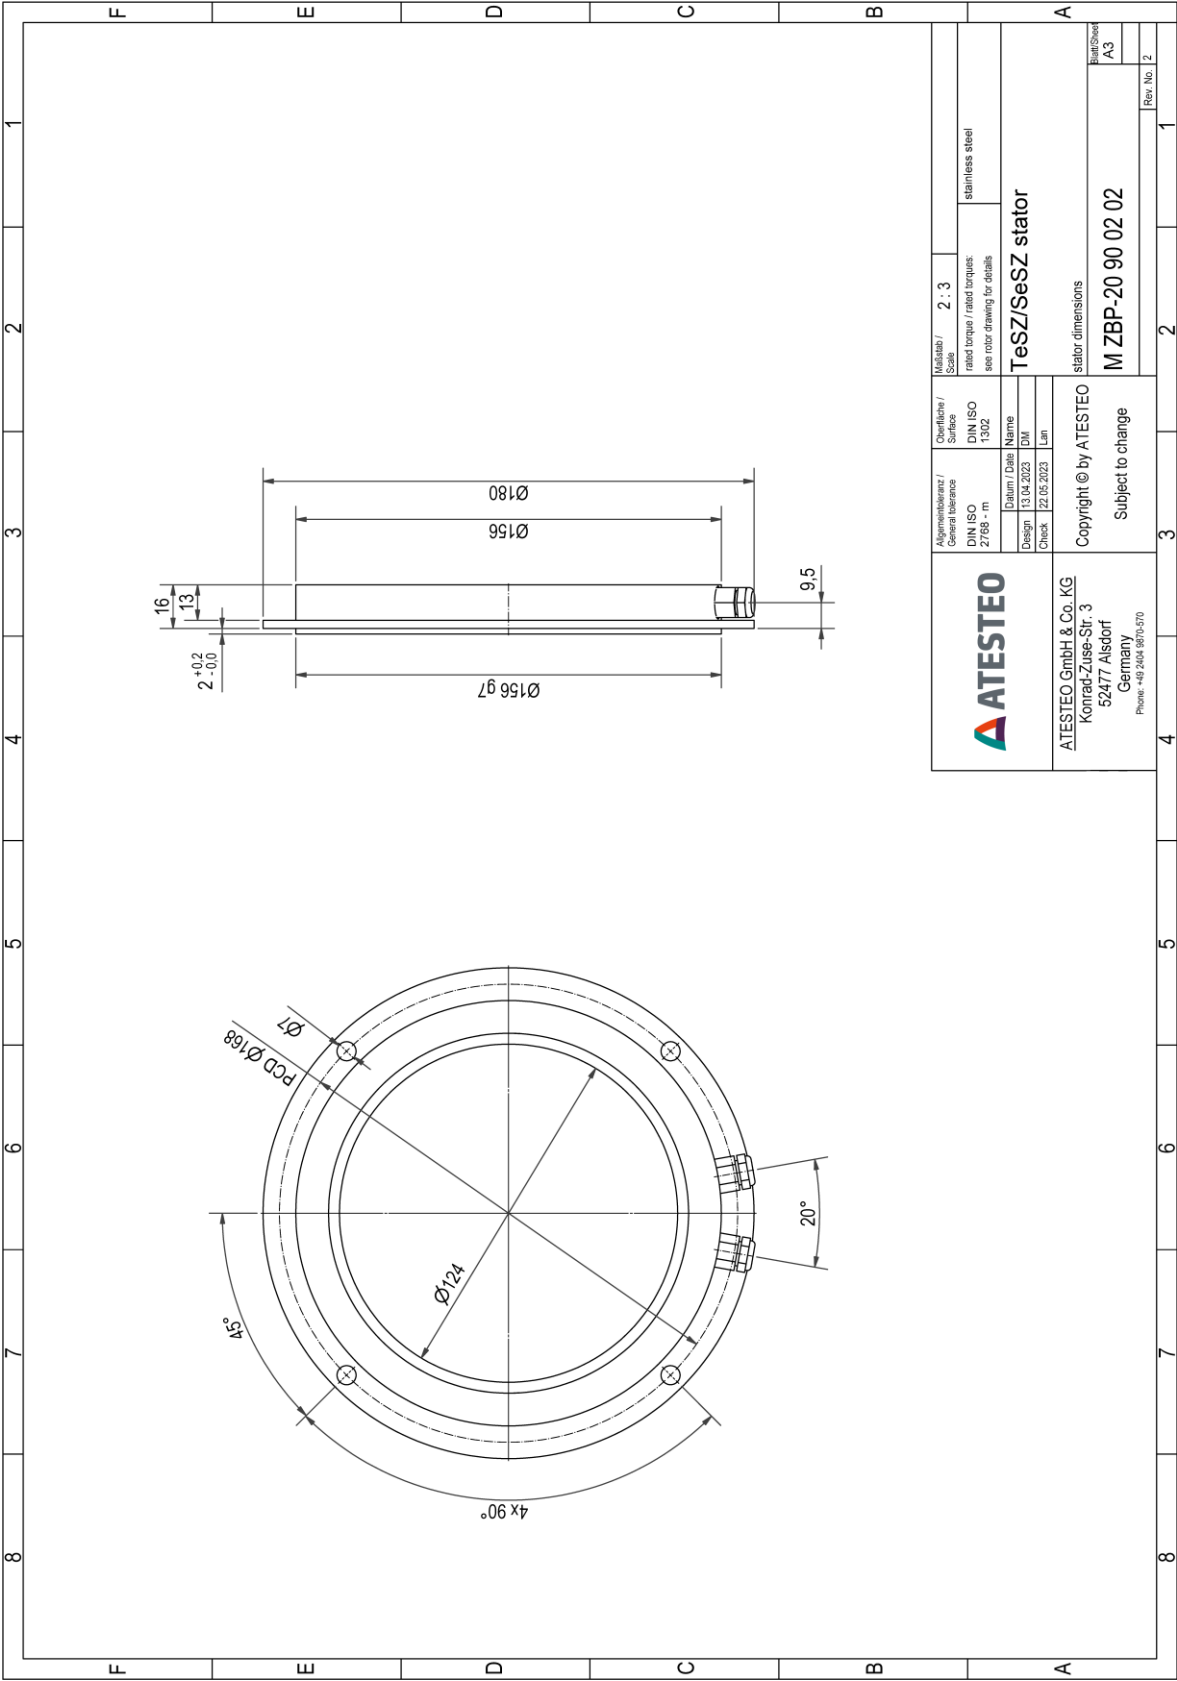




## Drawing

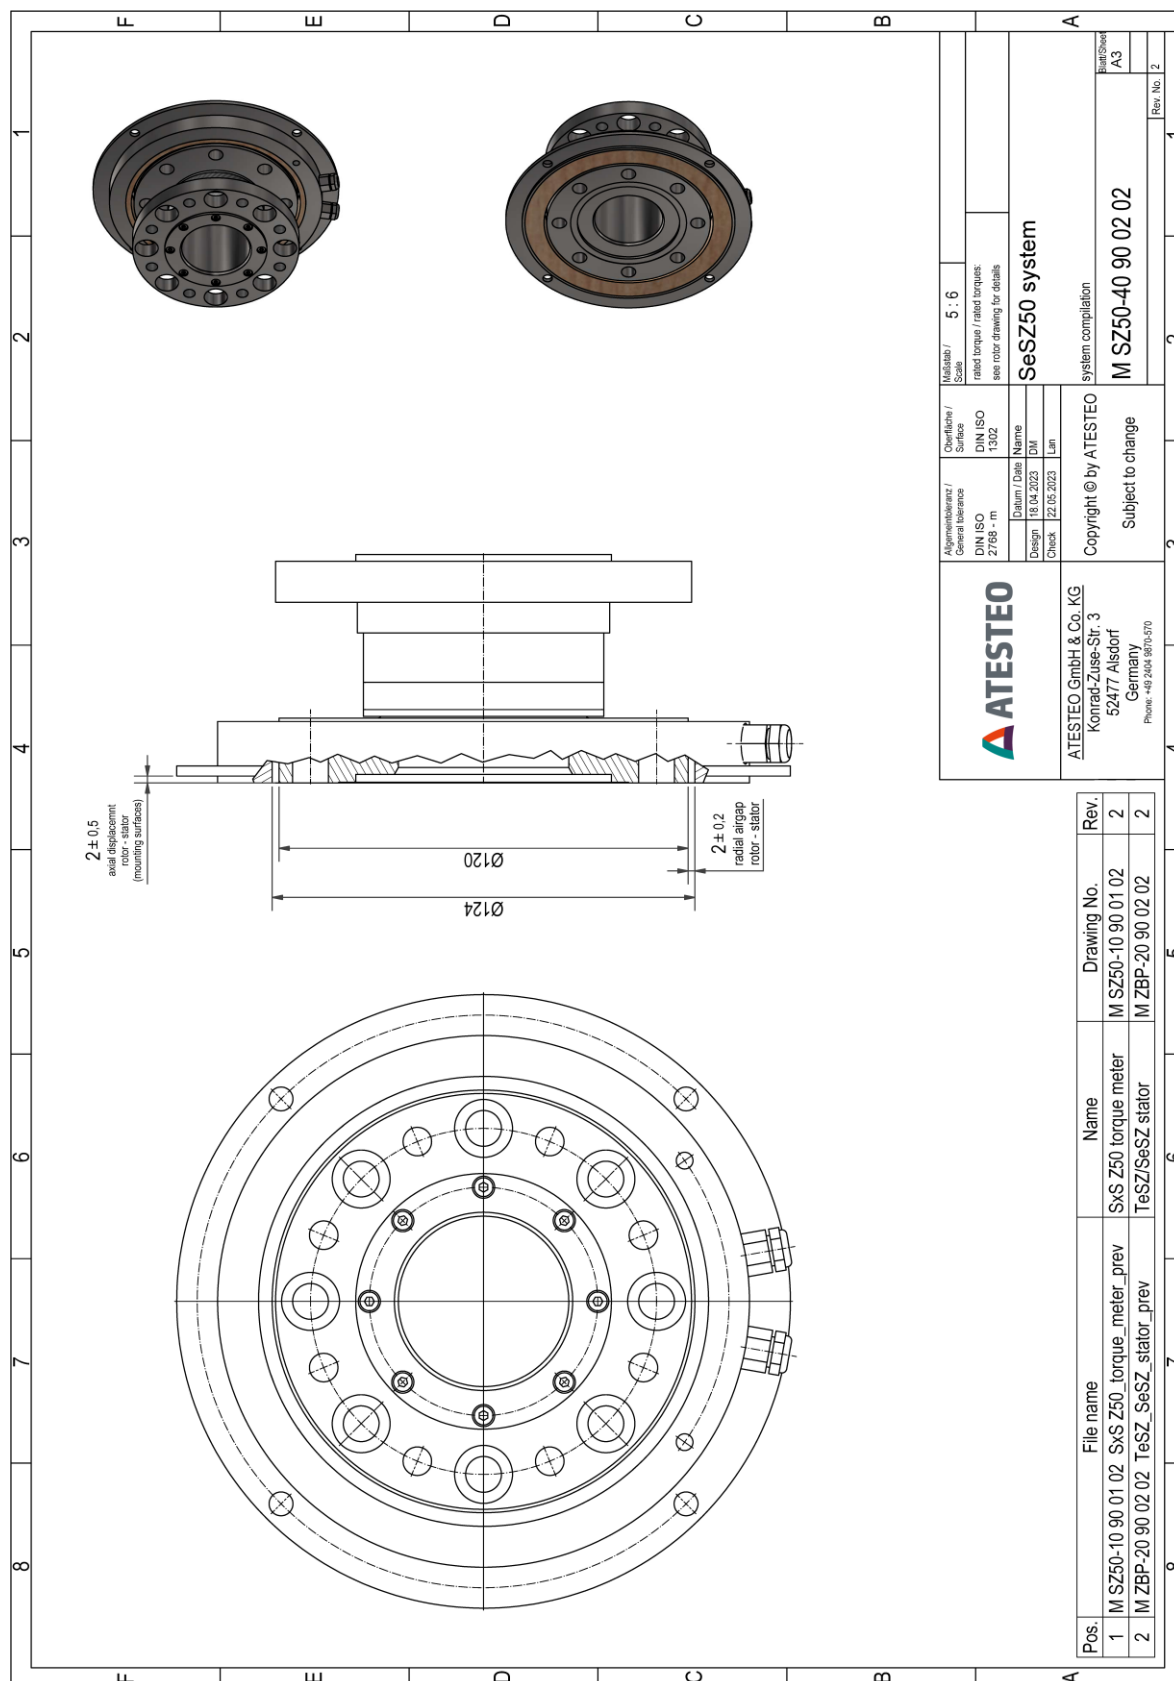

©2024, ATESTEO GmbH & Co. KG, This product data sheet was created on 03.05.2024.

The information contained in the product data sheet corresponds to the status quo at the time the document was created. ATESTEO continually further develops its products and reserves the right to make changes to the technical data. ATESTEO does not accept any liability for consequential losses arising from the use of this product data sheet or the information contained therein.


## Drawing

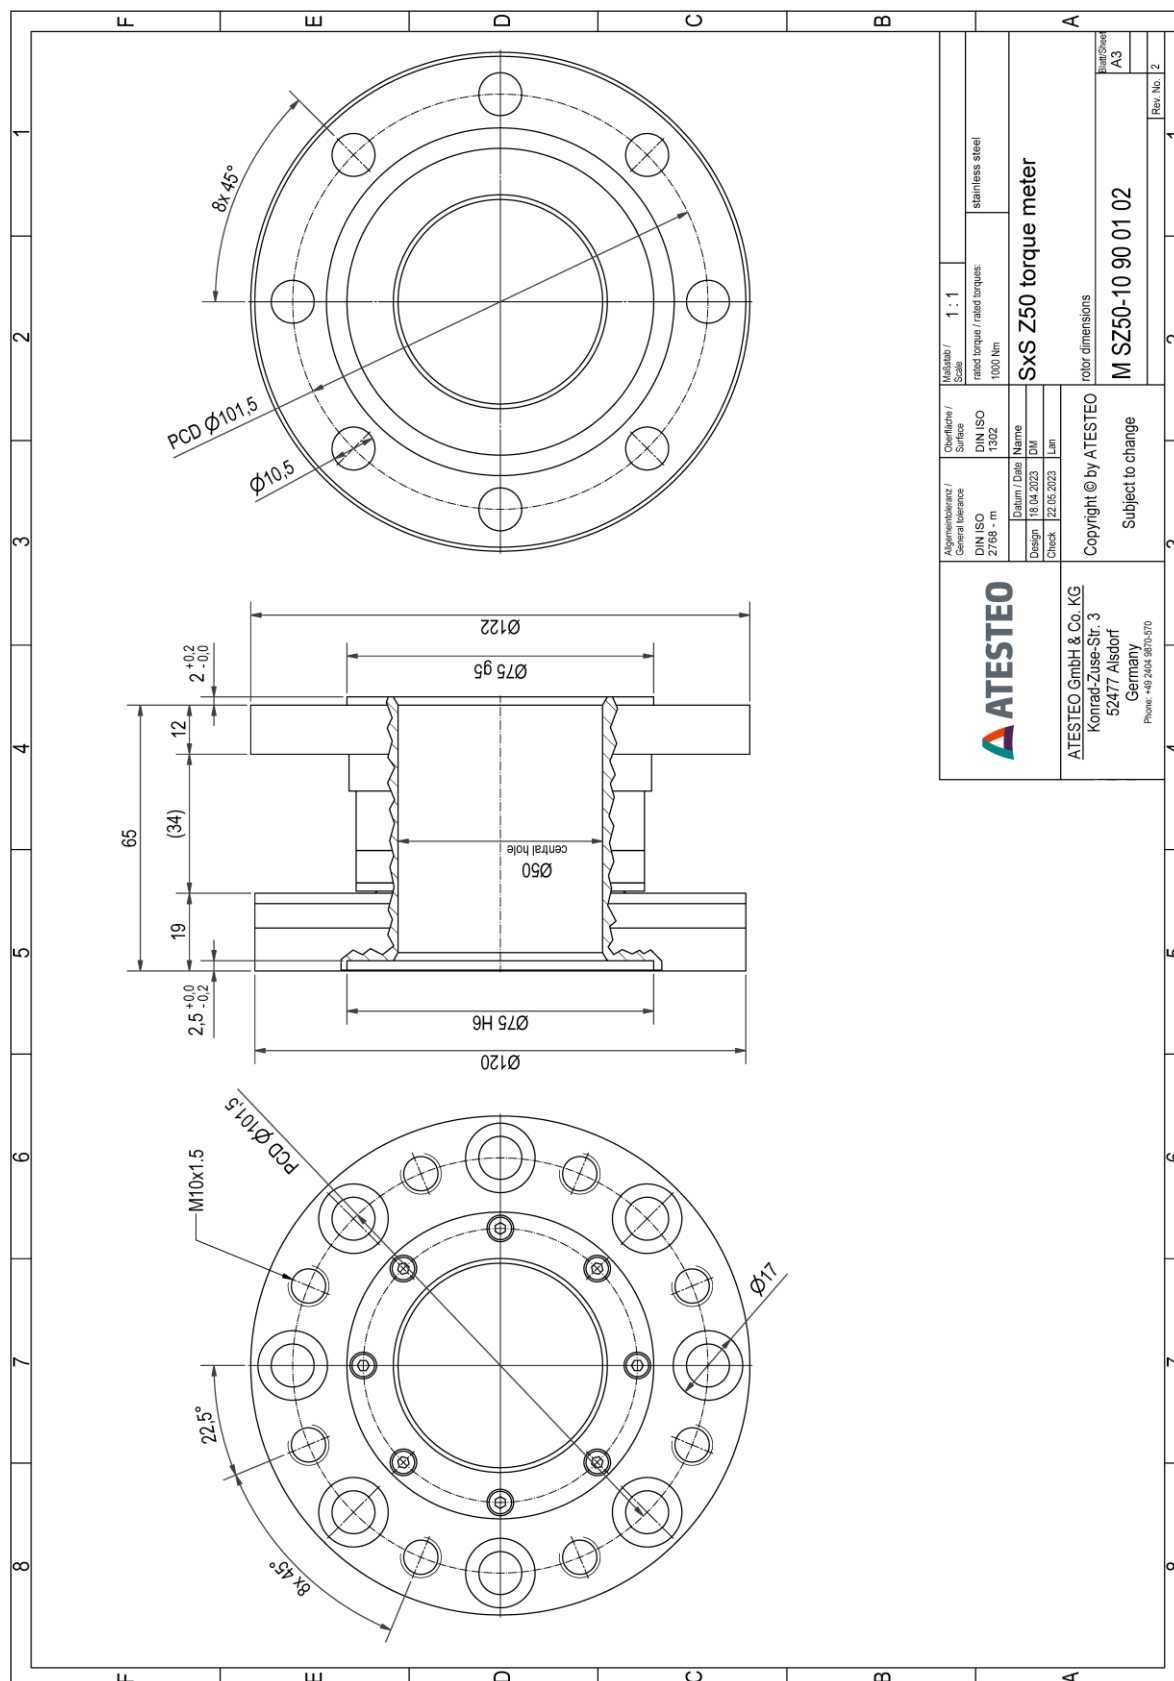

©2024, ATESTEO GmbH & Co. KG, This product data sheet was created on 03.05.2024.

The information contained in the product data sheet corresponds to the status quo at the time the document was created. ATESTEO continually further develops its products and reserves the right to make changes to the technical data. ATESTEO does not accept any liability for consequential losses arising from the use of this product data sheet or the information contained therein.


## Drawing

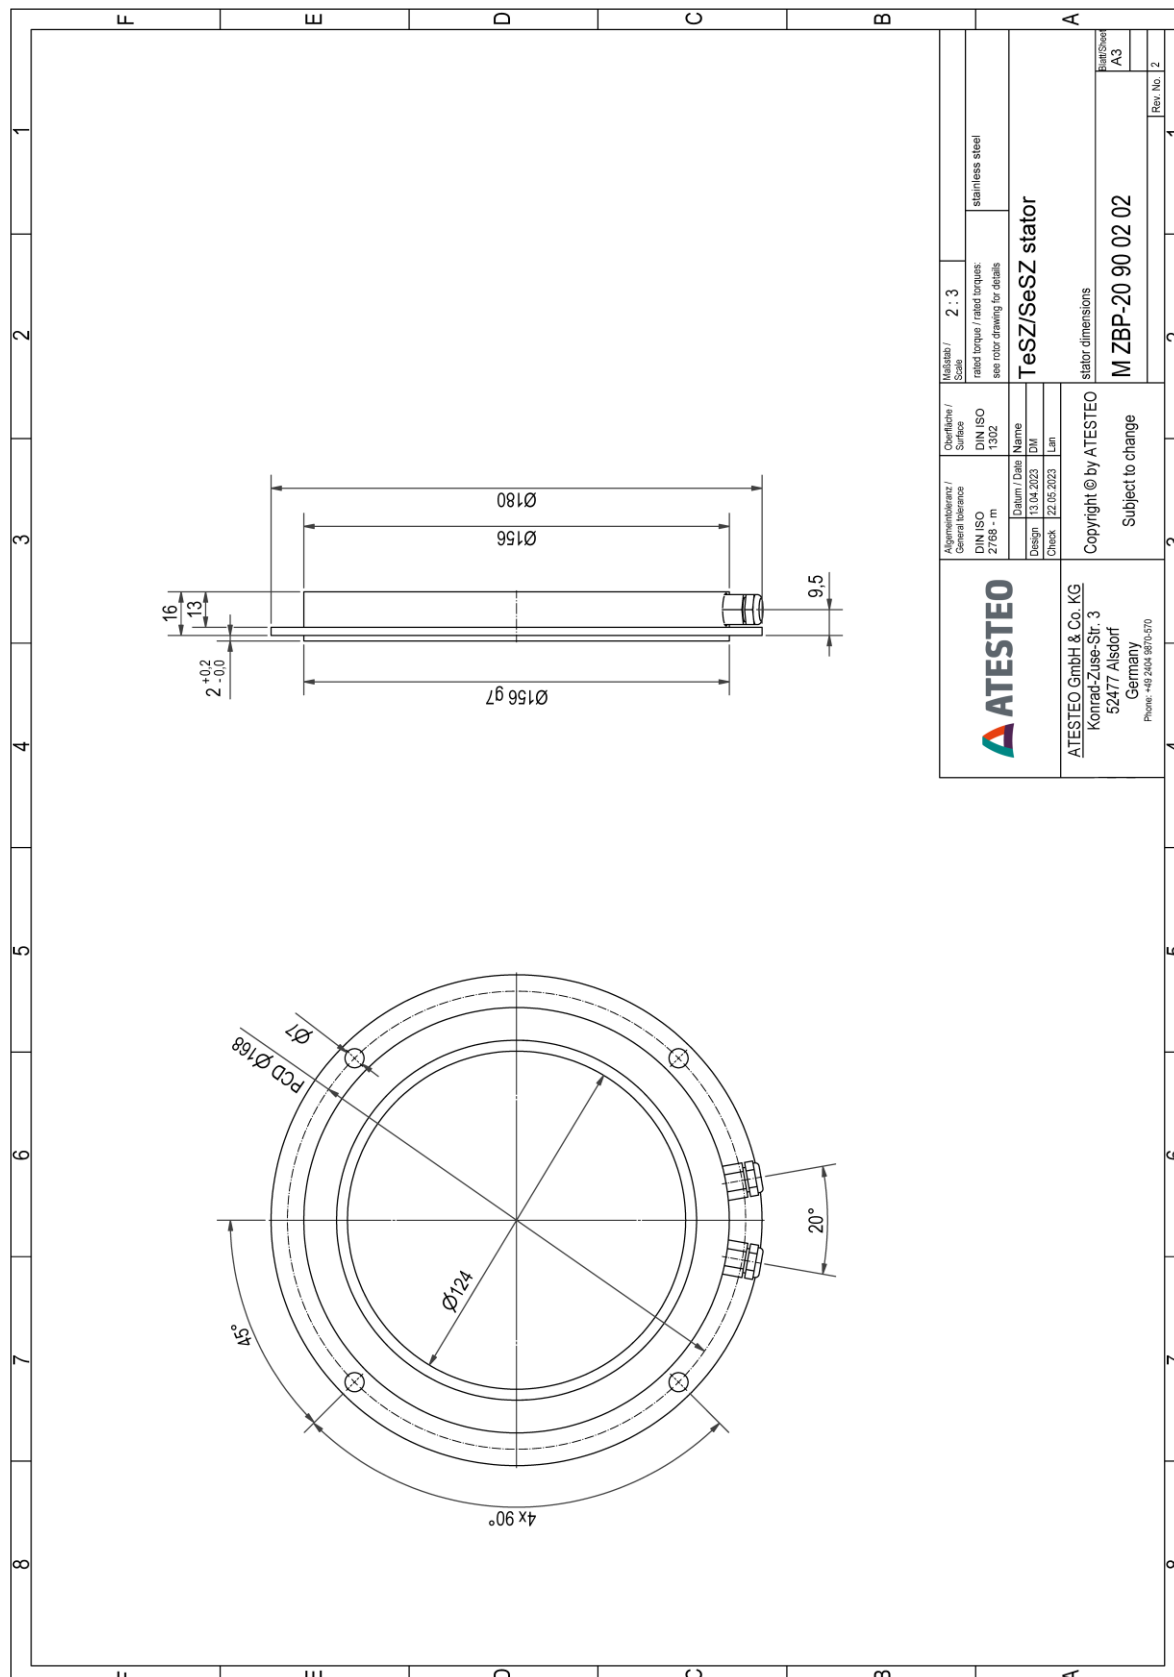

©2024, ATESTEO GmbH & Co. KG, This product data sheet was created on 03.05.2024.

The information contained in the product data sheet corresponds to the status quo at the time the document was created. ATESTEO continually further develops its products and reserves the right to make changes to the technical data. ATESTEO does not accept any liability for consequential losses arising from the use of this product data sheet or the information contained therein.

Drawing

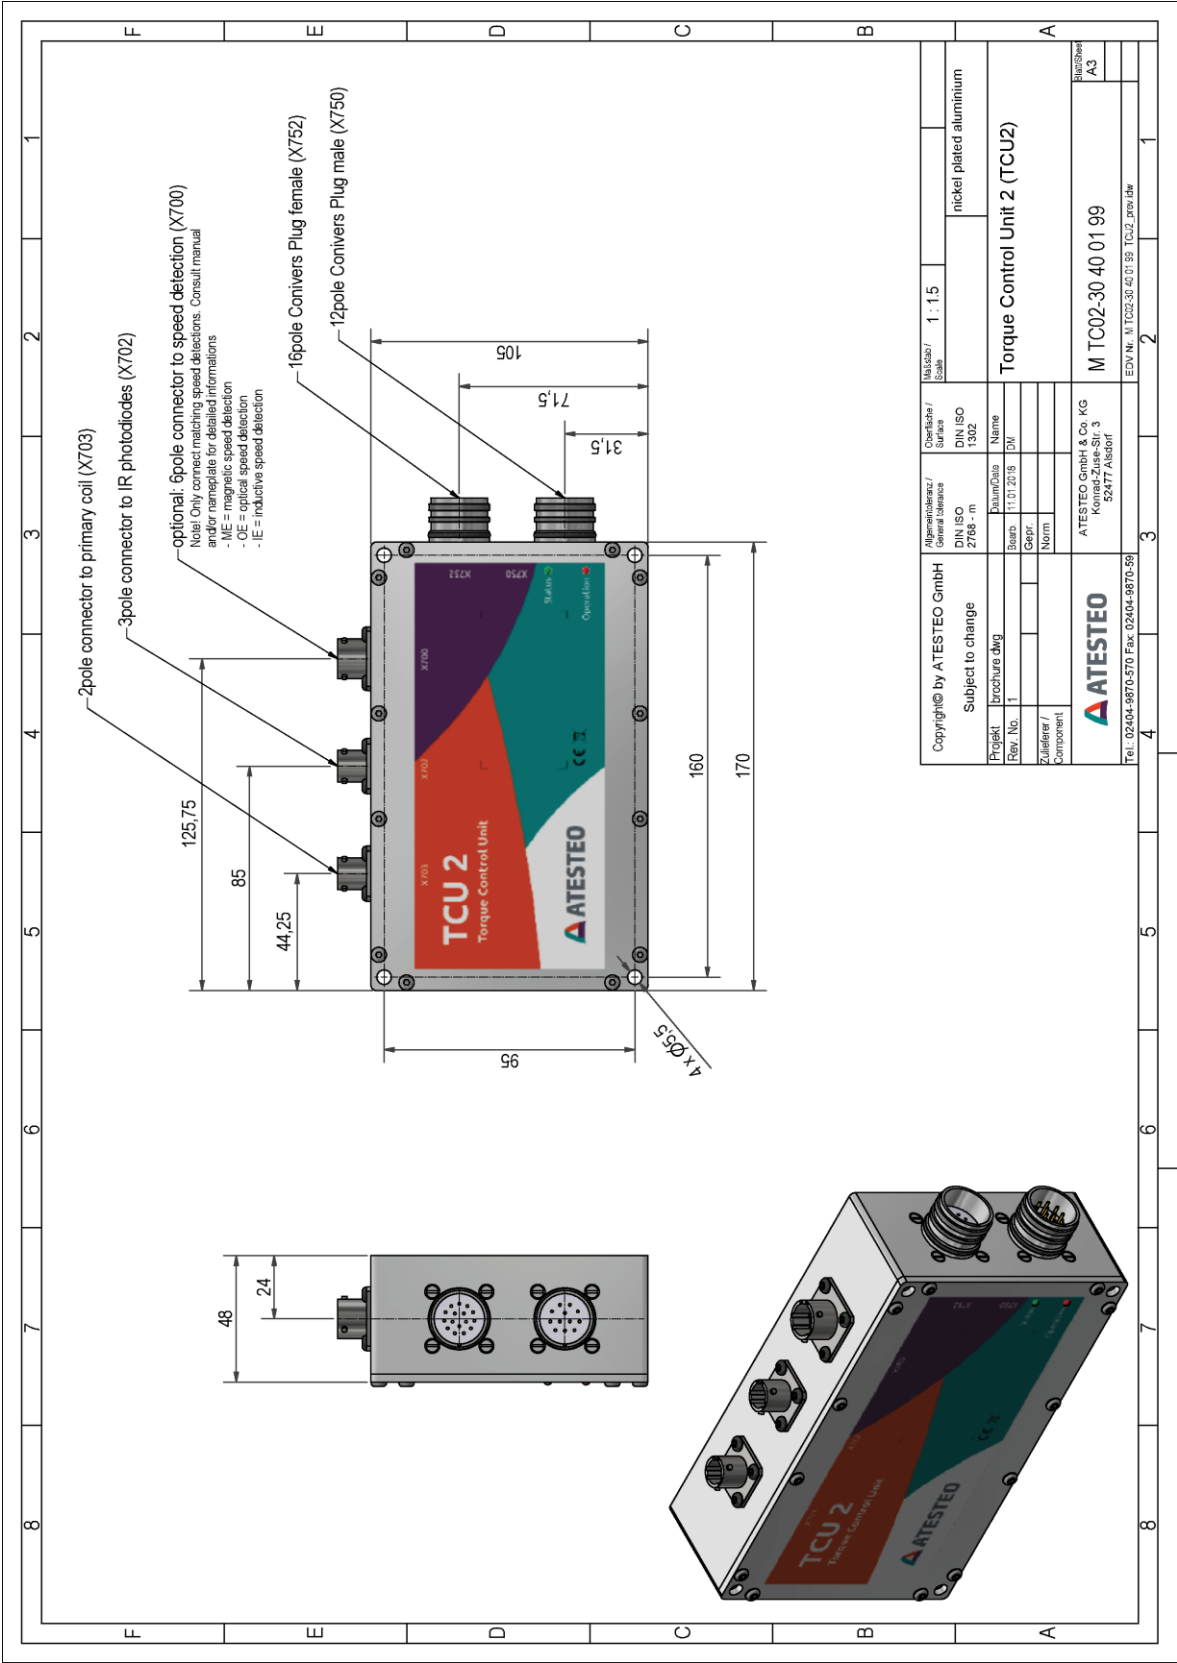

**Would you like to learn more about our products, solutions, and services in the area of measuring systems, vehicle equipment, and actuators? Just call us at +49 (0) 2404 9870 570 or send email to [equipment@atesteo.com](mailto:equipment@atesteo.com). Your personal ATESTEO contact would be pleased to assist you.**



ATESTEO GmbH & Co. KG  
Konrad-Zuse-Straße 3  
52477 Alsdorf  
Germany

Phone	+49 (0) 2404 9870 - 0
Email	<a href="mailto:info@atesteo.com">info@atesteo.com</a>

<https://www.atesteo.com/en/>