


# Platinum Resistance Temperature Detectors

## Detector Interchangeability Tolerance Chart

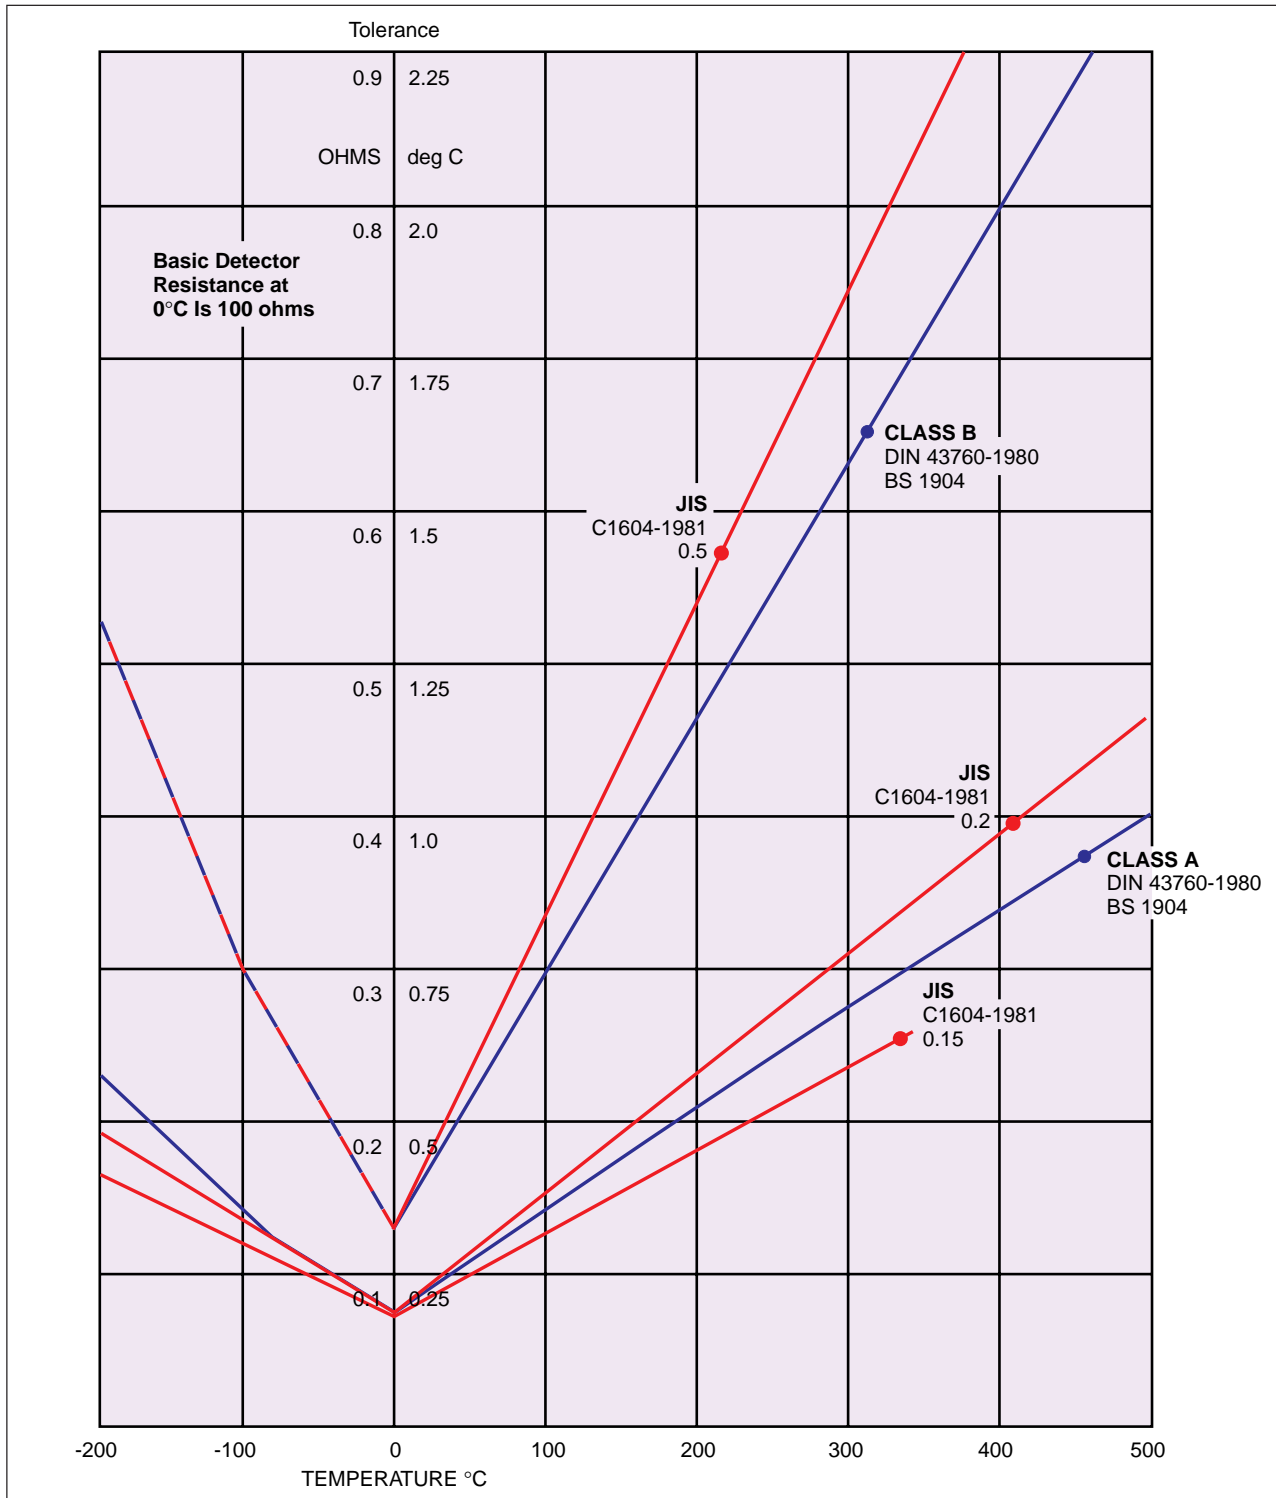

# RTD Tables

## According to DIN EN 60751 for Class B and Class A

<b>Resistance vs Temperature Tables</b> <b>According to DIN EN 60751 for Class B and Class A</b> $\alpha = .00385$ per ITS-90	
$t \geq 0^{\circ}\text{C} :$ $R(t) = R_0 \cdot (1 + A \cdot t + B \cdot t^2)$ with $A = 3,9083 \cdot 10^{-3} \text{ }^{\circ}\text{C}^{-1}$ $B = -5,775 \cdot 10^{-7} \text{ }^{\circ}\text{C}^{-2}$ $R_0 = 100\Omega$	$t < 0^{\circ}\text{C} :$ $R(t) = R_0 \cdot [1 + A \cdot t + B \cdot t^2 + C \cdot (t - 100^{\circ}\text{C}) \cdot t^3]$ with $A = 3,9083 \cdot 10^{-3} \text{ }^{\circ}\text{C}^{-1}$ $B = -5,775 \cdot 10^{-7} \text{ }^{\circ}\text{C}^{-2}$ $C = -4,183 \cdot 10^{-13} \text{ }^{\circ}\text{C}$ $R_0 = 100\Omega$
	<b>Class B:</b> $dt = \pm(0.3 + 0.005 \cdot  t )^{\circ}\text{C}$
	<b>Class A</b> $dt = \pm(0.15 + 0.002 \cdot  t )^{\circ}\text{C}$



**GUEMISA** (Electrónica Guerra y Miró Guemisa S.L.)  
Sta. Virgilia, 29 - local - 28033 Madrid (Spain)  
Tlfn.: (034) 91 764 21 00 Fax.: (034) 91 764 21 32  
Email.: [ventas@guemisa.com](mailto:ventas@guemisa.com) Web.: [www.guemisa.com](http://www.guemisa.com)